

# DATA SHEET

For a complete data sheet, please also download:

- The IC06 74HC/HCT/HCU/HCMOS Logic Family Specifications
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Information
- The IC06 74HC/HCT/HCU/HCMOS Logic Package Outlines

## 74HC/HCT221

Dual non-retriggerable monostable  
multivibrator with reset

Product specification  
Supersedes data of April 1988  
File under Integrated Circuits, IC06

December 1990

# Dual non-retriggerable monostable multivibrator with reset

## 74HC/HCT221

### FEATURES

- Pulse width variance is typically less than  $\pm 5\%$
- Pin-out identical to "123"
- Overriding reset terminates output pulse
- nB inputs have hysteresis for improved noise immunity
- Output capability: standard (except for nR<sub>EXT</sub>/C<sub>EXT</sub>)
- I<sub>CC</sub> category: MSI

### GENERAL DESCRIPTION

The 74HC/HCT221 are high-speed Si-gate CMOS devices and are pin compatible with low power Schottky TTL (LSTTL). They are specified in compliance with JEDEC standard no. 7A.

The 74HC/HCT221 are dual non-retriggerable monostable multivibrators. Each multivibrator features an active LOW-going edge input (nA) and an active HIGH-going edge input (nB), either of which can be used as an enable input.

Pulse triggering occurs at a particular voltage level and is not directly related to the transition time of the input pulse. Schmitt-trigger input circuitry for the nB inputs allow

jitter-free triggering from inputs with slow transition rates, providing the circuit with excellent noise immunity.

Once triggered, the outputs (nQ, nQ̄) are independent of further transitions of nA and nB inputs and are a function of the timing components. The output pulses can be terminated by the overriding active LOW reset inputs (nR<sub>D</sub>). Input pulses may be of any duration relative to the output pulse.

Pulse width stability is achieved through internal compensation and is virtually independent of V<sub>CC</sub> and temperature. In most applications pulse stability will only be limited by the accuracy of the external timing components.

The output pulse width is defined by the following relationship:

$$t_W = C_{EXT} R_{EXT} \ln 2$$

$$t_W = 0.7 C_{EXT} R_{EXT}$$

Pin assignments for the "221" are identical to those of the "123" so that the "221" can be substituted for those products in systems not using the retrigger by merely changing the value of R<sub>EXT</sub> and/or C<sub>EXT</sub>.

### QUICK REFERENCE DATA

GND = 0 V; T<sub>amb</sub> = 25 °C; t<sub>r</sub> = t<sub>f</sub> = 6 ns

| SYMBOL           | PARAMETER                                               | CONDITIONS                                                                                         | TYPICAL |     | UNIT |
|------------------|---------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------|-----|------|
|                  |                                                         |                                                                                                    | HC      | HCT |      |
| t <sub>PHL</sub> | propagation delay<br>nA, nB, nR <sub>D</sub> to nQ, nQ̄ | C <sub>L</sub> = 15 pF; V <sub>CC</sub> = 5 V;<br>R <sub>EXT</sub> = 5 kΩ; C <sub>EXT</sub> = 0 pF | 29      | 32  | ns   |
| t <sub>PLH</sub> | nA, nB, nR <sub>D</sub> to nQ, nQ̄                      |                                                                                                    | 35      | 36  | ns   |
| C <sub>I</sub>   | input capacitance                                       |                                                                                                    | 3.5     | 3.5 | pF   |
| C <sub>PD</sub>  | power dissipation capacitance per package               | notes 1 and 2                                                                                      | 90      | 96  | pF   |

### Notes

1. C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o) + 0.33 \times C_{EXT} \times V_{CC}^2 \times f_o + D \times 28 \times V_{CC} \quad \text{where:}$$

f<sub>i</sub> = input frequency in MHz; f<sub>o</sub> = output frequency in MHz

∑ (C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of outputs

C<sub>EXT</sub> = timing capacitance in pF; C<sub>L</sub> = output load capacitance in pF

V<sub>CC</sub> = supply voltage in V; D = duty factor in %

2. For HC the condition is V<sub>I</sub> = GND to V<sub>CC</sub>  
For HCT the condition is V<sub>I</sub> = GND to V<sub>CC</sub> – 1.5 V

Dual non-retriggerable monostable  
multivibrator with reset




74HC/HCT221

ORDERING INFORMATION

See “74HC/HCT/HCU/HCMOS Logic Package Information”.

PIN DESCRIPTION

| PIN NO. | SYMBOL                   | NAME AND FUNCTION                        |
|---------|--------------------------|------------------------------------------|
| 1, 9    | $1\bar{A}, 2\bar{A}$     | trigger inputs (negative-edge triggered) |
| 2, 10   | 1B, 2B                   | trigger inputs (positive-edge triggered) |
| 3, 11   | $1\bar{R}_D, 2\bar{R}_D$ | direct reset inputs (active LOW)         |
| 4, 12   | $1\bar{Q}, 2\bar{Q}$     | outputs (active LOW)                     |
| 7       | $2R_{EXT}/C_{EXT}$       | external resistor/capacitor connection   |
| 8       | GND                      | ground (0 V)                             |
| 13, 5   | 1Q, 2Q                   | outputs (active HIGH)                    |
| 14, 6   | $1C_{EXT}, 2C_{EXT}$     | external capacitor connection            |
| 15      | $1R_{EXT}/C_{EXT}$       | external resistor/capacitor connection   |
| 16      | VCC                      | positive supply voltage                  |

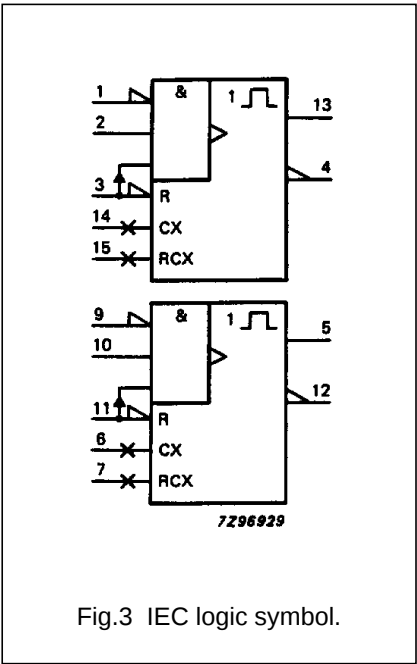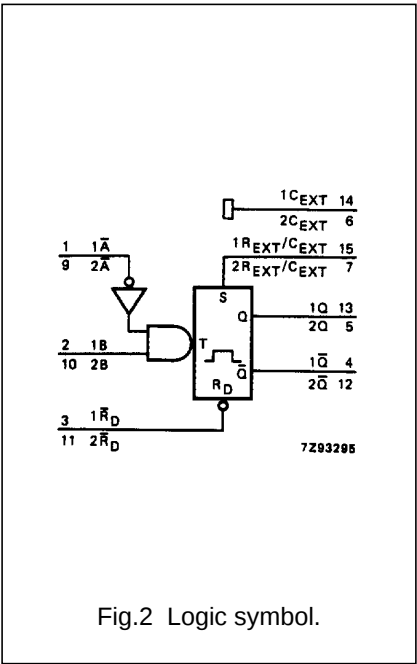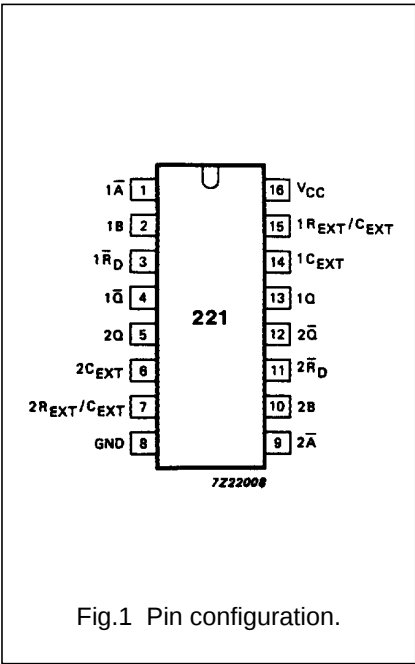

Dual non-retriggerable monostable  
multivibrator with reset

74HC/HCT221

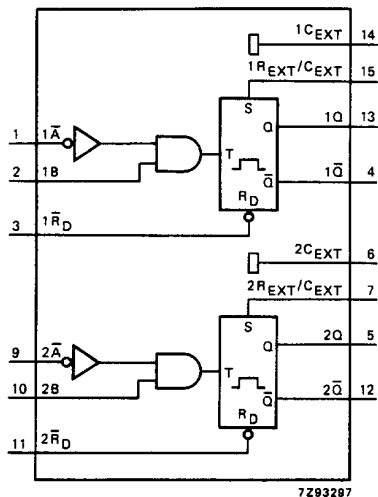


Fig.4 Functional diagram.

FUNCTION TABLE

| INPUTS |    |    | OUTPUTS |       |
|--------|----|----|---------|-------|
| nRD    | nA | nB | nQ      | nQ    |
| L      | X  | X  | L       | H     |
| X      | H  | X  | L (2)   | H (2) |
| X      | X  | L  | L (2)   | H (2) |
| H      | L  | ↑  |         |       |
| H      | ↓  | H  |         |       |
| ↑      | L  | H  |         |       |

Notes

1. H = HIGH voltage level  
L = LOW voltage level  
X = don't care  
↑ = LOW-to-HIGH level  
↓ = HIGH-to-LOW level  
 = one HIGH-level output pulse  
 = one LOW-level output pulse
2. If the monostable was triggered before this condition was established the pulse will continue as programmed.
3. For this combination the reset input must be LOW and the following sequence must be used:  
pin 1 (or 9) must be set HIGH or pin 2 (or 10) set LOW;  
then pin 1 (or 9) must be LOW and pin 2 (or 10) set HIGH. Now the reset input goes from LOW-to-HIGH and the device will be triggered.

## Dual non-retriggerable monostable multivibrator with reset

74HC/HCT221

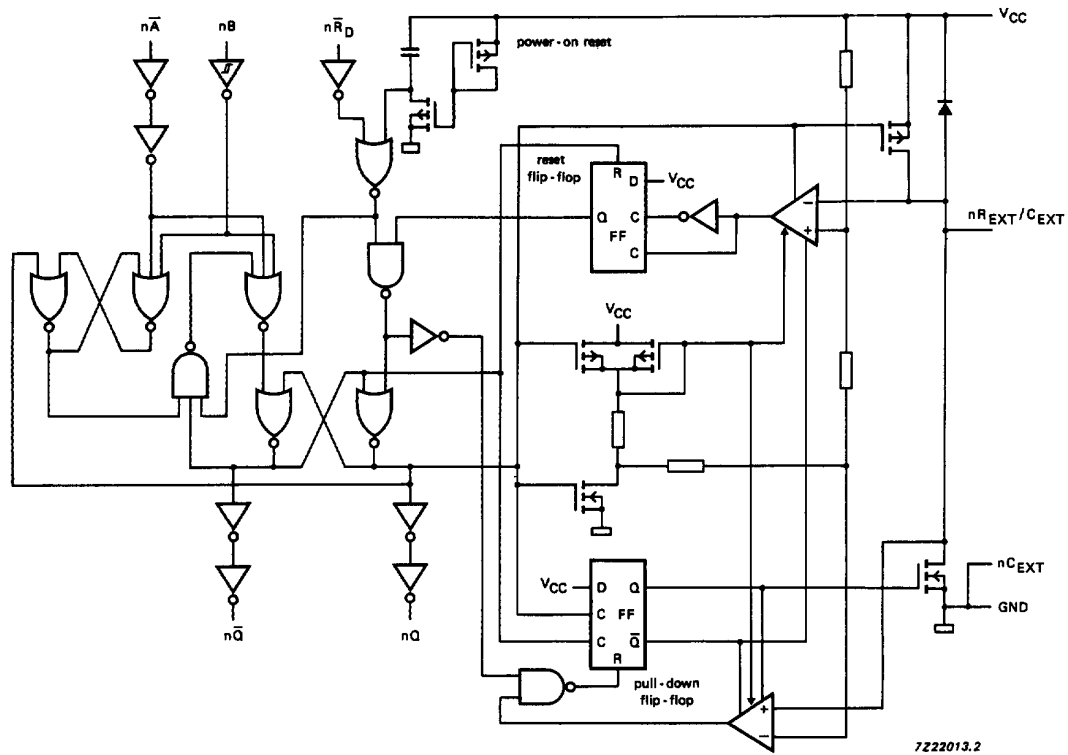


Fig.5 Logic diagram.

### Note

It is recommended to ground pins 6 (2C<sub>EXT</sub>) and 14 (1C<sub>EXT</sub>) externally to pin 8 (GND).




Fig.6 Timing component connections.

# Dual non-retriggerable monostable multivibrator with reset

74HC/HCT221

## DC CHARACTERISTICS FOR 74HC

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: standard (except for  $nR_{EXT}/C_{EXT}$ )

$I_{CC}$  category: MSI

## AC CHARACTERISTICS FOR 74HC

GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

| SYMBOL                                 | PARAMETER                                            | T <sub>amb</sub> (°C) |                |                 |                 |                 |                 |                 | UNIT | TEST CONDITIONS        |                                                                   |
|----------------------------------------|------------------------------------------------------|-----------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|------------------------|-------------------------------------------------------------------|
|                                        |                                                      | 74HC                  |                |                 |                 |                 |                 |                 |      | V <sub>CC</sub><br>(V) | WAVEFORMS                                                         |
|                                        |                                                      | +25                   |                |                 | −40 to +85      |                 | −40 to +125     |                 |      |                        |                                                                   |
|                                        |                                                      | min                   | typ            | max.            | min             | max.            | min.            | max.            |      |                        |                                                                   |
| t <sub>PLH</sub>                       | propagation delay (trigger)<br>nA, nB to nQ          |                       | 72<br>26<br>21 | 220<br>44<br>37 |                 | 275<br>55<br>47 |                 | 330<br>66<br>56 | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PLH</sub>                       | propagation delay (trigger)<br>nR <sub>D</sub> to nQ |                       | 80<br>29<br>23 | 245<br>49<br>42 |                 | 305<br>61<br>52 |                 | 370<br>74<br>63 | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PHL</sub>                       | propagation delay (trigger)<br>nA, nB to nQ          |                       | 58<br>21<br>17 | 180<br>36<br>31 |                 | 225<br>45<br>38 |                 | 270<br>54<br>46 | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PHL</sub>                       | propagation delay (trigger)<br>nR <sub>D</sub> to nQ |                       | 63<br>23<br>18 | 195<br>39<br>33 |                 | 245<br>49<br>42 |                 | 295<br>59<br>50 | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PLH</sub>                       | propagation delay (reset)<br>nR <sub>D</sub> to nQ   |                       | 66<br>24<br>19 | 200<br>40<br>34 |                 | 250<br>50<br>43 |                 | 300<br>60<br>51 | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.11    |
| t <sub>PLH</sub>                       | propagation delay (reset)<br>nR <sub>D</sub> to nQ   |                       | 58<br>21<br>17 | 180<br>36<br>31 |                 | 225<br>45<br>38 |                 | 270<br>54<br>46 | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.11    |
| t <sub>THL</sub> /<br>t <sub>TLH</sub> | output transition time                               |                       | 19<br>7<br>6   | 75<br>15<br>13  |                 | 95<br>19<br>16  |                 | 110<br>22<br>19 | ns   | 2.0<br>4.5<br>6.0      | Fig.10                                                            |
| t <sub>W</sub>                         | trigger pulse width<br>nA = LOW                      | 75<br>15<br>13        | 25<br>9<br>7   |                 | 95<br>19<br>16  |                 | 110<br>22<br>19 |                 | ns   | 2.0<br>4.5<br>6.0      | Fig.7                                                             |
| t <sub>W</sub>                         | trigger pulse width<br>nB = HIGH                     | 90<br>18<br>15        | 30<br>11<br>9  |                 | 115<br>23<br>20 |                 | 135<br>27<br>23 |                 | ns   | 2.0<br>4.5<br>6.0      | Fig.7                                                             |
| t <sub>W</sub>                         | trigger pulse width<br>nR <sub>D</sub> = LOW         | 75<br>15<br>13        | 25<br>9<br>7   |                 | 95<br>19<br>16  |                 | 110<br>22<br>19 |                 | ns   | 2.0<br>4.5<br>6.0      | Fig.8                                                             |
| t <sub>W</sub>                         | output pulse width<br>nQ = LOW<br>nQ = HIGH          | 630                   | 700            | 770             | 602             | 798             | 595             | 805             | μs   | 5.0                    | C <sub>EXT</sub> = 100 nF;<br>R <sub>EXT</sub> = 10 kΩ;<br>Fig.10 |

# Dual non-retriggerable monostable multivibrator with reset

74HC/HCT221

| SYMBOL           | PARAMETER                                               | T <sub>amb</sub> (°C) |               |              |                 |      |                 |      | UNIT | TEST CONDITIONS        |                                                                 |
|------------------|---------------------------------------------------------|-----------------------|---------------|--------------|-----------------|------|-----------------|------|------|------------------------|-----------------------------------------------------------------|
|                  |                                                         | 74HC                  |               |              |                 |      |                 |      |      | V <sub>CC</sub><br>(V) | WAVEFORMS                                                       |
|                  |                                                         | +25                   |               |              | −40 to +85      |      | −40 to +125     |      |      |                        |                                                                 |
|                  |                                                         | min                   | typ           | max.         | min             | max. | min.            | max. |      |                        |                                                                 |
| t <sub>w</sub>   | output pulse width<br>nQ or nQ̄                         |                       | 140           |              | –               |      | –               |      | ns   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 28 nF;<br>R <sub>EXT</sub> = 2 kΩ;<br>Fig.10 |
| t <sub>w</sub>   | output pulse width<br>nQ or nQ̄                         |                       | 1.5           |              | –               |      | –               |      | μs   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 1 nF;<br>R <sub>EXT</sub> = 2 kΩ;<br>Fig.10  |
| t <sub>w</sub>   | output pulse width<br>nQ or nQ̄                         |                       | 7             |              | –               |      | –               |      | μs   | 2.0<br>4.5<br>6.0      | C <sub>EXT</sub> = 1 nF;<br>R <sub>EXT</sub> = 10 kΩ;<br>Fig.10 |
| t <sub>w</sub>   | pulse width match<br>between circuits<br>in the package |                       | ± 2           |              | –               |      | –               |      | %    | 4.5<br>to<br>5.5       | C <sub>EXT</sub> = 1000 pF;<br>R <sub>EXT</sub> = 10 kΩ         |
| t <sub>rem</sub> | removal time<br>nR <sub>D</sub> to nĀ<br>or nB          | 100<br>20<br>17       | 30<br>11<br>9 |              | 125<br>25<br>21 |      | 150<br>30<br>26 |      | ns   | 2.0<br>4.5<br>6.0      | Fig.9                                                           |
| R <sub>EXT</sub> | external timing resistor                                | 10<br>2               |               | 1000<br>1000 | –<br>–          |      | –<br>–          |      | kΩ   | 2.0<br>5.0             | Fig.12<br>Fig.13                                                |
| C <sub>EXT</sub> | external timing capacitor                               | no limits             |               |              |                 |      |                 |      | pF   | 2.0<br>5.0             | Fig.12<br>Fig.13                                                |

---

## Dual non-retriggerable monostable multivibrator with reset

---

74HC/HCT221

### DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see *"74HC/HCT/HCU/HCMOS Logic Family Specifications"*.

Output capability: standard (except for  $nR_{EXT}/C_{EXT}$ )

$I_{CC}$  category: MSI

### Note to HCT types

The value of additional quiescent supply current ( $\Delta I_{CC}$ ) for a unit load of 1 is given in the family specifications. To determine  $\Delta I_{CC}$  per input, multiply this value by the unit load coefficient shown in the table below.

| INPUT        | UNIT LOAD COEFFICIENT |
|--------------|-----------------------|
| nB           | 0.30                  |
| $n\bar{A}$   | 0.50                  |
| $n\bar{R}_D$ | 0.50                  |

# Dual non-retriggerable monostable multivibrator with reset

74HC/HCT221

**AC CHARACTERISTICS FOR 74HCT**GND = 0 V;  $t_r = t_f = 6$  ns;  $C_L = 50$  pF

| SYMBOL                              | PARAMETER                                                | T <sub>amb</sub> (°C) |     |     |            |      |             |      | UNIT | TEST CONDITIONS        |                                                                   |
|-------------------------------------|----------------------------------------------------------|-----------------------|-----|-----|------------|------|-------------|------|------|------------------------|-------------------------------------------------------------------|
|                                     |                                                          | 74HCT                 |     |     |            |      |             |      |      | V <sub>CC</sub><br>(V) | WAVEFORMS                                                         |
|                                     |                                                          | +25                   |     |     | −40 to +85 |      | −40 to +125 |      |      |                        |                                                                   |
|                                     |                                                          | min                   | typ | max | min        | max. | min.        | max. |      |                        |                                                                   |
| t <sub>PLH</sub>                    | propagation delay (trigger)<br>nA, nR <sub>D</sub> to nQ |                       | 30  | 50  |            | 63   |             | 75   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PLH</sub>                    | propagation delay (trigger)<br>nB to nQ                  |                       | 24  | 42  |            | 53   |             | 63   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PHL</sub>                    | propagation delay (trigger)<br>nA to nQ̄                 |                       | 26  | 44  |            | 55   |             | 66   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PHL</sub>                    | propagation delay (trigger)<br>nB to nQ̄                 |                       | 21  | 35  |            | 44   |             | 53   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PHL</sub>                    | propagation delay (trigger)<br>nR <sub>D</sub> to nQ̄    |                       | 26  | 43  |            | 54   |             | 65   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.10    |
| t <sub>PHL</sub>                    | propagation delay (reset)<br>nR <sub>D</sub> to nQ       |                       | 26  | 43  |            | 54   |             | 65   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.11    |
| t <sub>PLH</sub>                    | propagation delay (reset)<br>nR <sub>D</sub> to nQ̄      |                       | 31  | 51  |            | 64   |             | 77   | ns   | 4.5                    | C <sub>EXT</sub> = 0 pF;<br>R <sub>EXT</sub> = 5 kΩ;<br>Fig.11    |
| t <sub>THL</sub> / t <sub>TLH</sub> | output transition time                                   |                       | 7   | 15  |            | 19   |             | 22   | ns   | 4.5                    | Fig.10                                                            |
| t <sub>w</sub>                      | trigger pulse width<br>nA = LOW                          | 20                    | 13  |     | 25         |      | 30          |      | ns   | 4.5                    | Fig.10                                                            |
| t <sub>w</sub>                      | trigger pulse width<br>nB = HIGH                         | 20                    | 13  |     | 25         |      | 30          |      | ns   | 4.5                    | Fig.10                                                            |
| t <sub>w</sub>                      | pulse width<br>nR <sub>D</sub> = LOW                     | 22                    | 13  |     | 28         |      | 33          |      | ns   | 4.5                    | Fig.8                                                             |
| t <sub>w</sub>                      | output pulse width<br>nQ̄ = LOW<br>nQ = HIGH             | 630                   | 700 | 770 | 602        | 798  | 595         | 805  | μs   | 5.0                    | C <sub>EXT</sub> = 100 nF;<br>R <sub>EXT</sub> = 10 kΩ;<br>Fig.10 |
| t <sub>w</sub>                      | trigger pulse width<br>nQ or nQ̄                         |                       | 140 |     | –          |      | –           |      | ns   | 4.5                    | C <sub>EXT</sub> = 28 pF;<br>R <sub>EXT</sub> = 2 kΩ;<br>Fig.10   |
| t <sub>w</sub>                      | trigger pulse width<br>nQ or nQ̄                         |                       | 1.5 |     | –          |      | –           |      | μs   | 4.5                    | C <sub>EXT</sub> = 1 nF;<br>R <sub>EXT</sub> = 2 kΩ;<br>Fig.10    |

# Dual non-retriggerable monostable multivibrator with reset






74HC/HCT221

| SYMBOL           | PARAMETER                                   | T <sub>amb</sub> (°C) |     |      |            |      |             |      | UNIT | TEST CONDITIONS        |                                                                 |
|------------------|---------------------------------------------|-----------------------|-----|------|------------|------|-------------|------|------|------------------------|-----------------------------------------------------------------|
|                  |                                             | 74HCT                 |     |      |            |      |             |      |      | V <sub>CC</sub><br>(V) | WAVEFORMS                                                       |
|                  |                                             | +25                   |     |      | −40 to +85 |      | −40 to +125 |      |      |                        |                                                                 |
|                  |                                             | min                   | typ | max  | min        | max. | min.        | max. |      |                        |                                                                 |
| t <sub>w</sub>   | trigger pulse width<br>nQ or nQ̄            |                       | 7   |      | –          |      | –           |      | μs   | 4.5                    | C <sub>EXT</sub> = 1 nF;<br>R <sub>EXT</sub> = 10 kΩ;<br>Fig.10 |
| t <sub>rem</sub> | removal time<br>nR <sub>D</sub> to nA or nB | 20                    | 12  |      | 25         |      | 30          |      | ns   | 4.5                    | Fig.9                                                           |
| R <sub>EXT</sub> | external timing resistor                    | 2                     |     | 1000 | –          |      | –           |      | kΩ   | 5.0                    | Fig.13                                                          |
| C <sub>EXT</sub> | external timing capacitor                   | no limits             |     |      |            |      |             |      | pF   | 5.0                    | Fig.13                                                          |

# Dual non-retriggerable monostable multivibrator with reset


74HC/HCT221

## AC WAVEFORMS

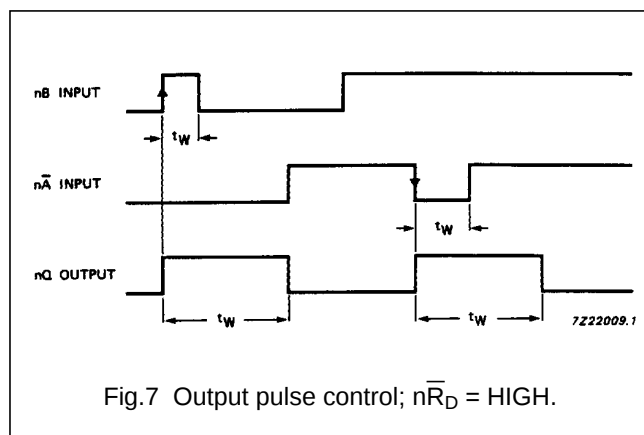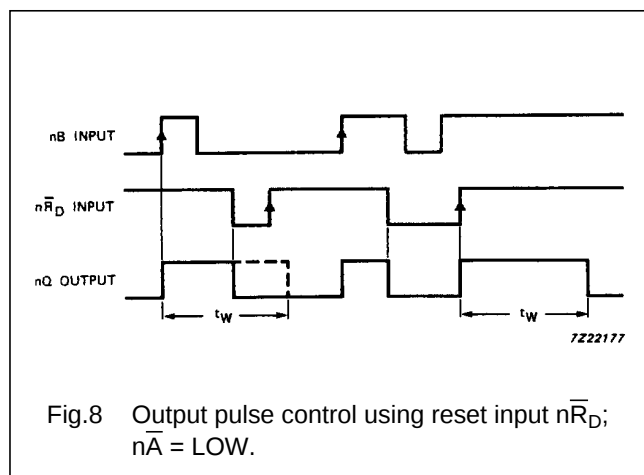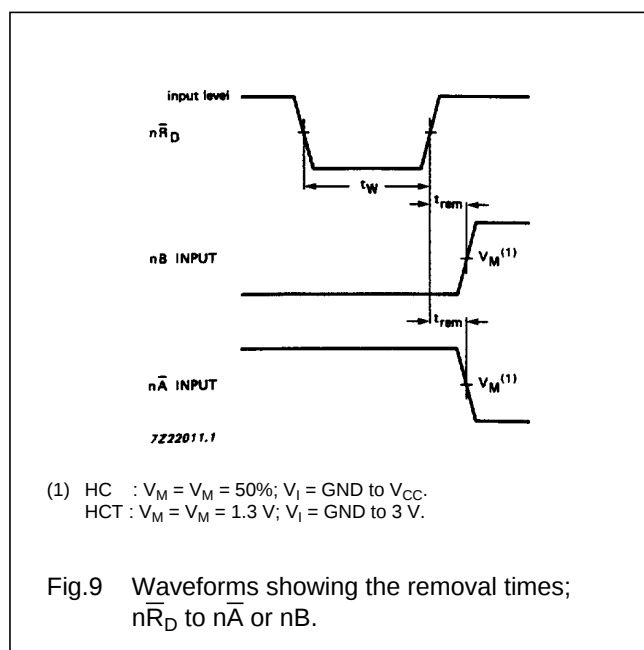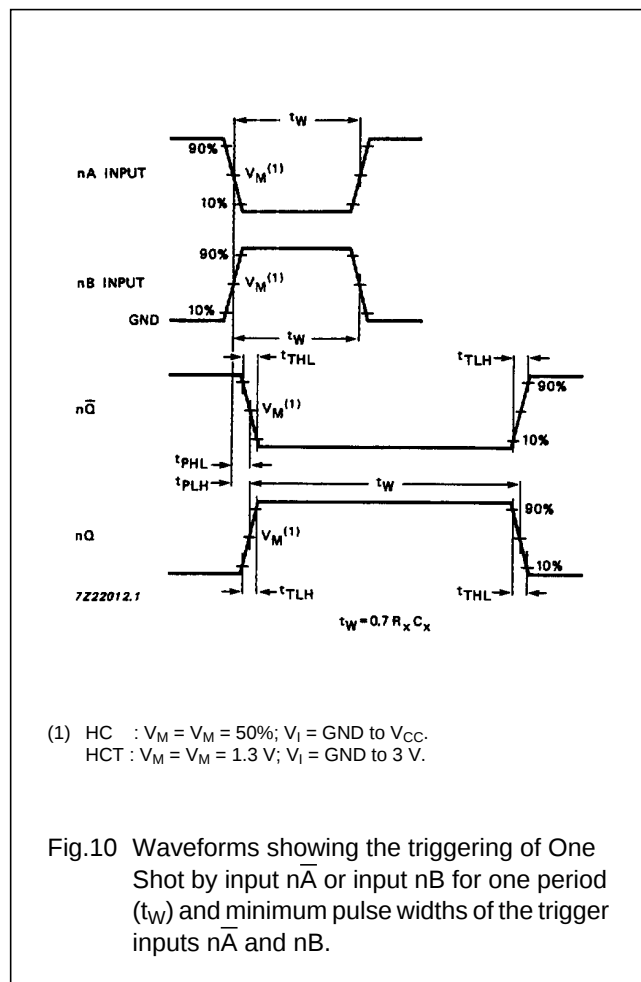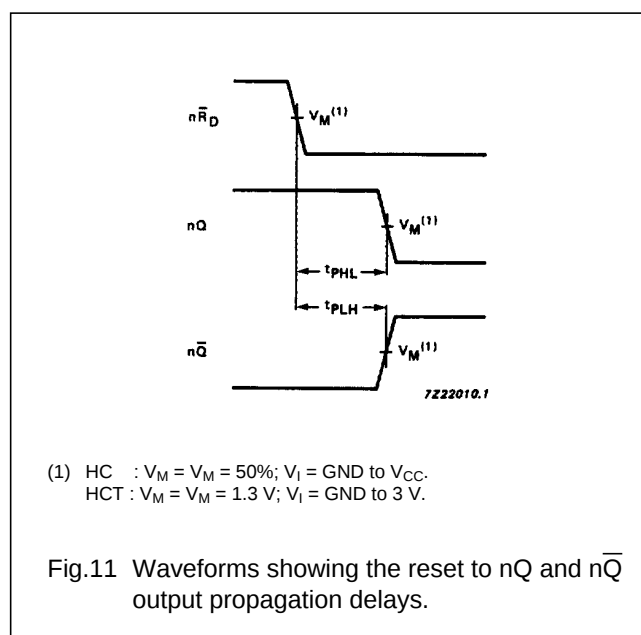Fig.7 Output pulse control;  $\overline{nR_D}$  = HIGH.Fig.8 Output pulse control using reset input  $\overline{nR_D}$ ;  $\overline{nA}$  = LOW.(1) HC :  $V_M = V_M = 50\%$ ;  $V_I$  = GND to  $V_{CC}$ .  
HCT :  $V_M = V_M = 1.3$  V;  $V_I$  = GND to 3 V.Fig.9 Waveforms showing the removal times;  $\overline{nR_D}$  to  $\overline{nA}$  or  $\overline{nB}$ .(1) HC :  $V_M = V_M = 50\%$ ;  $V_I$  = GND to  $V_{CC}$ .  
HCT :  $V_M = V_M = 1.3$  V;  $V_I$  = GND to 3 V.Fig.10 Waveforms showing the triggering of One Shot by input  $\overline{nA}$  or input  $\overline{nB}$  for one period ( $t_W$ ) and minimum pulse widths of the trigger inputs  $\overline{nA}$  and  $\overline{nB}$ .(1) HC :  $V_M = V_M = 50\%$ ;  $V_I$  = GND to  $V_{CC}$ .  
HCT :  $V_M = V_M = 1.3$  V;  $V_I$  = GND to 3 V.Fig.11 Waveforms showing the reset to  $\overline{nQ}$  and  $\overline{nQ}$  output propagation delays.


Dual non-retriggerable monostable  
multivibrator with reset

74HC/HCT221

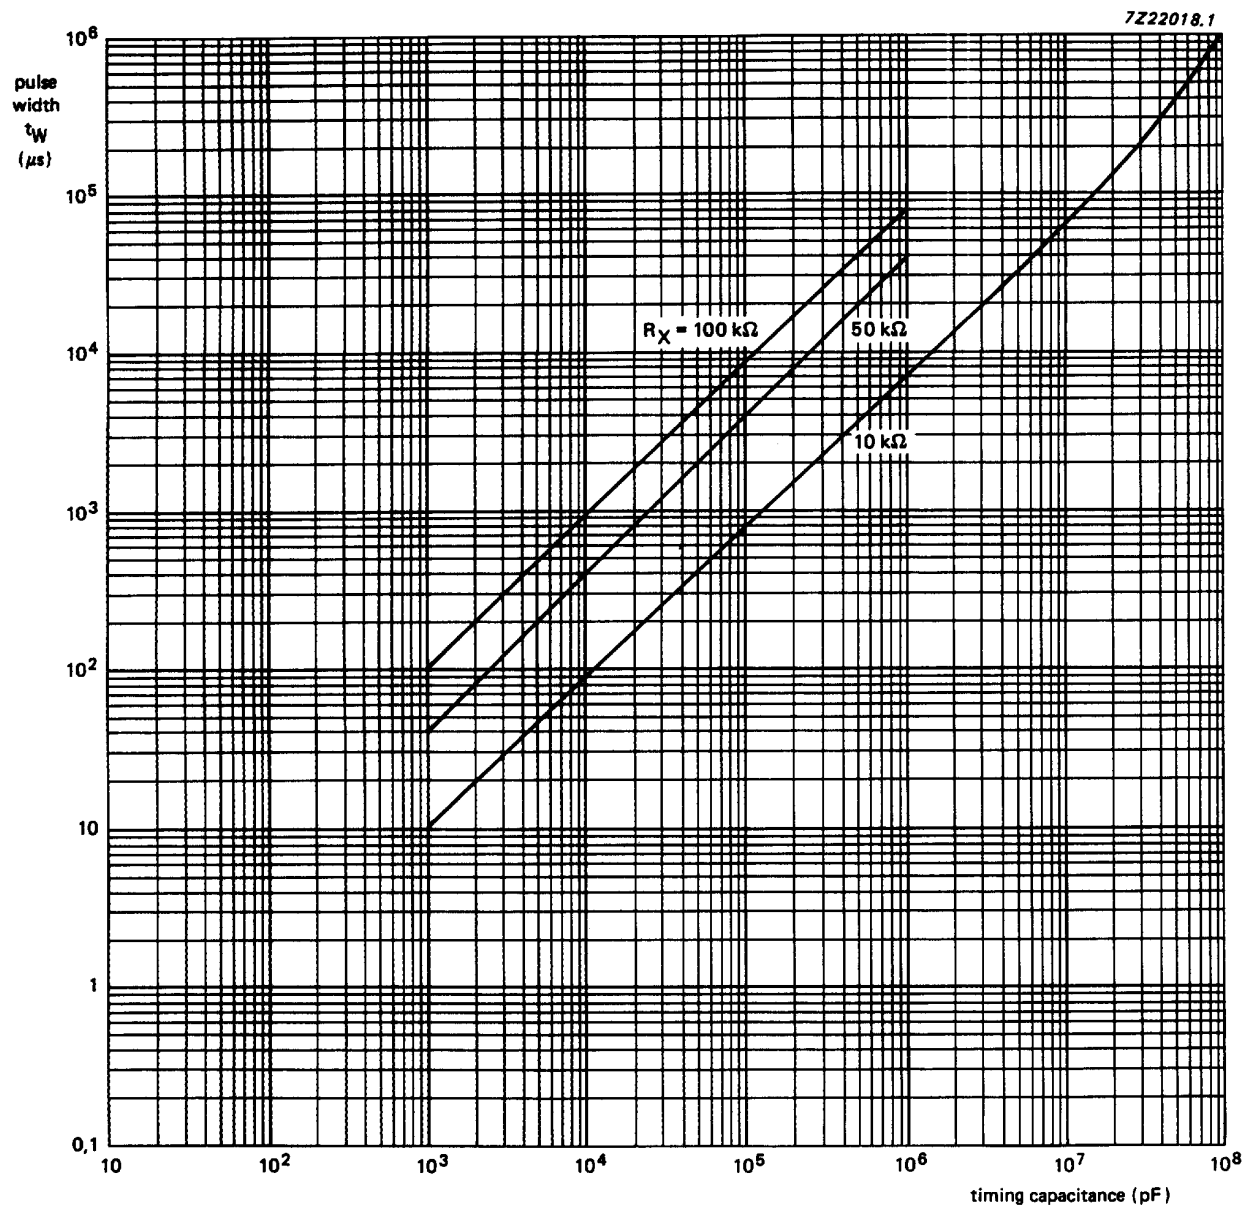Fig.12 HC typical output pulse width as a function of timing capacitance ( $V_{CC} = 2\text{ V}$ ).


Dual non-retriggerable monostable  
multivibrator with reset

74HC/HCT221

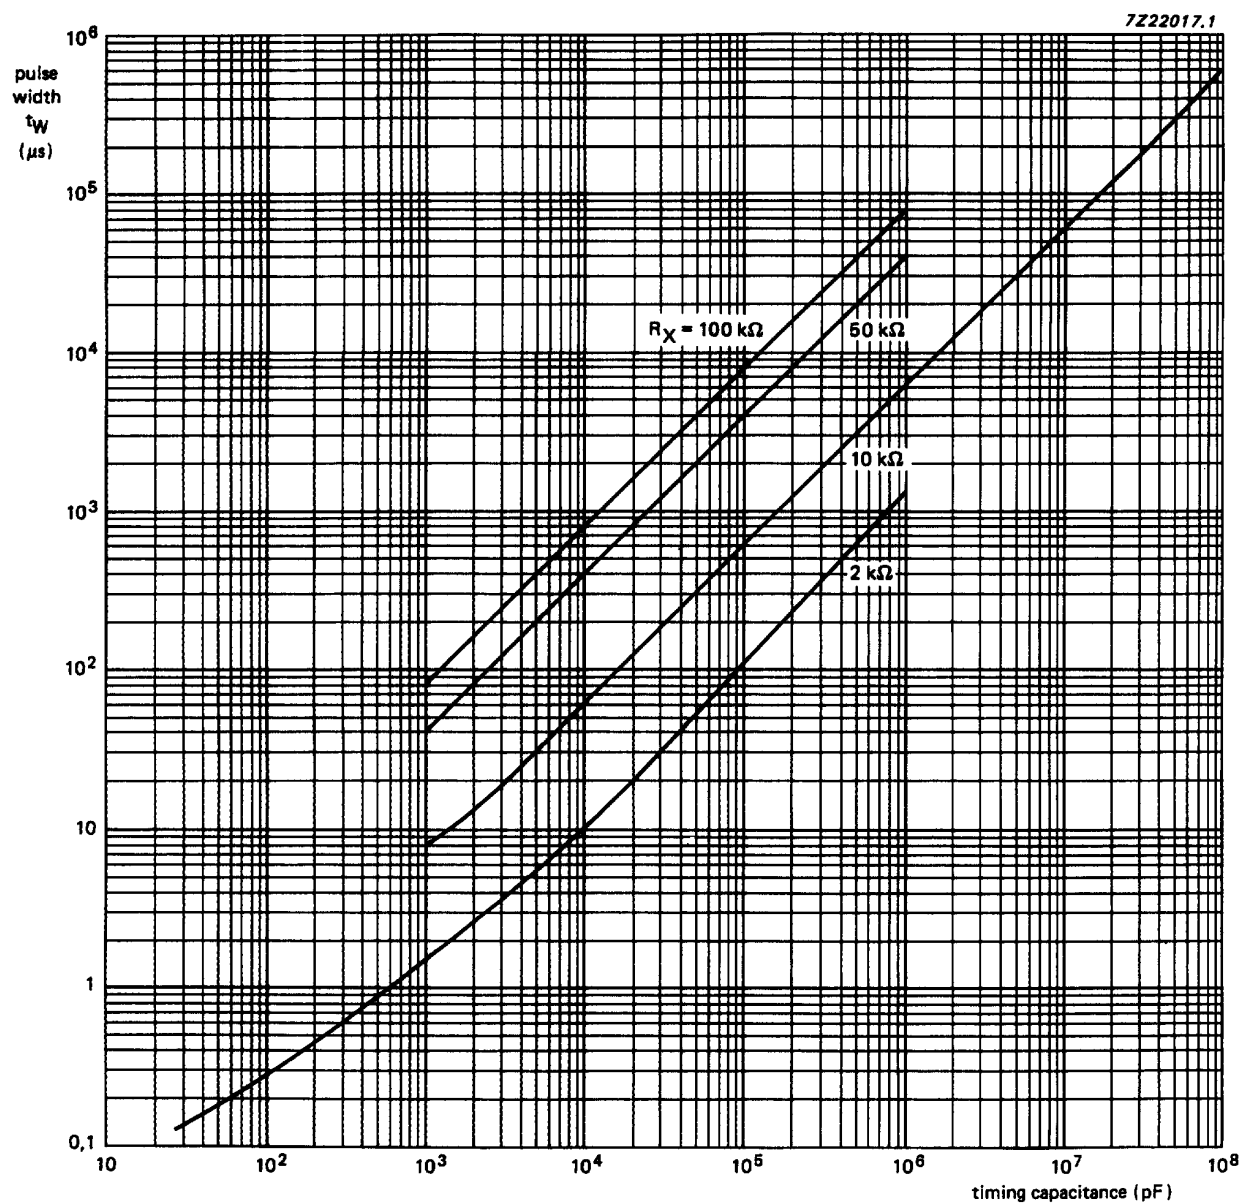Fig.13 HC/HCT typical output pulse width as a function of timing capacitance ( $V_{CC} = 4.5 V$ ).

Dual non-retriggerable monostable  
multivibrator with reset

74HC/HCT221

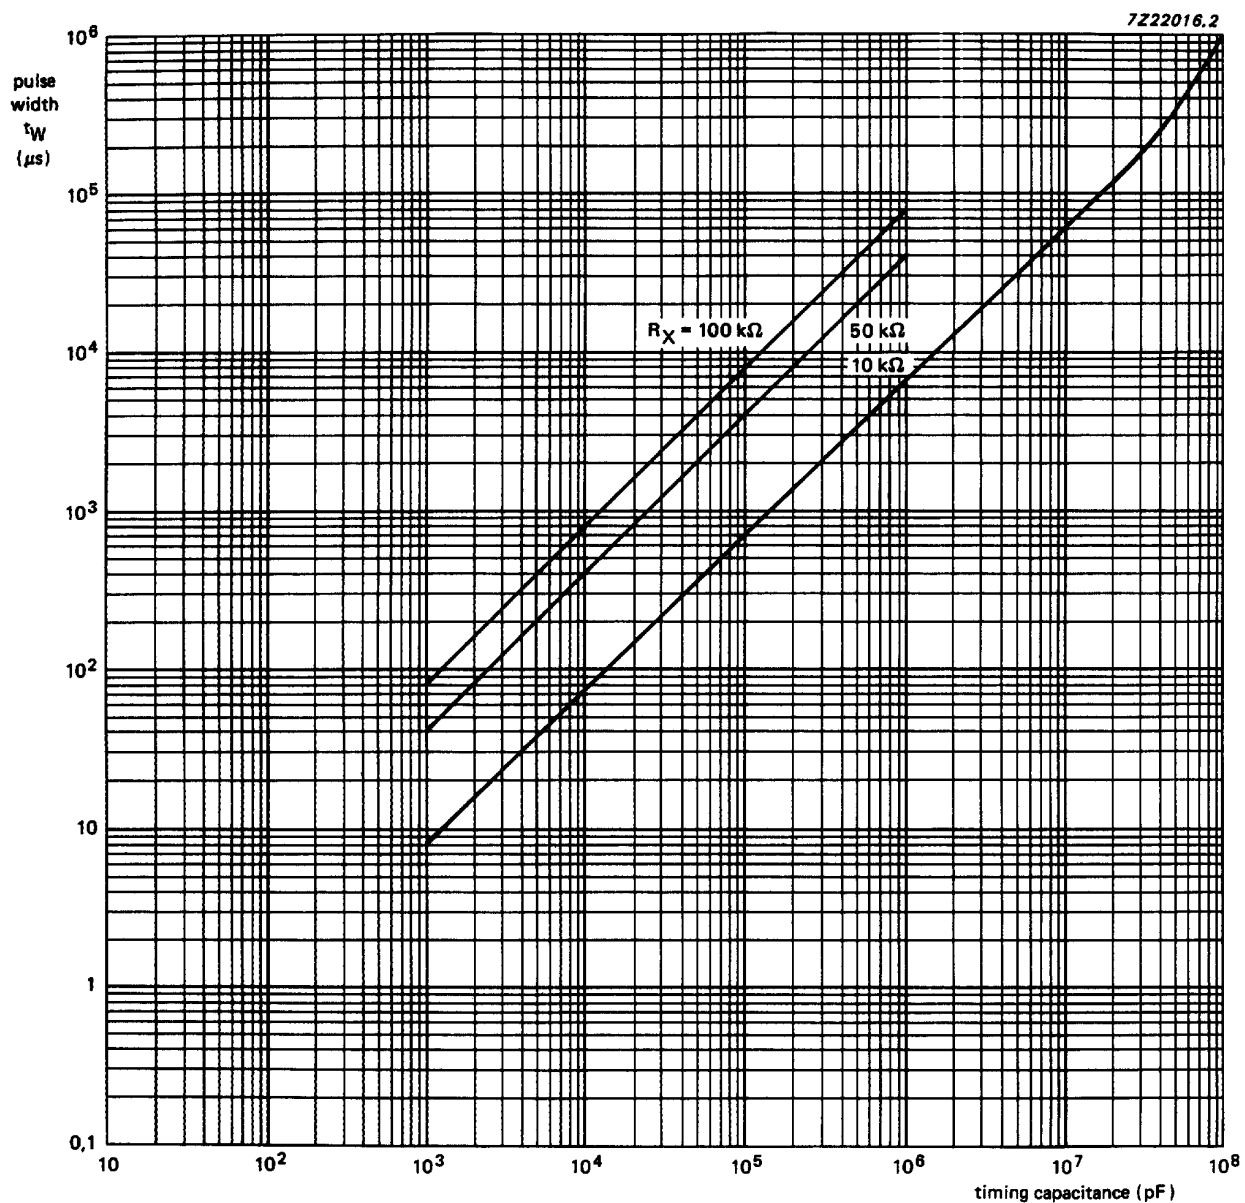Fig.14 HC typical output pulse width as a function of timing capacitance ( $V_{CC} = 6$  V).

# Dual non-retriggerable monostable multivibrator with reset

## 74HC/HCT221

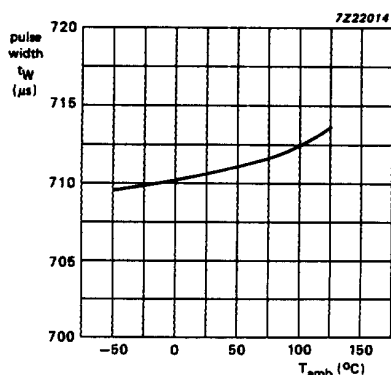


Fig.15 Typical output pulse width as a function of temperature;  $C_X = 0.1 \mu F$ ;  $R_X = 10 K\Omega$ ;  $V_{CC} = 5 V$ .

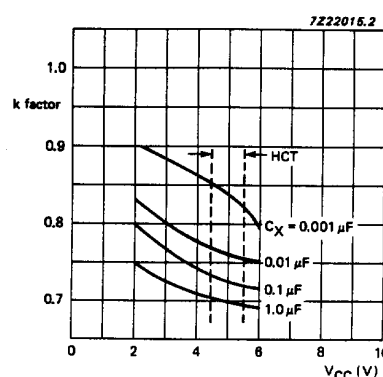


Fig.16 k factor as a function of supply voltage;  $R_X = 10 K\Omega$ ;  $T_{amb} = 25 ^{\circ}C$ .

### Power-down consideration

A large capacitor ( $C_X$ ) may cause problems when powering-down the monostable due to the energy stored in this capacitor. When a system containing this device is powered-down or a rapid decrease of  $V_{CC}$  to zero occurs, the monostable may sustain damage, due to the capacitor discharging through the input protection diodes. To avoid this possibility, use a damping diode ( $D_X$ ) preferably a germanium or Schottky type diode able to withstand large current surges and connect as shown in Fig.17.




Fig.17 Power-down protection circuit.

### PACKAGE OUTLINES

See "74HC/HCT/HCU/HCMOS Logic Package Outlines".