

Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Base element for type 2 arresters of the VALVETRAB MS product range. Version for 3-phase power supply with PEN conductor.




Why buy this product

- Versions with and without floating remote indication contact
- Single/multi-position design for accommodating protective plugs
- DIN rail module
- Coding when protective plug is inserted for the first time



Key commercial data

Packing unit	1 pc
GTIN	 4 046356 130417
Weight per Piece (excluding packing)	203.2 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Height	90 mm
Width	53.4 mm
Depth	51.5 mm
Horizontal pitch	3 Div.

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C

General

Housing material	PBT / PA
Inflammability class according to UL 94	V0
Color	black

Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Technical data

General

Mounting type	DIN rail: 35 mm
Type	DIN rail module, two-section, divisible
Number of positions	3
Direction of action	3L-PEN

Protective circuit

Nominal voltage U_N	400 V AC (690 V AC)
	≤ 500 V (IT system)
Maximum continuous operating voltage U_C	1000 V AC
Rated load current I_L	80 A (Serial through wiring at 16 mm ²)
Max. required backup fuse with branch wiring	200 A (gL / gG)
Max. required backup fuse with V-type through wiring	80 A (gL / gG)
Short-circuit resistance I_P with max. backup fuse (effective)	25 kA

Connection, protective circuit

Connection method	Screw connection
Connection type IN	Biconnect screw terminal block
Connection type OUT	Biconnect screw terminal block
Connection method	Biconnect terminal block
Screw thread	M5
Tightening torque	4.5 Nm
Stripping length	16 mm
Conductor cross section stranded min.	1.5 mm ²
Conductor cross section stranded max.	25 mm ²
Conductor cross section solid min.	1.5 mm ²
Conductor cross section solid max.	35 mm ²
Conductor cross section AWG/kcmil min.	15
Conductor cross section AWG/kcmil max	2

Standards and Regulations

Standards/regulations	IEC 61643-1 2005
	EN 61643-11/A11 2007

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130805
eCl@ss 7.0	27130805

Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Classifications

eCl@ss

eCl@ss 8.0	27130805
------------	----------

ETIM

ETIM 2.0	EC000941
ETIM 3.0	EC000941
ETIM 4.0	EC000472
ETIM 5.0	EC000472

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals


Approvals

ÖVE / CCA / IEC EE CB Scheme / UL Recognized / KEMA-KEUR / cUL Recognized / GOST / GL / ÖVE / CCA / IEC EE CB Scheme / KEMA-KEUR / CSA / cULus Recognized

Ex Approvals


Approvals submitted

Approval details



Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Approvals

UL Recognized 

KEMA-KEUR 

cUL Recognized 

GOST 

GL

ÖVE 

CCA

IECEE CB Scheme 

KEMA-KEUR 

CSA

cULus Recognized 

Accessories

Accessories

Bridge

Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Accessories

Wiring bridge - MPB 18/3- 6 - 2809241



Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 6-pos.

Wiring bridge - MPB 18/3- 9 - 2809254



Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 9-pos.

Wiring bridge - MPB F200X16/ 1GS - 2818339



Wiring bridge flexible, diameter 16 mm², with a fork-type cable lug on one side, length: 200 mm

Wiring bridge - MPB F400X16/ 1GS - 2818342



Wiring bridge flexible, diameter 16 mm², with a fork-type cable lug on one side, length: 400 mm

Wiring bridge - MPB F600X16/ 1GS - 2818355



Wiring bridge flexible, diameter: 16 mm², with a fork-type cable lug on one side, length: 600 mm

Device marking

Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Accessories

Zack marker strip - ZBN 18:UNBEDRUCKT - 2809128



Zack marker strip, Strip, white, Unlabeled, Can be labeled with: Plotter, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Feed-through terminal block

Feed-through terminal block - DK-BIC-35 - 2749880



Feed-through terminal block for VAL and FLT applications

Labeled device marker

Marker for terminal blocks - ZBN 18,LGS:ERDE - 2749589



Marker for terminal blocks, Strip, white, labeled, Horizontal: Grounding symbol, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Marker for terminal blocks - ZBN 18,LGS:L1-N,ERDE - 2749576



Marker for terminal blocks, Strip, white, labeled, Horizontal: L1, L2, L3, N, GND, Mounting type: Snap into tall marker groove, For terminal block width: 18 mm, Lettering field: 18 x 5 mm

Marker pen

Marker pen - B-STIFT - 1051993




Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Drawings

Type 2 surge protection base element - VAL-MS/3+0-BE - 2881816

Dimensioned drawing

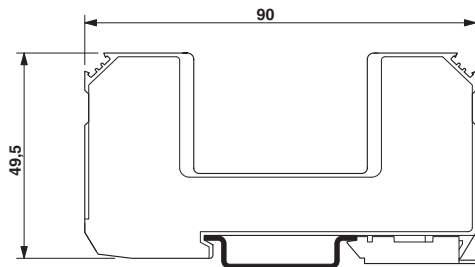

Circuit diagram

