
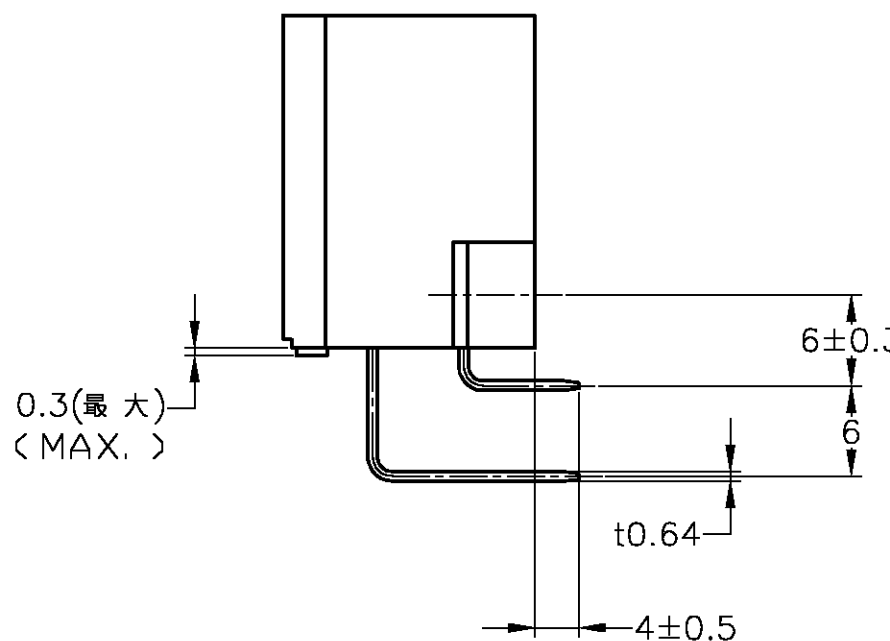
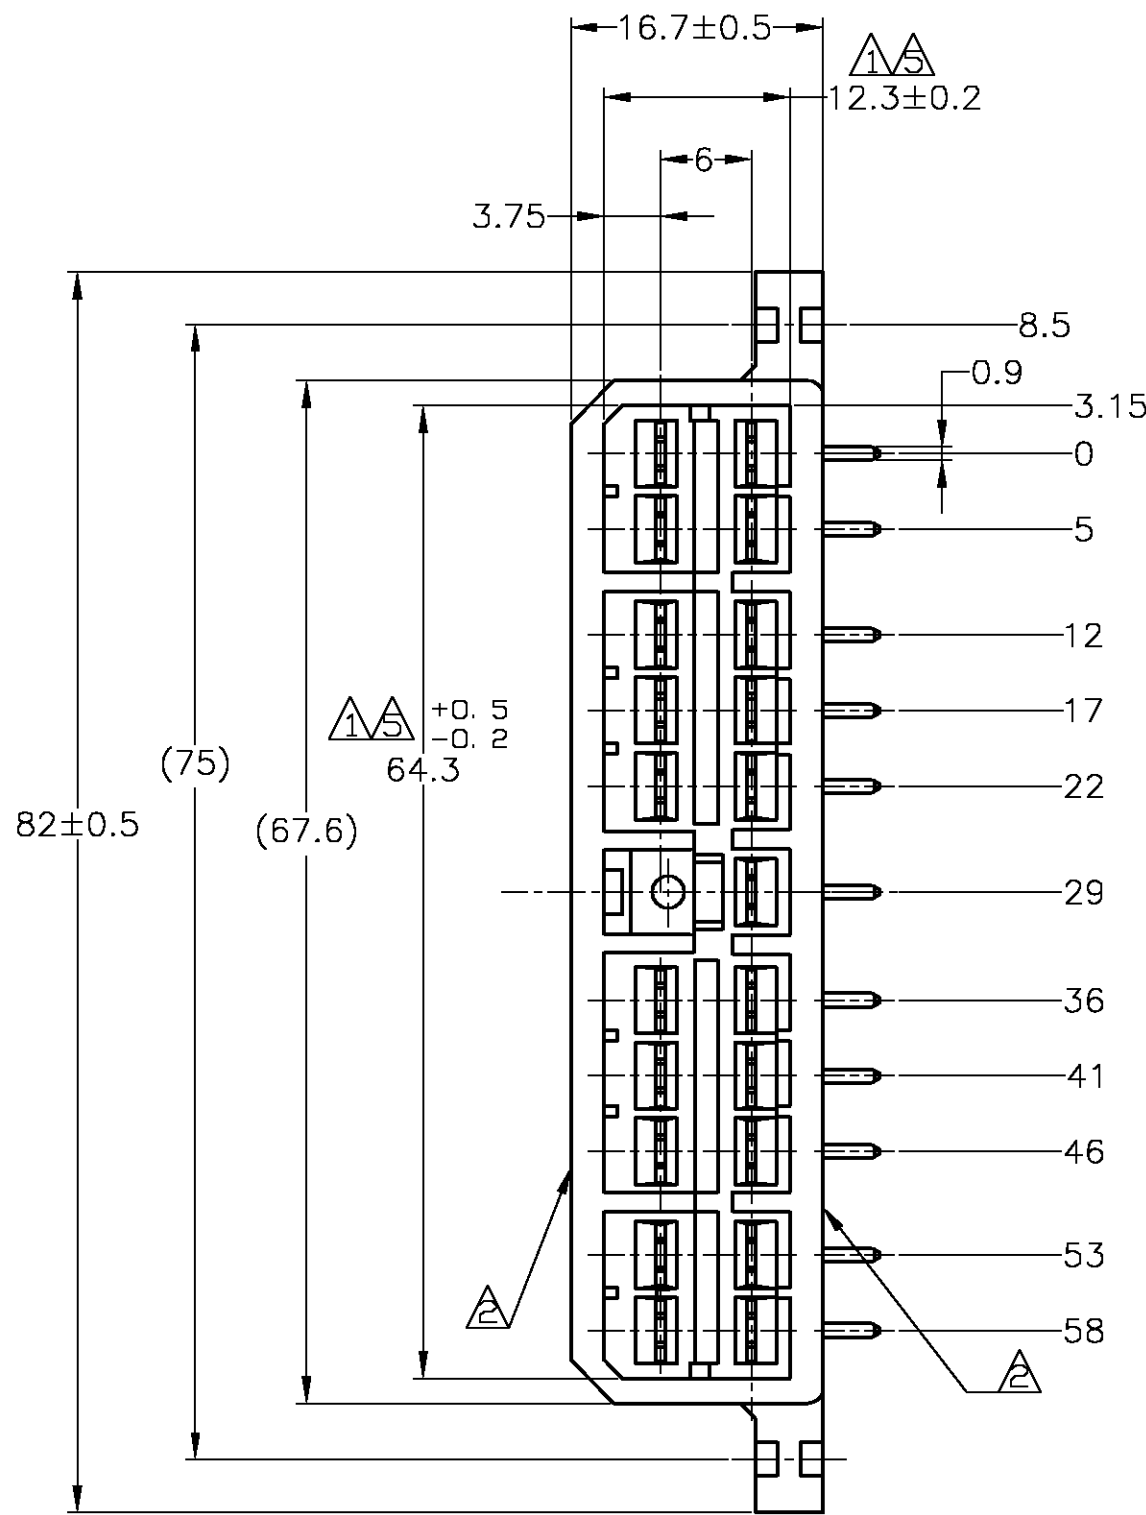


D

C


B

A

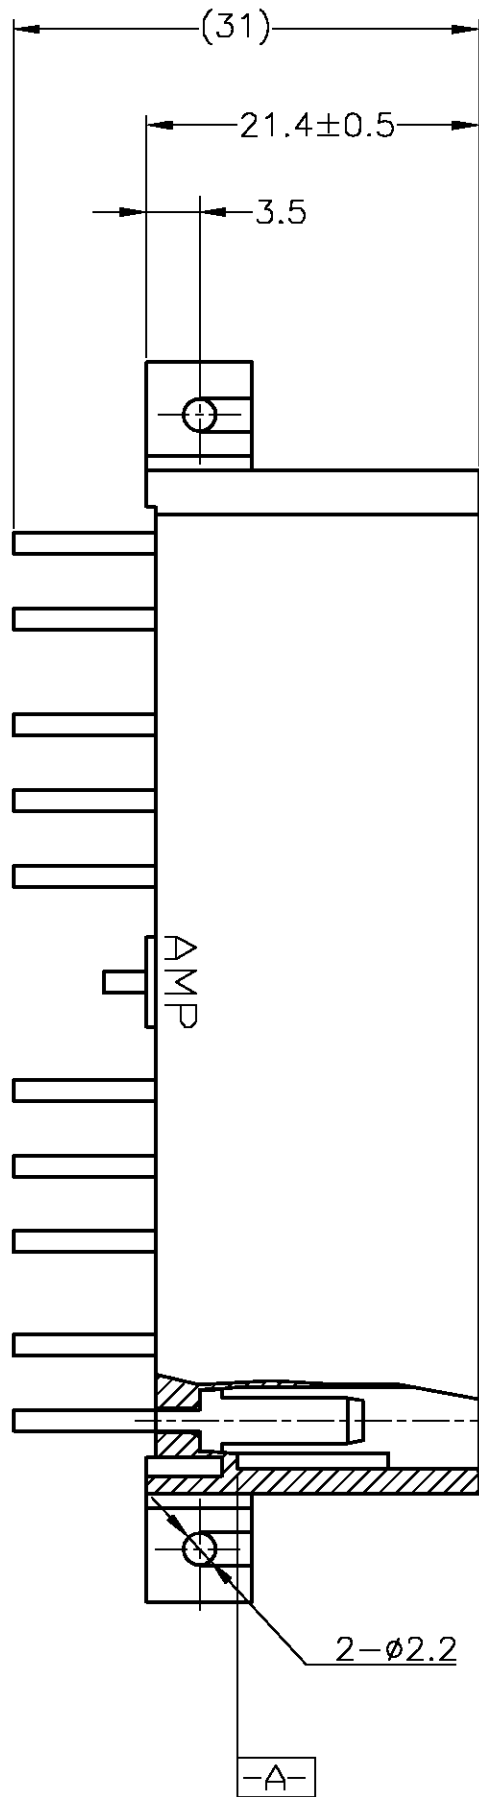

プリント基板取付穴寸法図
(MOUNTING DIMENSIONS FOR P.C.BOARD)


1. 板厚, 1.6±0.15
(P.C.B. THICKNESS, 1.6±0.15)
2. 公差, ±0.1
(TOLERANCE, ±0.1)

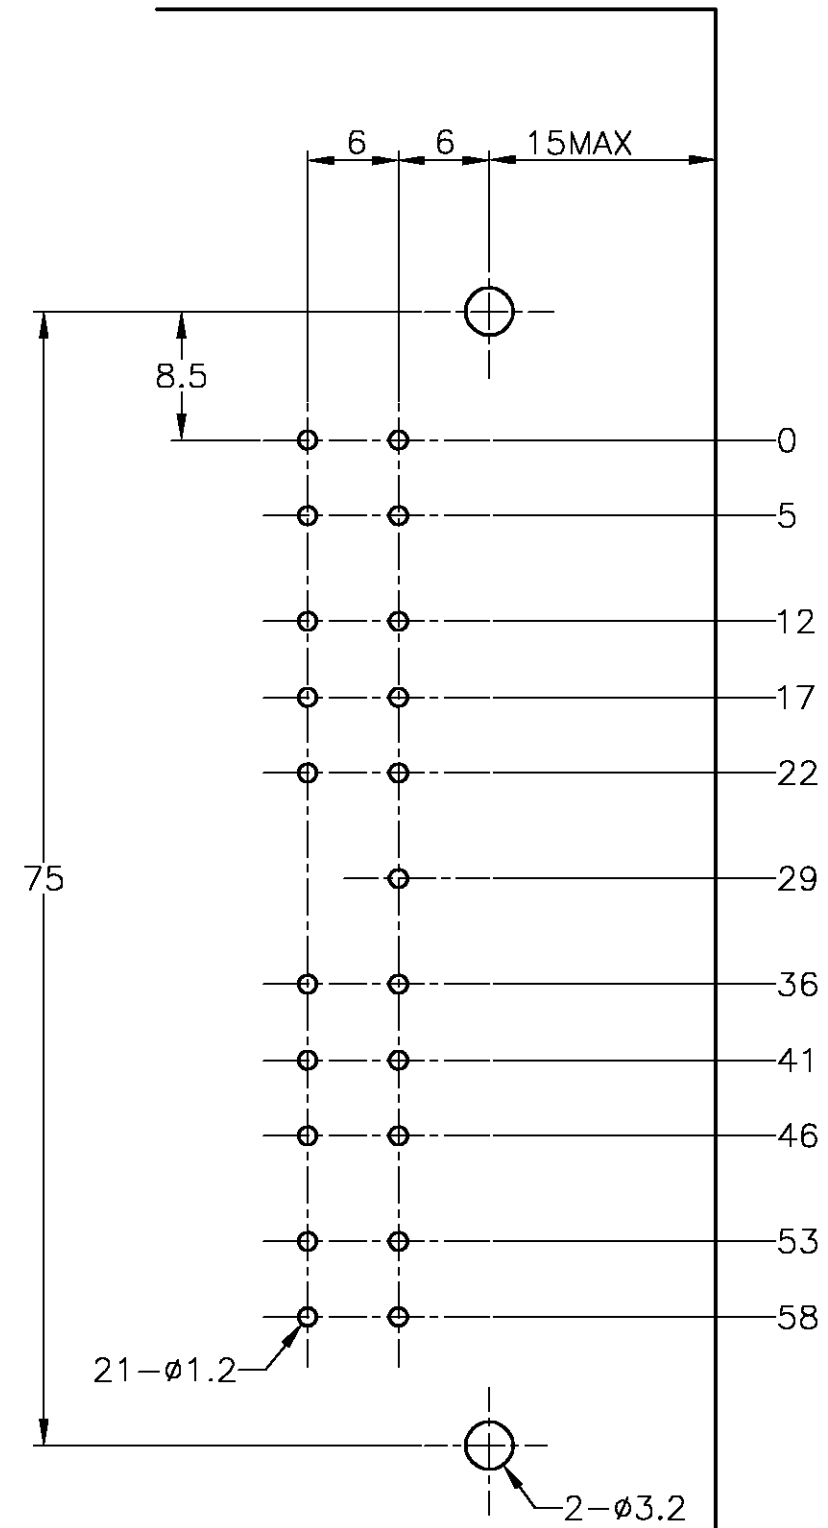

- 注記:
△ 相手ハウジングと所定の機能を満たしてかん合できること。
△ フードの反りは0.2以内。
3 プリント基板への取付けは JIS B1115 M3 1種の
タッピンネジで締め付けた後はんだ付けする。
4 適用製品規格: 108-5093
△ -A- 面より2mmの範囲で測定のこと。
6 相手ハウジングとのかん合力は、29.4N以下
但し、リセプタクルコンタクトは含まない。
△ 金めっき位置番号: 下図参照のこと (回路番号ではありません)

- NOTE:
△ IN COUPLING WITH THE PLUG HOUSING MATING SATISFIES FUNCTION
△ WARPAGE 0.2 MAX.
3 SOLDERING AFTER MOUNTING P. C. BOARD BY 3mmDIA TAPPING SCREW,
SPECIFIED IN JIS B1115
4 PRODUCT SPEC NO. 108-5093
△ TO BE MEASURED WITHIN 2mm FROM -A-
6 IN COUPLING WITH THE PLUG HOUSING MATING FORCE 29.4N MAX.
WITHOUT RECEPTACLE CONTACT

△ GOLD PLATED POSITION NUMBER. (NOT CIRCUIT NUMBER)

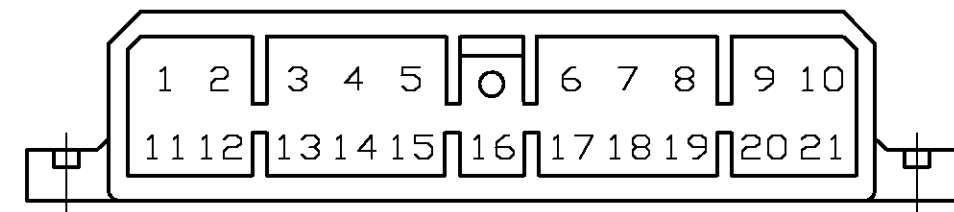

	①~②	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD (0.38μm MIN.)	NATURAL	3-5171367-1
	①~②	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD (0.76μm MIN.)	NATURAL	2-5171367-1
	⑥ ⑨ ⑩ ⑪ ⑫	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	NATURAL	4-171367-1
OBSOLETE	①~⑩ ⑪ ⑫	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	GREEN	3-171367-4
OBSOLETE	①~⑩ ⑪ ⑫	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	NATURAL	3-171367-1
	①~⑩ ⑪ ⑫	TIN-LEAD	SELECTIVE GOLD (0.76μm MIN.)	GREEN	2-171367-4
	①~⑩ ⑪ ⑫	TIN-LEAD	SELECTIVE GOLD (0.76μm MIN.)	NATURAL	2-171367-1
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	YELLOW	1-171367-7
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	GRAY	1-171367-6
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	BLUE	1-171367-5
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	GREEN	1-171367-4
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	BROWN	1-171367-3
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	BLACK	1-171367-2
	③ ⑨ ⑬ ⑮	TIN-LEAD	SELECTIVE GOLD (0.38μm MIN.)	NATURAL	1-171367-1
	—/—	PRE-TIN	PRE-TIN	GRAY	171367-6
	—/—	PRE-TIN	PRE-TIN	BLUE	171367-5
	—/—	PRE-TIN	PRE-TIN	GREEN	171367-4
	—/—	PRE-TIN	PRE-TIN	BROWN	171367-3
	—/—	PRE-TIN	PRE-TIN	BLACK	171367-2
	—/—	PRE-TIN	PRE-TIN	NATURAL	171367-1
GOLD PL. POSITION No. 金めっき位置番号	SOLDERING SIDE 半田付け部	CONTACT SIDE 接触部側	COLOR 色	PART NUMBER 製品型番	

TOLERANCE UNLESS OTHERWISE SPECIFIED: — 公差	0 ~ < 10 : ±0.2 10 ~ < 30 : ±0.25 30 ~ < 100 : ±0.3 ANGLE : ±3°
--	--

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 寸
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
— 公差

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
5 PLC ±
6 PLC ±
7 PLC ±
8 PLC ±
9 PLC ±
10 PLC ±
11 PLC ±
12 PLC ±
13 PLC ±
14 PLC ±
15 PLC ±
16 PLC ±
17 PLC ±
18 PLC ±
19 PLC ±
20 PLC ±
21 PLC ±
22 PLC ±
23 PLC ±
24 PLC ±
25 PLC ±
26 PLC ±
27 PLC ±
28 PLC ±
29 PLC ±
30 PLC ±
31 PLC ±
32 PLC ±
33 PLC ±
34 PLC ±
35 PLC ±
36 PLC ±
37 PLC ±
38 PLC ±
39 PLC ±
40 PLC ±
41 PLC ±
42 PLC ±
43 PLC ±
44 PLC ±
45 PLC ±
46 PLC ±
47 PLC ±
48 PLC ±
49 PLC ±
50 PLC ±
51 PLC ±
52 PLC ±
53 PLC ±
54 PLC ±
55 PLC ±
56 PLC ±
57 PLC ±
58 PLC ±
59 PLC ±
60 PLC ±
61 PLC ±
62 PLC ±
63 PLC ±
64 PLC ±
65 PLC ±
66 PLC ±
67 PLC ±
68 PLC ±
69 PLC ±
70 PLC ±
71 PLC ±
72 PLC ±
73 PLC ±
74 PLC ±
75 PLC ±
76 PLC ±
77 PLC ±
78 PLC ±
79 PLC ±
80 PLC ±
81 PLC ±
82 PLC ±
83 PLC ±
84 PLC ±
85 PLC ±
86 PLC ±
87 PLC ±
88 PLC ±
89 PLC ±
90 PLC ±
91 PLC ±
92 PLC ±
93 PLC ±
94 PLC ±
95 PLC ±
96 PLC ±
97 PLC ±
98 PLC ±
99 PLC ±
100 PLC ±

DRAWING NO.
31AUG07

NAME
T. SHINOHARA

DATE
31AUG07

DESIGNED BY
K. BETSUI

DATE
31AUG07

PRODUCT SPEC
SEE NOTE 4

APPLICATION SPEC
取付適用規格

SIZE
A1

PAGE CODE
00779

DRAWING NO.
171367

RESTRICTED TO
—

CUSTOMER DRAWING

SCALE
2:1

SHEET
1 OF 1

REV
K3

Tyco Electronics Corporation
Kawasaki, Japan

21P HORIZONTAL TYPE CAP HOUSING
MULTI-INTERLOCK CONN.
WIRE TO PCB