



Features and Benefits

The MOD-SNAP modular system provides a flexible and versatile method of installation, allowing the user the choice of installing as many data outlets as required. The modules are fully assembled units featuring the Molex Premise Networks low profile Cat 5E RJLP connector and a 25 x 38.5mm fascia (BT 6C size), shutter and spring assembly.

Molex Premise Networks unique patented RJLP RJ45 connector is engineered to meet the highest performance standards in the industry and offers a low profile, space saving design that enables installation in shallow backboxes and trunking.

Suitable for high speed data transmission the PowerCat RJLP RJ45 connector was designed to meet the requirement of the Cat 5E standard which demands compliance with the PowerSum principle of measurement and test.

- RJ45 RJLP connector Category 5E
- EIA 568B wired
- Space saving low profile module
- Labelling facility

Technical Information

Termination Tools:

Molex and other industry standard installation tools

IDC Terminations

Suitable for 0.4mm - 0.6mm solid or stranded cable, maximum o.d 1.5mm
Two wires may be terminated for daisy-chain applications.
Patents pending on connector and module designs.

Mechanical Jack Connector

Operating Life : Minimum 500 insertion cycles
Contact Material : Phosphor Bronze
Contact Plating : 1.25 micrometres Au/Ni
Material : UL 94V0 Thermoplastic

IDC Connector

Operating Life : Minimum 100 Reterminations
Contact Material : Phosphor Bronze
Contact Plating : Sn/Pb over Ni
Wire Accommodation: 2 x 22-26 AWG solid or stranded

Electrical


D.C. Resistance : <20mΩ
D.C. Resistance Imbalance : <2.0mΩ
Insulation Resistance : >100MΩ
Attenuation (dB) @ 1MHz 0.0121
@ 16MHz 0.0193
@ 100MHz 0.1052
Crosstalk (dB) @ 1MHz -84.26
@ 16MHz -60.03
@ 100MHz -45.70
PowerSum Worst Pair @ 100MHz -41.83
Return Loss (dB) @ 1MHz -65
@ 16MHz -48
@ 100MHz -30

Backbox/Trunking depth requirement


Minimum clearance 16mm

Shipping Weight

Box 20 = 0.25 Kg

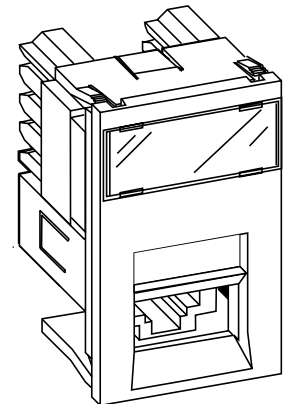

Cut out size: 37 x 22mm

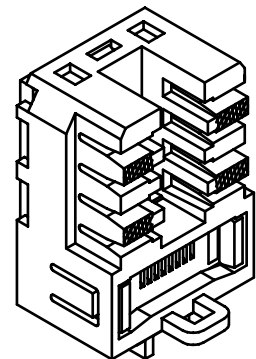

Order No.	Description
42.1B.011.A0032*	Powercat Mod-Snap RJLP module. RJ45, 568B, Category 5E (White)

Molex Premise Networks standard fascia colour is white. Other colours may be subject to minimum order quantities.

MOLEX PREMISE NETWORKS

Molex Premise Networks
Corporate Headquarters
Tel: 603 324 0200
www.molexpn.com

Western Europe
Headquarters
Tel: 44 (0) 1489 572111
www.molexpn.co.uk

Eastern Europe
Headquarters
Tel: 48 22 36 92 51
www.molexpn.com.pl

Asia Headquarters
Tel: 852 2637 3759
www.molexpn.com.hk

South Pacific
Headquarters
Tel: 61 3 9747 8322
www.molexpn.com.au

Molex Incorporated
Tel: 630 969 4550
www.molex.com