

**Ordering number C10859_CINDY-S**

Family	Cindy	FWHM	22 degrees
Type	Reflector	Efficiency	90 %
LED	CL-L251	cd/Im	2.400
Color	Metal	Gerber File	Available
Diameter	22.6 mm		
Height	12.5 mm		
Style	Hexag		
Optic Material	-		
Holder Material	PC		
Fastening	Glue		
Status	Ready		

**Ordering number C10980_CINDY-M**

Family	Cindy	FWHM	34 degrees
Type	Reflector	Efficiency	87 %
LED	CL-L251	cd/Im	2.000
Color	Metal	Gerber File	Available
Diameter	22.6 mm		
Height	12.5 mm		
Style	Hexag		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**Ordering number C10981_CINDY-W**

Family	Cindy	FWHM	52 degrees
Type	Reflector	Efficiency	86 %
LED	CL-L251	cd/Im	1.300
Color	Metal	Gerber File	Available
Diameter	22.6 mm		
Height	12.5 mm		
Style	Hexag		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET

Cindy series

last update 22/5/2012

CITIZEN

GENERAL INFORMATION


- Product series especially designed & optimized for CL-L251 series of LEDs.
 - Special care taken to make light distribution as uniform as possible.
 - Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).
 - Optic holder molded by high quality PC material (120 dergees of Celcius / 248 degrees of Fahrenheit).
- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.
http://www.ledil.com/datasheets/DataSheet_GLUES.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the glue.

NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.

Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

Relative Intensity of C10981_Cindy-L251-W

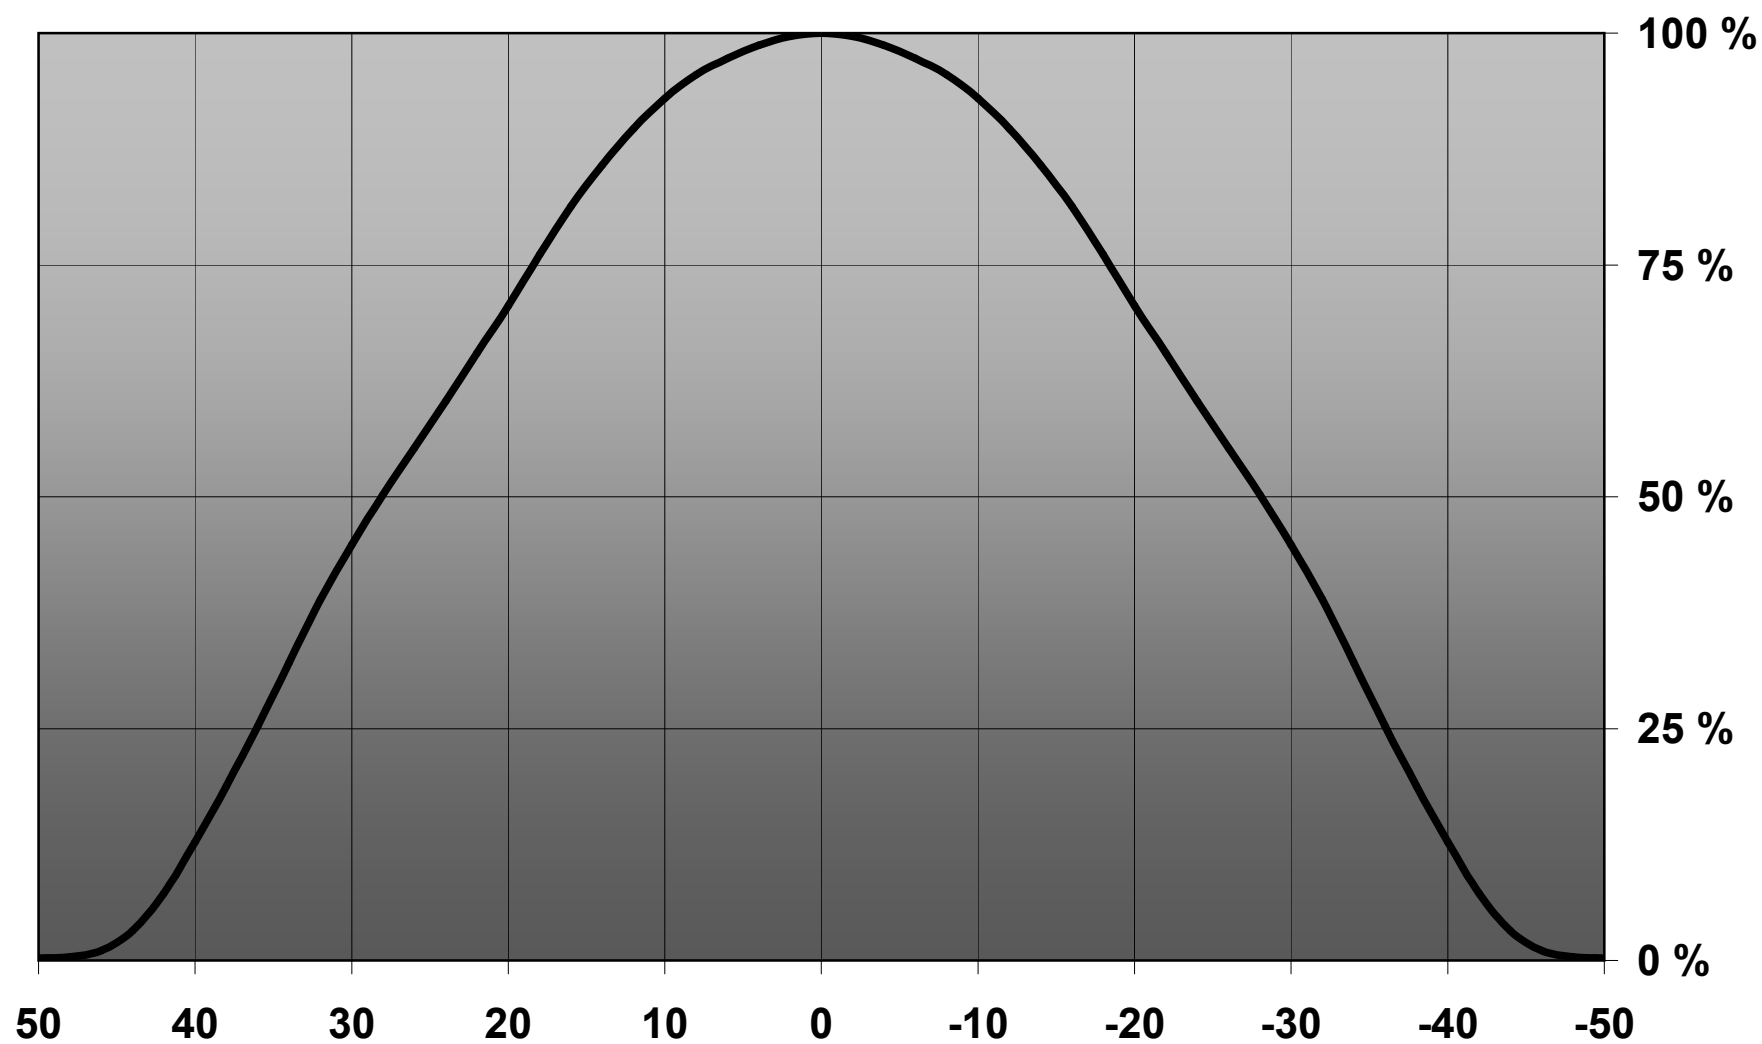

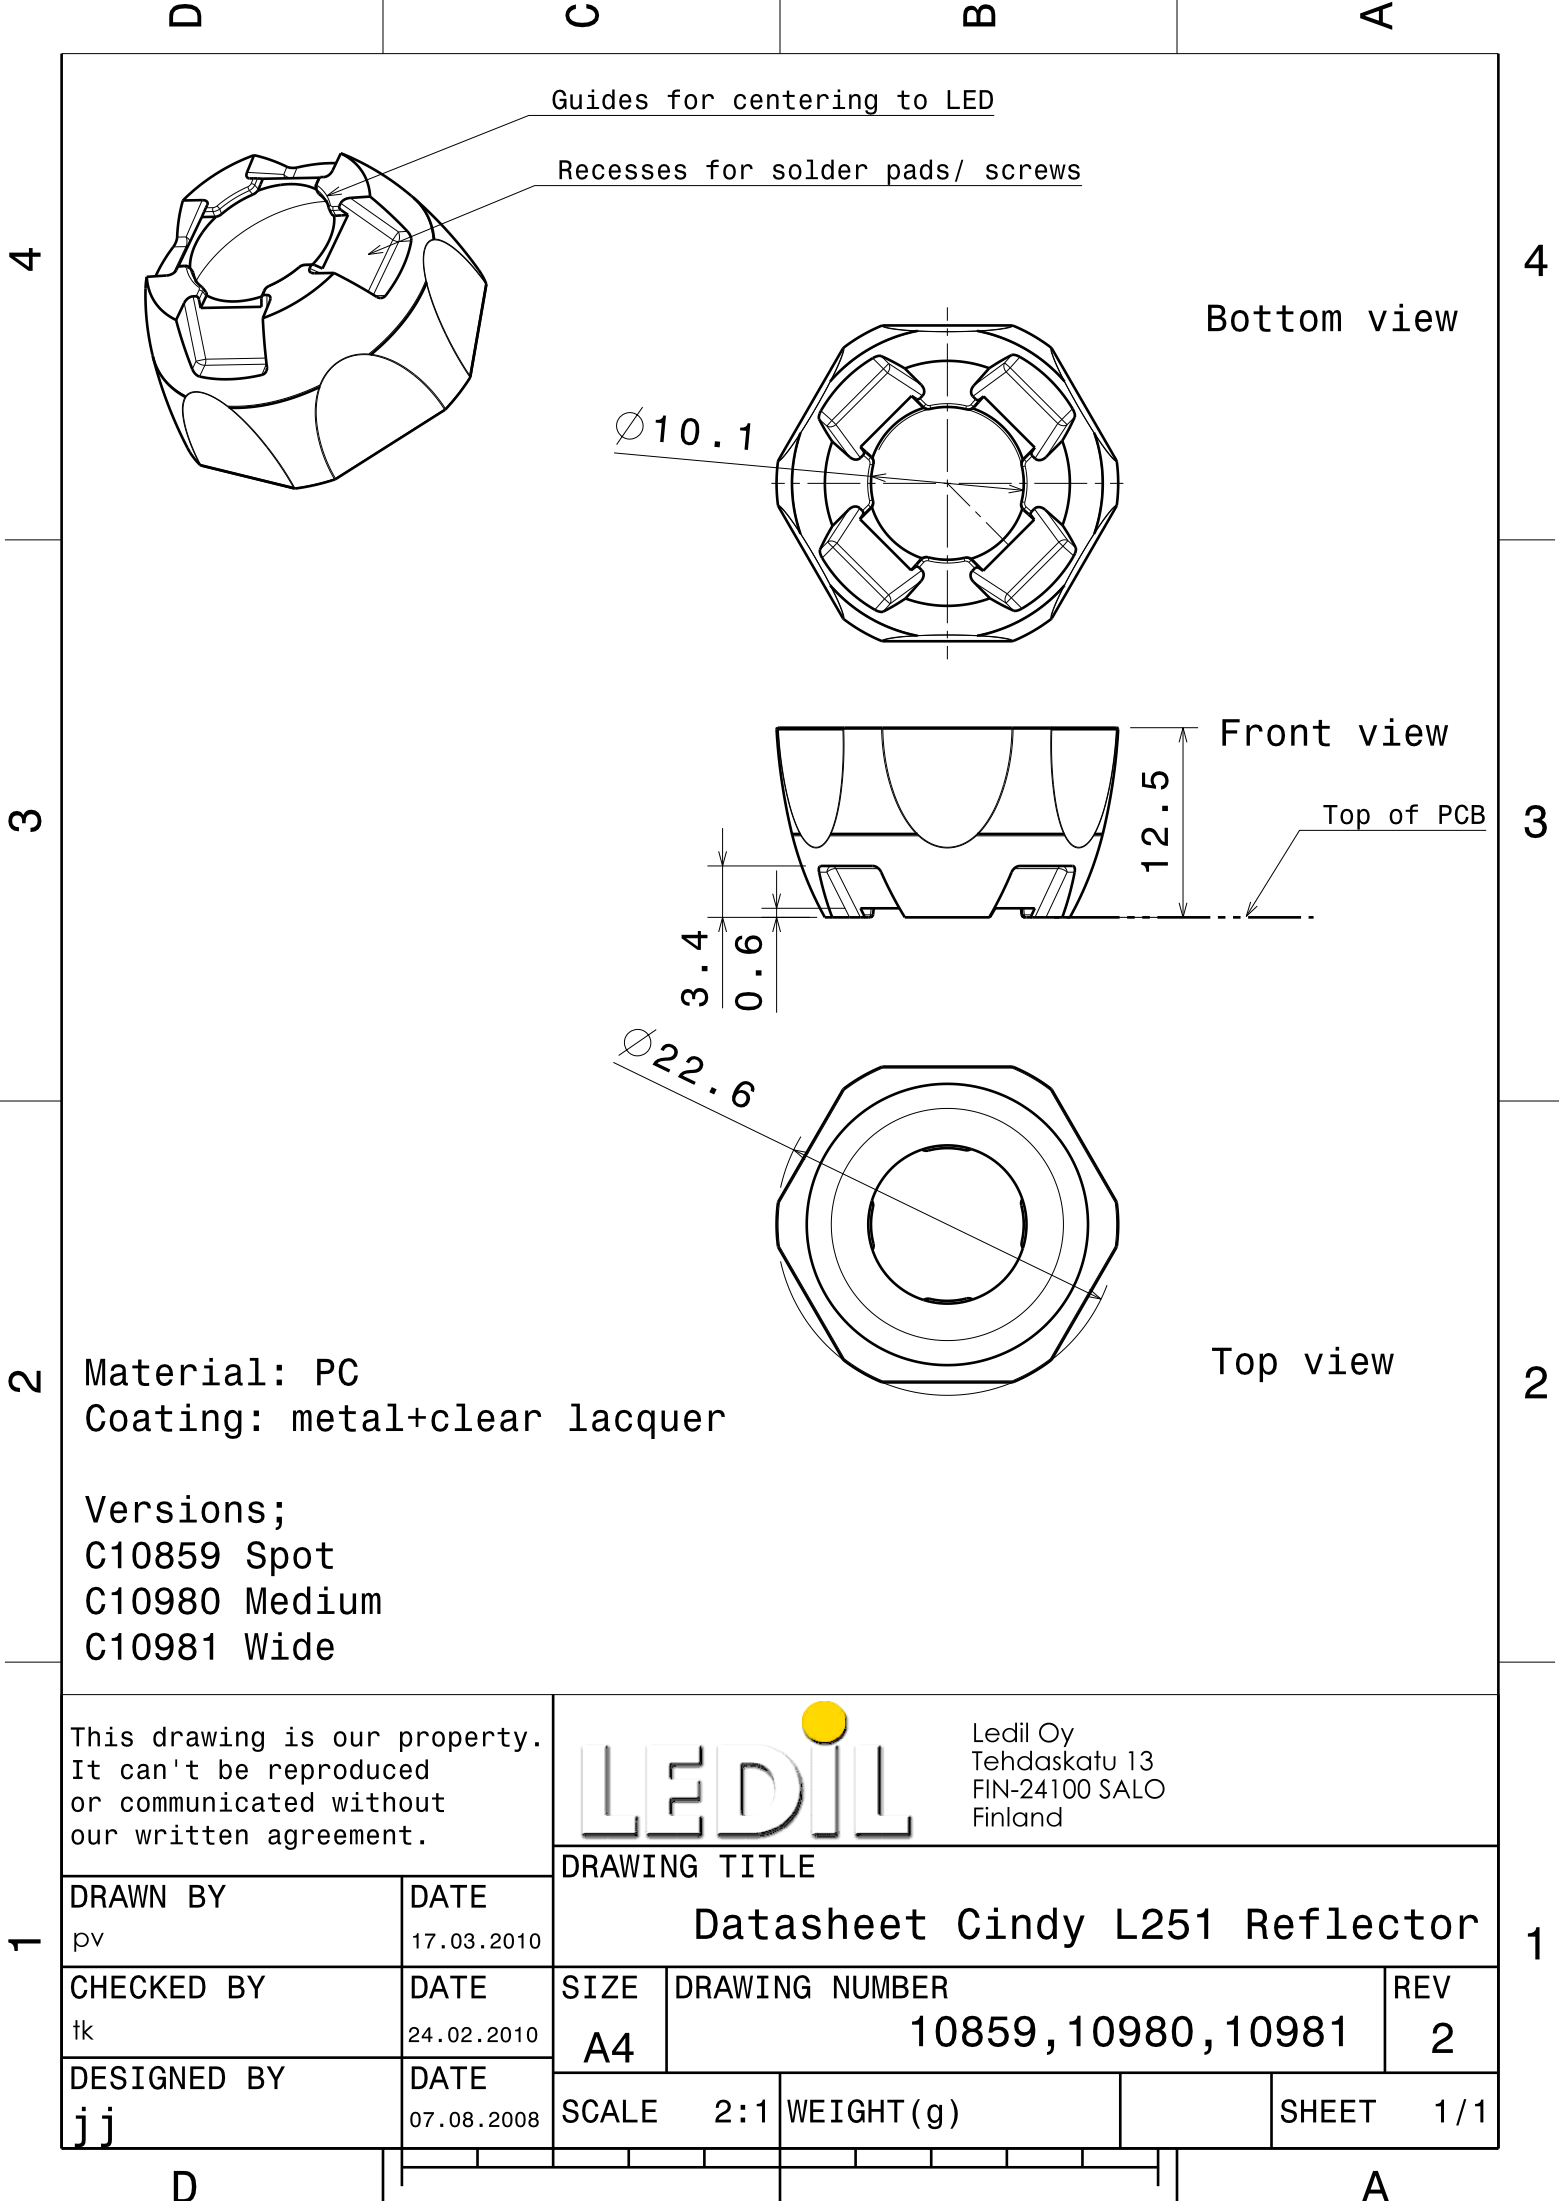

Material: PC
Coating: metal+clear lacquer

Versions;
C10859 Spot
C10980 Medium
C10981 Wide

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



Ledil Oy
Tehdaskatu 13
FIN-24100 SALO
Finland

DRAWING TITLE

Datasheet Cindy L251 Reflector

DRAWN BY pv	DATE 17.03.2010
CHECKED BY tk	DATE 24.02.2010
DESIGNED BY jj	DATE 07.08.2008

SIZE A4	DRAWING NUMBER 10859, 10980, 10981	REV 2
SCALE 2:1	WEIGHT (g)	SHEET 1 / 1