
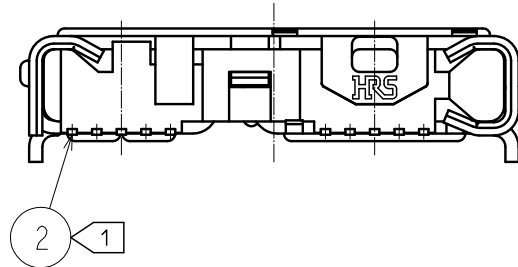
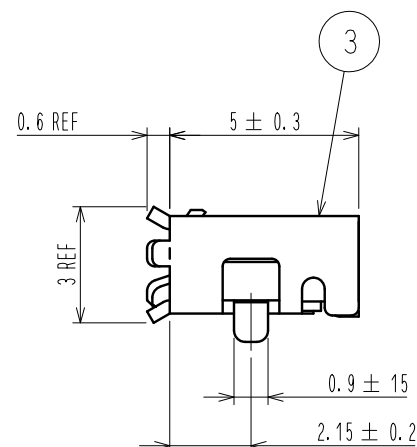
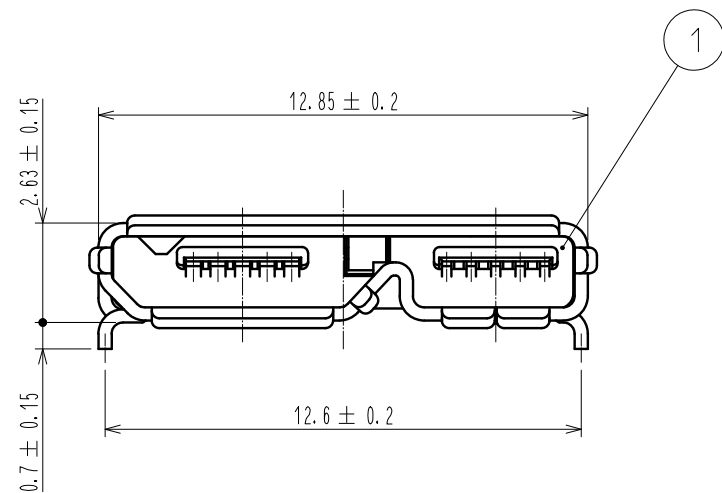
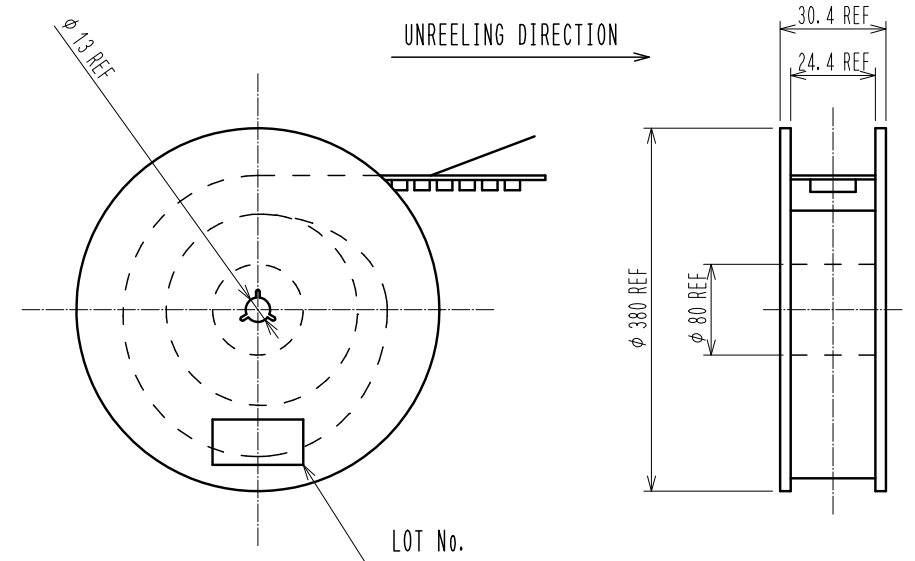
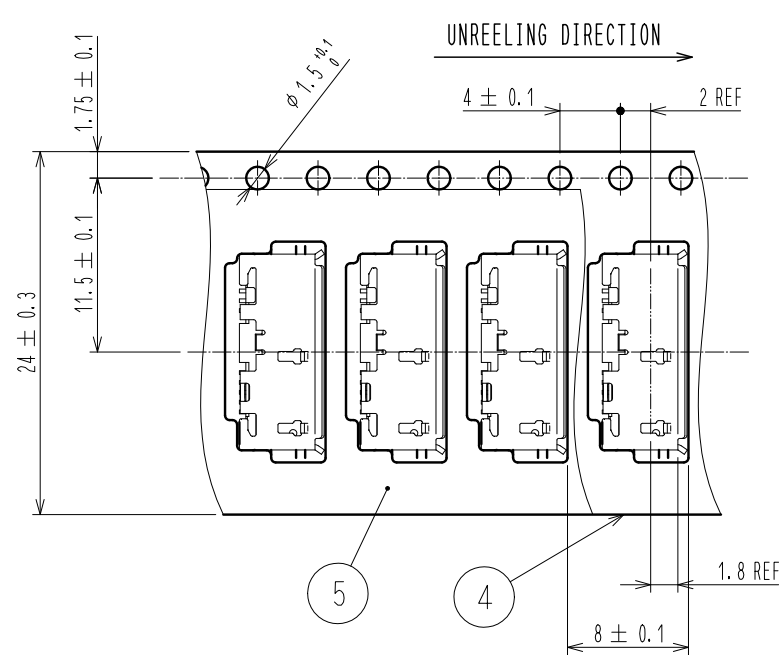


3 DRAWING FOR PACKAGING (FREE)

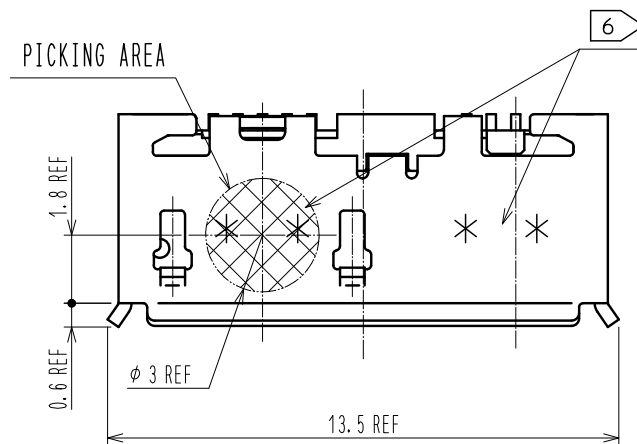

6 LOT NUMBER (4 DIGITS)

YEAR	MONTH	DAY	LINE No.
YEAR CODE	MONTH CODE	DAY CODE	LINE No. CODE
2009	9	Jan. A	1
2010	0	Feb. B	2
2011	1	Mar. C	3
2012	2	Apr. D	4
2013	3	May. E	5
		Jun. F	6
		Jul. G	7
		Aug. H	8
		Sep. I	9
		Oct. J	10
		Nov. K	11
		Dec. L	12

注 1 CO-PLANARITY IS WITHIN 0.08 mm.

2 THE PLATING SPECIFICATION


CONTACT AREA : PALLADIUM PLATING 0.75 μm MIN. + GOLD PLATING 0.05 μm MIN.
MOUNTING AREA : GOLD PLATING 0.05 μm MIN.
UNDERPLATING : NICKEL PLATING 2 μm MIN.

3 3000 PCS PER REEL.


4 . CONNECTOR OPENING CONFIGURATION SATISFIES USB3.0 SPECIFICATIONS.

5 . SCRATCH MARK COULD BE MADE ON THE SURFACE OF REF NO. 3 DURING ASSEMBLY PROCESS, WHICH DOES NOT AFFECT THE PERFORMANCE.
LEVEL OF PLATING BRIGHTNESS COULD VARY, WHICH DOSE NOT AFFECT THE PERFORMANCE.



6 INDICATE THE LOT NO. WITH 4 DIGITS AT THE SPECIFIED POSITION.

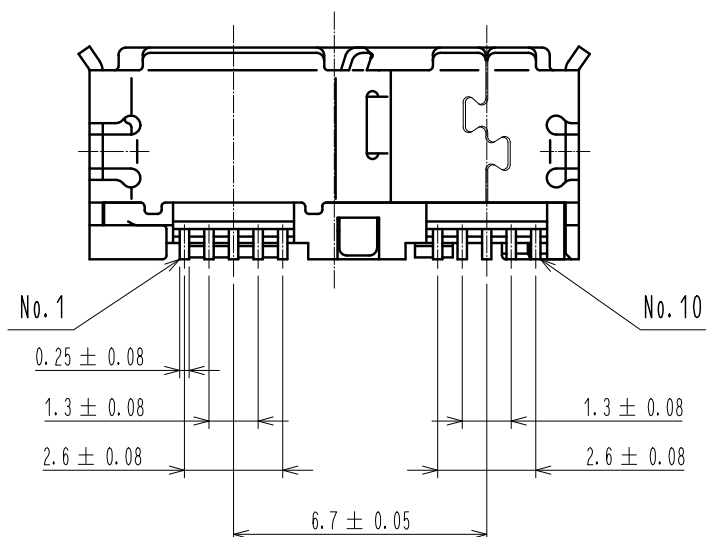

2	COPPER ALLOY	2	5	PE	
1	LCP	UL94V-0, BLACK	4	PS	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm	SCALE 5 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED
DATE	DATE	DATE	DATE	DATE	DATE
APPROVED : A0. SUZUKI	10.08.07	DRAWING NO.	EDC3-127028-00		
CHECKED : KN. ICHIKAWA	10.08.07	PART NO.	ZX360D-B-10P		
DESIGNED : AH. KODAMA	10.08.06	CODE NO.	CL242-0500-1-00		
DRAWN : TS. SAKAIZAWA	09.06.15				

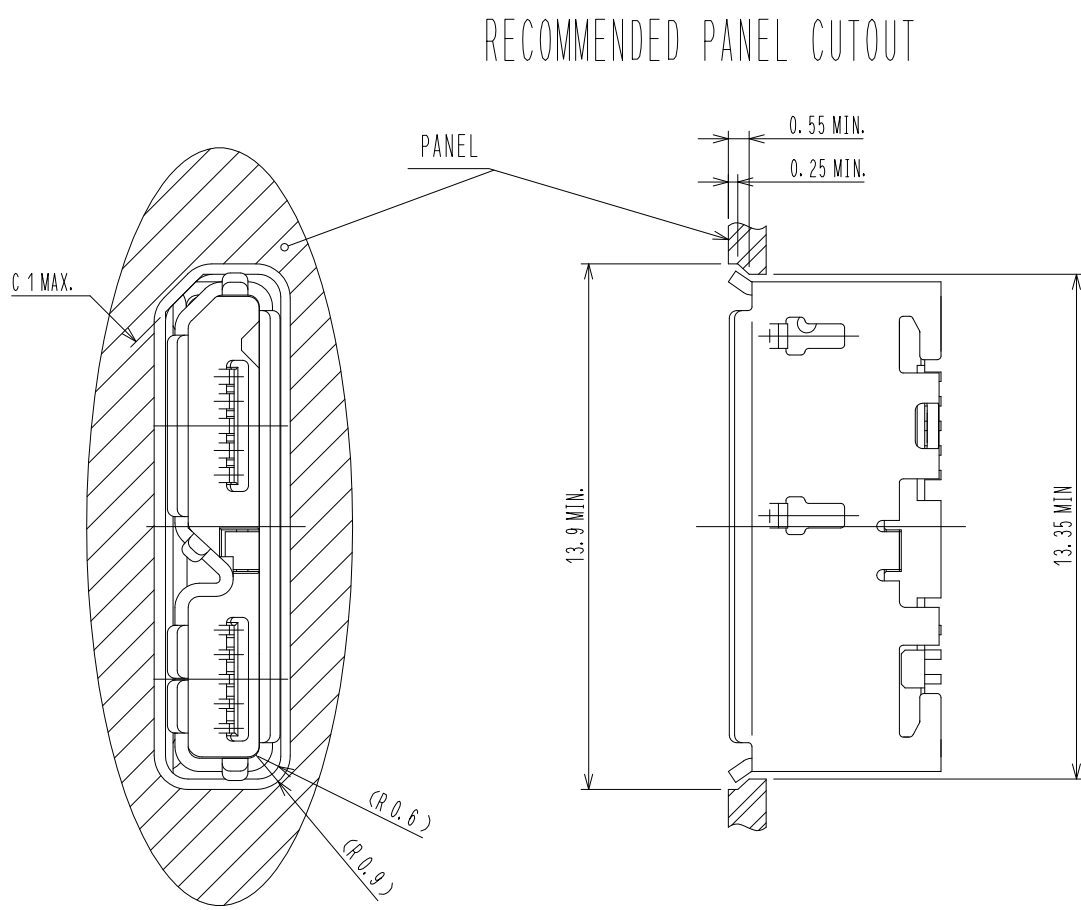

MATED WITH CORRESPONDING PLUG

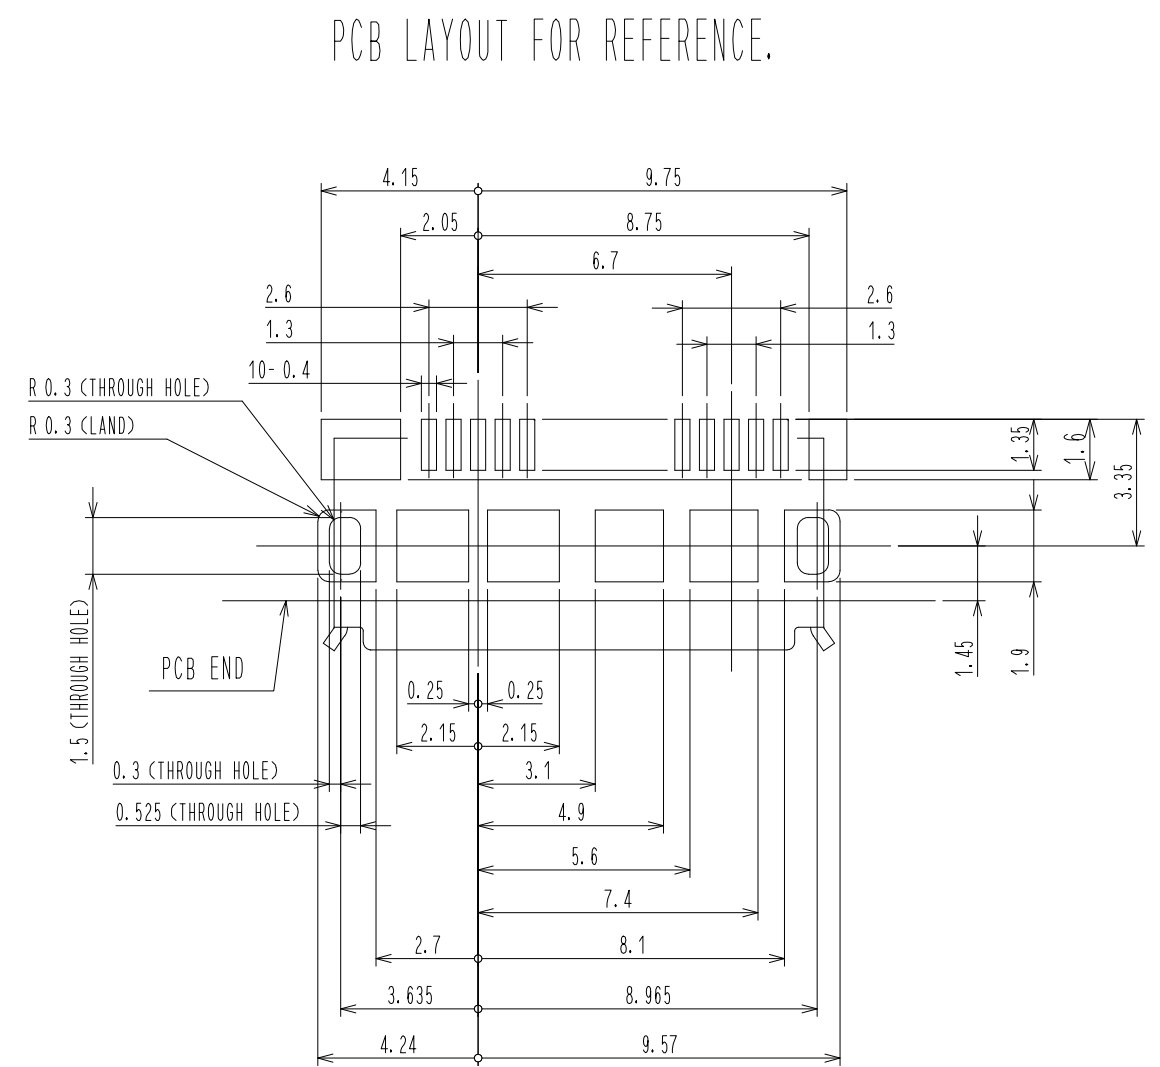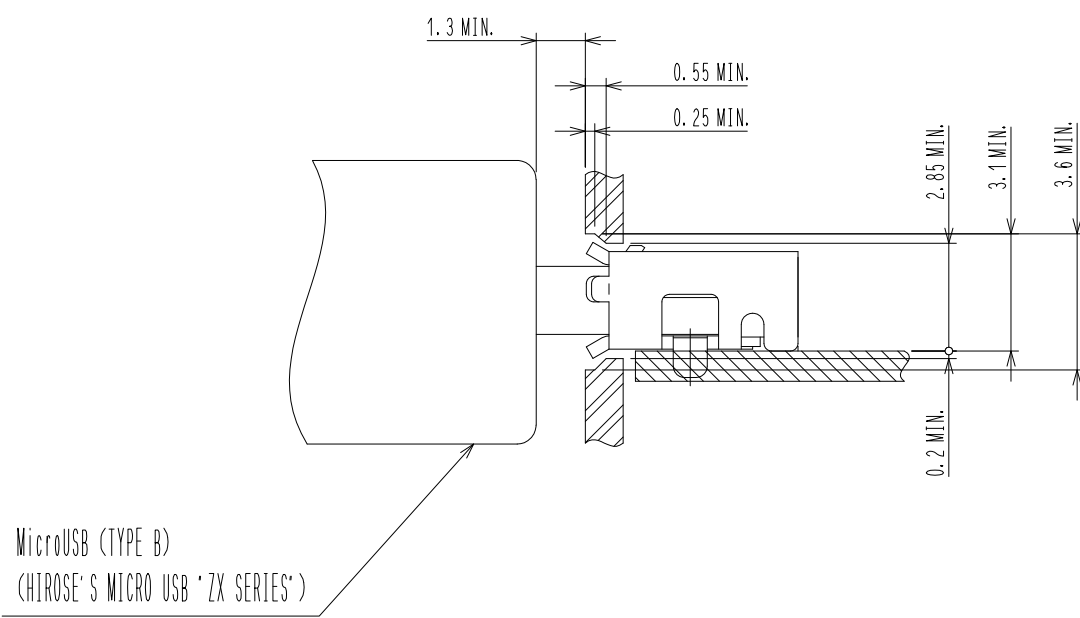

KEEP THE TOLERANCE WITHIN $\pm 0.05\text{mm}$

HRS	DRAWING NO.	EDC3-127028-00	2/2
	PART NO.	ZX360D-B-10P	
	CODE NO.	CL242-0500-1-00	