


INSTRUCTIONS FOR USE

COMPLEX DESIGN

NEPTUNE™ KEVLAR® Lightweight gloves

A. Use

These gloves are designed to protect the hand against light mechanical cut risks. They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420, EN 388 and EN 407.

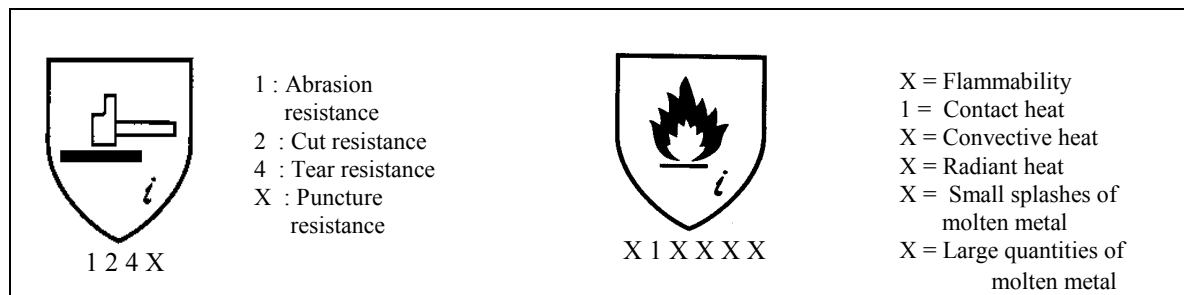

EC-Type examination certificate from DuPont (I.D. 0479) and EC-Quality Control for the final product by Centexbel Belgium (I.D. 0493).

B. Precautions for use

NEVER USE THESE GLOVES AGAINST CHEMICALS. The gloves are not puncture resistant and should not be used for protection against serrated blades.

Do not use against flames or longer than 15 seconds at temperatures exceeding 100 °C.

Before usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged or worn out gloves.

C. Ingredients / Hazardous ingredients

These gloves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.
Keep out from sources of ozone or ignition.

Cleaning : The gloves can be laundered at 40 °C maximum.

E. Disposal

Used gloves may be contaminated with infectious or other hazardous materials. Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Ltd.
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Size	Length
Light weight	70-205	7, 8, 9, 10	220 – 280 mm
Light weight with PVC dots	70-325		

Size 7 is “Fit for special purpose”

INSTRUCTIONS FOR USE


COMPLEX DESIGN

NEPTUNE™ KEVLAR® 70-216

A. Use

These gloves are designed to protect the hand against light to medium duty mechanical cut risks.

They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420 : 1994 , EN 388 : 1994 and EN 407 : 1994.

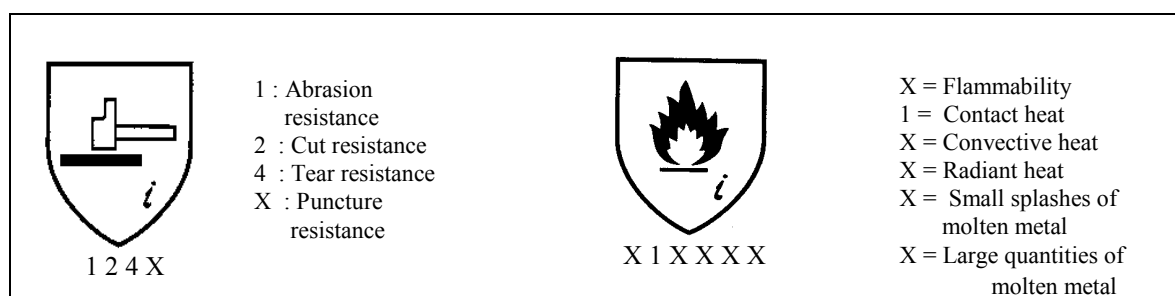

EC-Type examination certificate and EC-Quality Control for the final product by Centexbel Belgium (I.D. 0493) – Technologiemark 7 – B 9052 Zwijnaarde.

B. Precautions for use

NEVER USE THESE GLOVES AGAINST CHEMICALS. The gloves are not puncture resistant and should not be used for protection against serrated blades.

Do not use against flames or longer than 15 seconds at temperatures exceeding 100 °C.

Before usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged or worn out gloves.

C. Ingredients / Hazardous ingredients

These gloves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.

Keep out from sources of ozone or ignition.

Cleaning : The customer or launderer is responsible for the performance of the gloves after laundering. Ansell cannot take any responsibility in this.



E. Disposal

Used gloves may be contaminated with infectious or other hazardous materials. Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Healthcare Europe
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Size	Length
Light weight	70-216	7, 8 , 9 , 10	220 – 280 mm

Size 7 is “Fit for special purpose”

INSTRUCTIONS FOR USE


COMPLEX DESIGN

NEPTUNE™ KEVLAR® Mediumweight gloves

A. Use

These gloves are designed to protect the hand against light to medium duty mechanical cut risks.

They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420, EN 388 and EN 407.

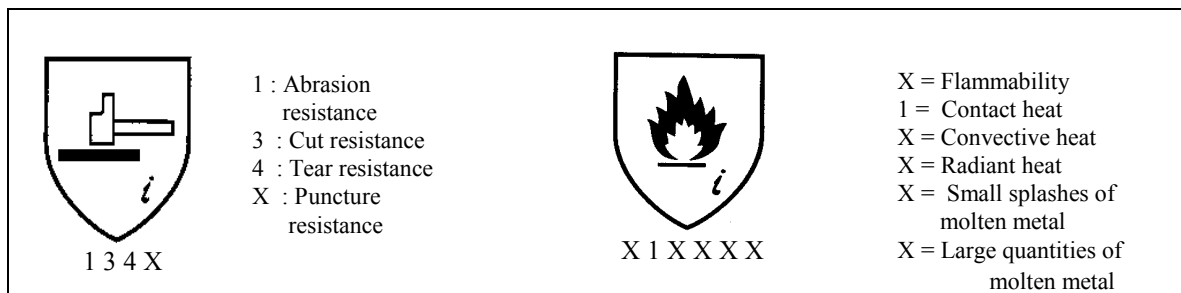

EC-Type examination certificate from DuPont (I.D. 0479) and EC-Quality Control for the final product by Centexbel Belgium (I.D. 0493).

B. Precautions for use

NEVER USE THESE GLOVES AGAINST CHEMICALS. The gloves are not puncture resistant and should not be used for protection against serrated blades.

Do not use longer than 30 seconds at 100 °C. Do not use against temperatures exceeding 200 °C.

The versions with dots should not be used against temperatures exceeding 90 °C.

Before usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged or worn out gloves.

C. Ingredients / Hazardous ingredients

These gloves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.
Keep out from sources of ozone or ignition.

Cleaning : The gloves can be laundered at 40 °C maximum.

E. Disposal

Used gloves may be contaminated with infectious or other hazardous materials.
Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Ltd.
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Size	Length
Medium weight	70-215	7, 8, 9, 10	220 – 280 mm
Medium weight with PVC dots	70-335		
Medium weight / without fingertips	70-420	7, 8, 9, 10	190-250 mm
Medium weight with PVC dots/ without fingertips	70-421		

These gloves are “Fit for special purpose”

INSTRUCTIONS FOR USE



COMPLEX DESIGN

NEPTUNE™ KEVLAR® Heavyweight gloves

A. Use

These gloves are designed to protect the hand against medium to heavy duty mechanical cut risks.

They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420, EN 388 and EN 407.

 2 4 4 X	2 : Abrasion resistance 4 : Cut resistance 4 : Tear resistance X : Puncture resistance	 X 1 X X X X	X = Flammability 1 = Contact heat X = Convective heat X = Radiant heat X = Small splashes of molten metal X = Large quantities of molten metal
--	---	--	---

EC-Type examination certificate from DuPont (I.D. 0479) and EC-Quality Control for the final product by Centexbel Belgium (I.D. 0493).

B. Precautions for use

NEVER USE THESE GLOVES AGAINST CHEMICALS. The gloves are not puncture resistant and should not be used for protection against serrated blades.

Do not use longer than 35 seconds at 100 °C. Do not use against temperatures exceeding 200 °C.

The versions with dots should not be used against temperatures exceeding 90 °C.

Before usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged or worn out gloves.

C. Ingredients / Hazardous ingredients

These gloves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.
Keep out from sources of ozone or ignition.

Cleaning : The gloves can be laundered at 40 °C maximum.

E. Disposal

Used gloves may be contaminated with infectious or other hazardous materials.
Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Ltd.
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Size	Length
Heavy weight	70-225	7, 8, 9, 10	220 – 280 mm
Heavy weight with PVC dots	70-345		

Size 7 is “Fit for special purpose”

INSTRUCTIONS FOR USE



COMPLEX DESIGN

NEPTUNE™ KEVLAR® Extra Heavyweight gloves

A. Use

These gloves are designed to protect the hand against light to medium duty mechanical cut risks.

They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420, EN 388 and EN 407.

	2 : Abrasion resistance 4 : Cut resistance 4 : Tear resistance X : Puncture resistance		X = Flammability 1 = Contact heat X = Convective heat X = Radiant heat X = Small splashes of molten metal X = Large quantities of molten metal
2 4 4 X		X 1 X X X X	

EC-Type examination certificate from DuPont (I.D. 0479) and EC-Quality Control for the final product by Centexbel Belgium (I.D. 0493).

B. Precautions for use

NEVER USE THESE GLOVES AGAINST CHEMICALS. The gloves are not puncture resistant and should not be used for protection against serrated blades.

Do not use longer than 35 seconds at 100 °C. Do not use against temperatures exceeding 200 °C.

Before usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged or worn out gloves.

C. Ingredients / Hazardous ingredients

These gloves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.

Keep out from sources of ozone or ignition.

Cleaning : The gloves can be laundered at 40 °C maximum.

E. Disposal

Used gloves may be contaminated with infectious or other hazardous materials. Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Ltd.
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Size	Length
Extra Heavy weight	75-105	7, 8, 9, 10	220 – 280 mm

Size 7 is “Fit for special purpose”

INSTRUCTIONS FOR USE


COMPLEX DESIGN

KEVLAR® SLEEVES

A. Use

These sleeves are designed to protect the forearm and part of the hands against mechanical and thermal risks.

They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420, EN 388 and EN 407.

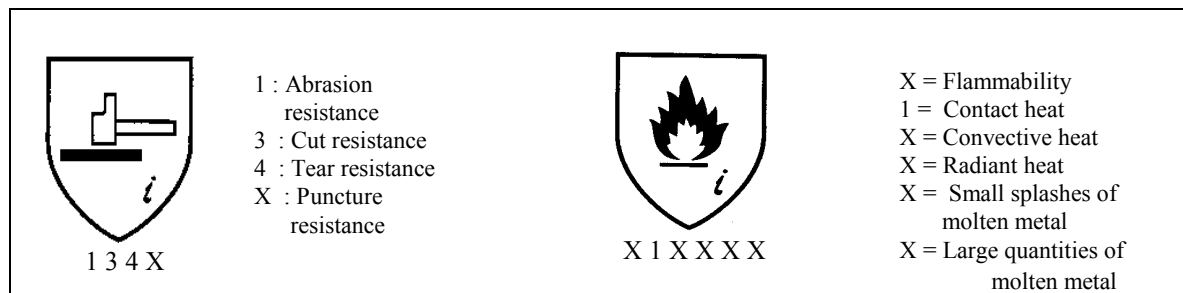

EC-Type examination certificate from DuPont (I.D. 0479) and EC-Quality Control for the final product by Centexbel Belgium (I.D. 0493).

B. Precautions for use

NEVER USE THESE SLEEVES AGAINST CHEMICALS. The sleeves are not puncture resistant and should not be used for protection against serrated blades.

Do not use against flames or longer than 10 seconds at temperatures exceeding 100 °C.

Before usage, inspect the sleeves for any defects or imperfections. Avoid wearing damaged or worn out sleeves.

C. Ingredients / Hazardous ingredients

These sleeves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.
Keep out from sources of ozone or ignition.

Cleaning : The sleeves can be laundered at 40 °C maximum.

E. Disposal

Used sleeves may be contaminated with infectious or other hazardous materials.
Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Ltd.
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Length
Sleeve with slot	70-110	254 mm
	70-114	356 mm
	70-118	457 mm
	70-122	559 mm
Sleeve with Velcro	70-123	559 mm


INSTRUCTIONS FOR USE

INTERMEDIATE DESIGN

KEVLAR® K3200 GLOVES

A. Use

These gloves are designed to protect the hands against mechanical (mainly cut) risks. They are in conformity and are marked as per requirements of the European Directive 89/686/EEC and its Amendments and they are in compliance with the European Standards EN 420 and EN 388.

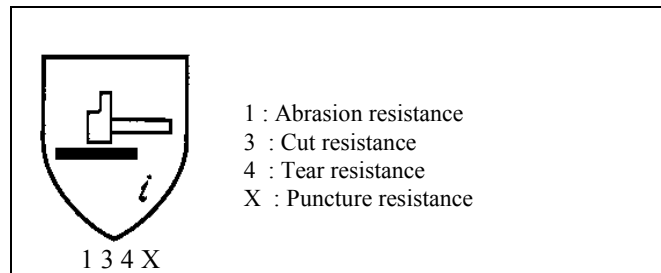

EC-Type examination certificate by Centexbel Belgium (I.D. 0493).

B. Precautions for use

NEVER USE THESE GLOVES AGAINST CHEMICALS. The gloves are not puncture resistant and should not be used for protection against serrated blades.

Before usage, inspect the gloves for any defects or imperfections. Avoid wearing damaged or worn out gloves.

C. Ingredients / Hazardous ingredients

These gloves do not contain any ingredients which are known to be a possible cause of allergies to sensitised people.

If allergic reactions would occur, obtain medical advice immediately.

D. Care instructions

Storage : Keep out from direct sunlight; store in a cool and dry place.
Keep out from sources of ozone or ignition.

Cleaning : The gloves can be laundered at 40 °C maximum.

E. Disposal

Used gloves may be contaminated with infectious or other hazardous materials. Dispose of according to Local Authority Regulations. Landfill or incinerate under controlled conditions.

Ansell Protective Products
Internationale Laan 55
1070 Brussels
Belgium

Type	Reference	Length
Kevlar® knitted gloves	K 3200	220 to 290 mm