SIEMENS

Product data sheet   **3SB3000-1QA11**
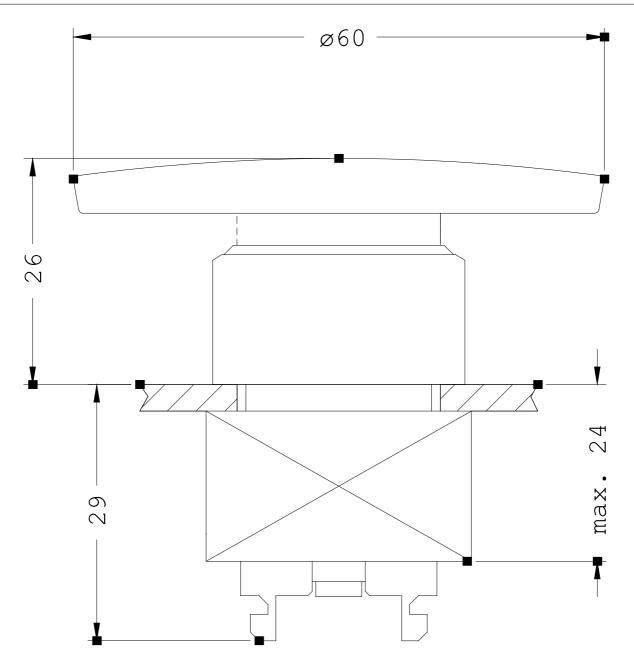
22MM PLASTIC ROUND ACTUATOR:
MUSHR.PUSHBUTTON 60MM MOMENTARY CONTACT
TYPE WITH HOLDER BLACK

Actuator / signaling device:

Design of the operating mechanism		mushromm pushbutton
Type of unlocking device		without
Color / of the activation element		black
Material / of the activation element		plastic
Number of switching positions		2
Product component / front ring		Yes
Material / of the front ring		plastic
Color / of the front ring		black
Design of front ring		Standard
Product function / EMERGENCY STOP function		No

Holder:

Material / of holder	Plastic

General technical details:

Resistance against shock		
• for devices without incandescent lamp / according to IEC 60068-2-27		<= 50g
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Operating cycles / maximum	1/h	1,000

07/26/2012

Mechanical operating cycles as operating time / typical		10,000,000
Item designation		
• according to DIN EN 61346-2		S
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		S
Tightening torque / of the screws in the bracket / maximum	N·m	1
Ambient temperature		
• during operating	°C	-25 … +70
• during storage	°C	-40 … +80
Protection class IP		IP66
climatic class / during the operating phase / according to EN 60721		3K6
Type of mounting		front mounting
Shape / of the installation hole		round
Installation width	mm	60
Mounting diameter	mm	22
Mounting height	mm	24.5
Mounting depth	mm	29

Certificates/approvals:

General Product Approval

CSA   GOST   UL

Test Certificates

Special Test Certificate

Shipping Approval

ABS   BUREAU VERITAS   DNV   Lloyd's Register LRS   PRS   RINA

other

Confirmation   other

UL

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/industrial-controls/mall

Cax online generator:
http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/3SB3000-1QA11/all

---

⌀60

26

29

max. 24

last change: Jul 17, 2012