




3M™ FOUR-WALL HEADER, 2500 SERIES
.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE

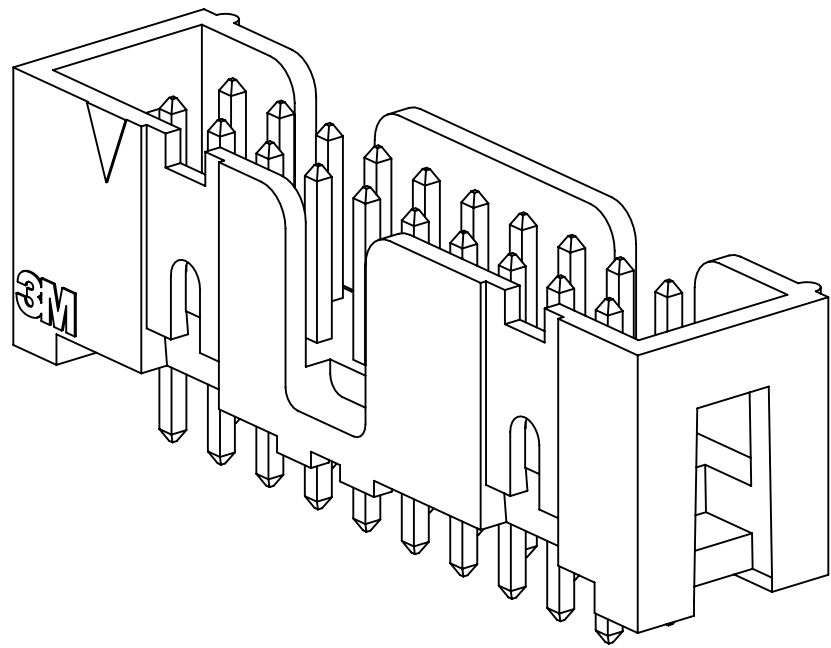

25XX-60XX
STRAIGHT VERSION

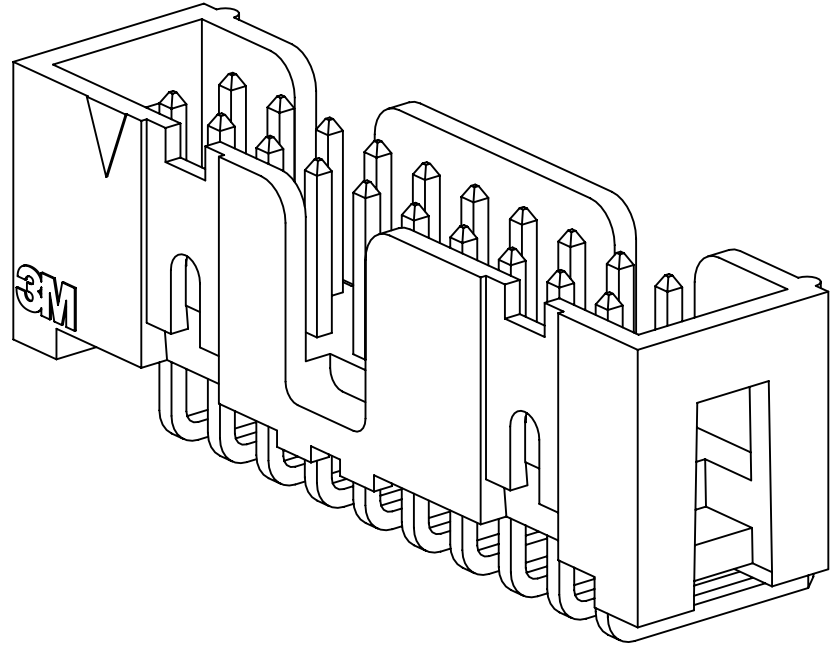

25XX-50XX
RIGHT ANGLE VERSION

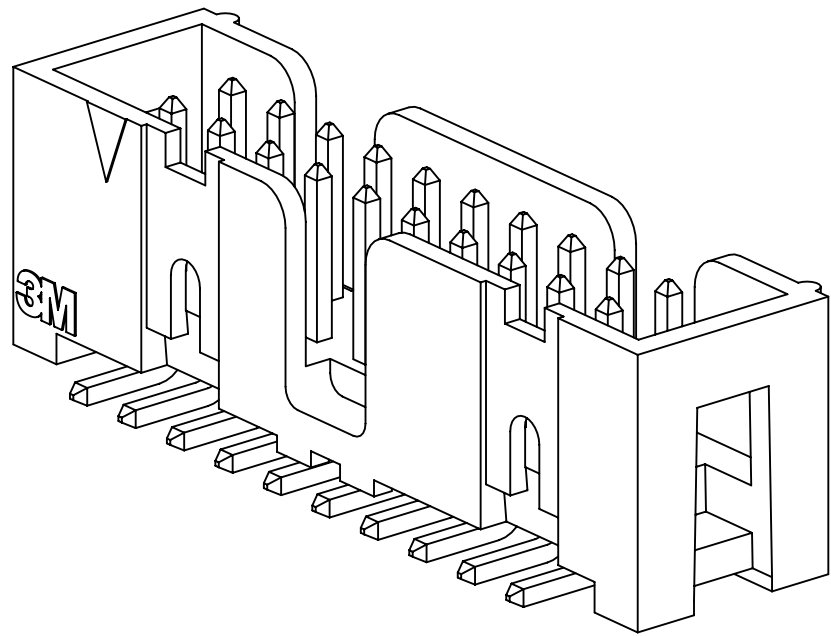

25XX-6V0C
SURFACE MOUNT VERSION

- * LOW PROFILE, SPACE SAVING DESIGN.
- * CENTER SLOT POLARIZATION PREVENTS MIS-INSERTIONS AND REDUCES INSERTION TIME.
- * DUAL SLOT POLARIZATION MEANS BROADER COMPATIBILITY WITH COMPETITIVE POLARIZATION DESIGNS (NOT AVAILABLE ON 6, 8 OR 10 POSITIONS).
- * OPTIONAL RETAINER CLIP FOR LOCKING SOCKETS IN PLACE AND INCREASING CONNECTION RELIABILITY IN VIBRATION-PRONE ENVIRONMENTS.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * THROUGH HOLE VERSION SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.
- * EXPOSED SOLDER TAILS (ON RIGHT ANGLE VERSION) PROVIDE EASE OF CLEANING AND REDUCED REPAIR COST.
- * STRAIGHT SURFACE MOUNT VERSION AVAILABLE.

2 PHYSICAL :

INSULATOR: MATERIAL: GLASS FILLED POLYESTER (PCT)
FLAMMABILITY: UL94V-0
COLOR: BLACK
CONTACT: MATERIAL: COPPER ALLOY
PLATING: UNDER PLATING: 100µ" (2.54µm) NICKEL-OVERALL
WIPING AREA: AVG. GOLD (SEE ORDERING INFORMATION)
SOLDER TAILS: 200µ" (5.08µm) TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

2 ELECTRICAL :

CURRENT RATING: 5.00A, 1 CONTACT POWERED
3.00A, 6 CONTACTS POWERED
1.75A, ALL CONTACTS POWERED
RATING CONDITIONS: EIA-364-070 METHOD 2, 30°C MAXIMUM TEMPERATURE RISE, 20% DERATED. REFERENCE APPROPRIATE 3M PRODUCT SPECIFICATION FOR DETAILED CURRENT DERATING CURVES.
INSULATION RESISTANCE: >1 X 10⁹Ω AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL

2 ENVIRONMENTAL :

TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)

NOTES

1. REGULATORY INFORMATION: ROHS COMPLIANT. SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF WWW.3MCONNECTORS.COM FOR COMPLIANCE INFORMATION.
2. IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENT.
3. NOTCHES A & C WILL ACCOMODATE 3M POLARIZING KEY: N3518.
4. CONTACT TAILS .0245 (.622) WIRE WITH .0075 (.191) CORNER WIRE AND .028 (.072) DIAGONAL.
5. SOLDER STANDOFFS FACILITATE .01 (.3) CLEARANCE ABOVE BOARD FOR REFLOW SOLDERING.

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
XXXXX						
XXXXX						
DIVISION	DIVISION CODE	DR	DATE	MFG	DATE	
Interconnect Solutions	EMSD	CASTIGLIONE	AUG 11, 2014	R. SCHERER	SEP 05, 2014	
DO NOT SCALE DRAWING	SCALE 4 1	TOLERANCES EXCEPT AS NOTED	INCHES .0 ± .01 .000 ± .005 .0000 ±			
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	MILLIMETERS 0 ± .0 .00 ± .13 .000 ±	CAGE NUMBER D 78-5100-0770-7			
MAX SURFACE ROUGHNESS	DET SURFACES	MARKED ONLY	MODEL 2500 SERIES			
				TITLE HEADER, 4-WALL, LO-PRO, .100 X .100, SMT, STRAIGHT & RA		REV. N
				CAGE NUMBER D 78-5100-0770-7		REV. N
				MODEL 2500 SERIES		REV. N
				DET LISTS		YES X NO
				SHT 1 OF 5		

3M ELECTRONIC MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3mconnectors.com>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

UL FILE NO: E68080

3M™ FOUR-WALL HEADER, 2500 SERIES
.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE




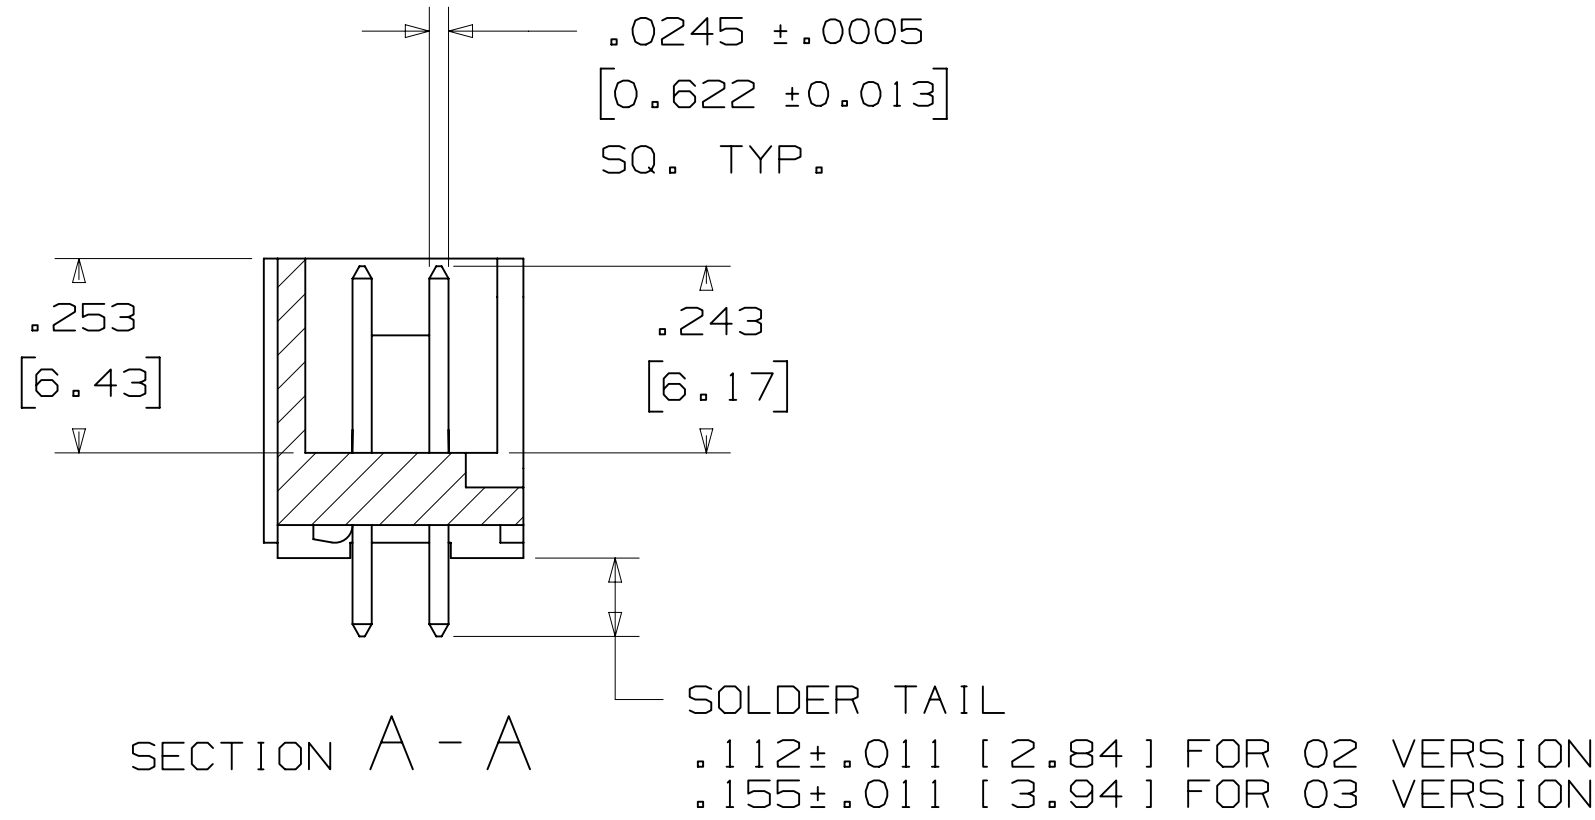


TABLE 1				
PIN QTY.	DIM. "A"	DIM. "B"	POLARIZING NOTCHES	PIN QTY.
06	.588 [14.94]	.508 [12.90]	B	06
08	.688 [17.48]	.608 [15.44]	B	08
10	.788 [20.02]	.708 [17.98]	BC	10
14	.988 [25.10]	.908 [23.06]	BCDE	14
16	1.088 [27.64]	1.008 [25.60]	ABCDE	16
20	1.288 [32.72]	1.208 [30.68]	ABCDE	20
24	1.488 [37.80]	1.408 [35.76]	ABCDE	24
26	1.588 [40.34]	1.508 [38.30]	ABCDE	26
30	1.788 [45.42]	1.708 [43.38]	ABCDE	30
34	1.988 [50.50]	1.908 [48.46]	ABCDE	34
36	2.088 [53.04]	2.008 [51.00]	ABCDE	36
40	2.288 [58.12]	2.208 [56.08]	ABCDE	40
50	2.788 [70.82]	2.708 [68.78]	ABCDE	50
60	3.288 [83.52]	3.208 [81.48]	ABCDE	60
64	3.488 [88.60]	3.408 [86.56]	ABCDE	64

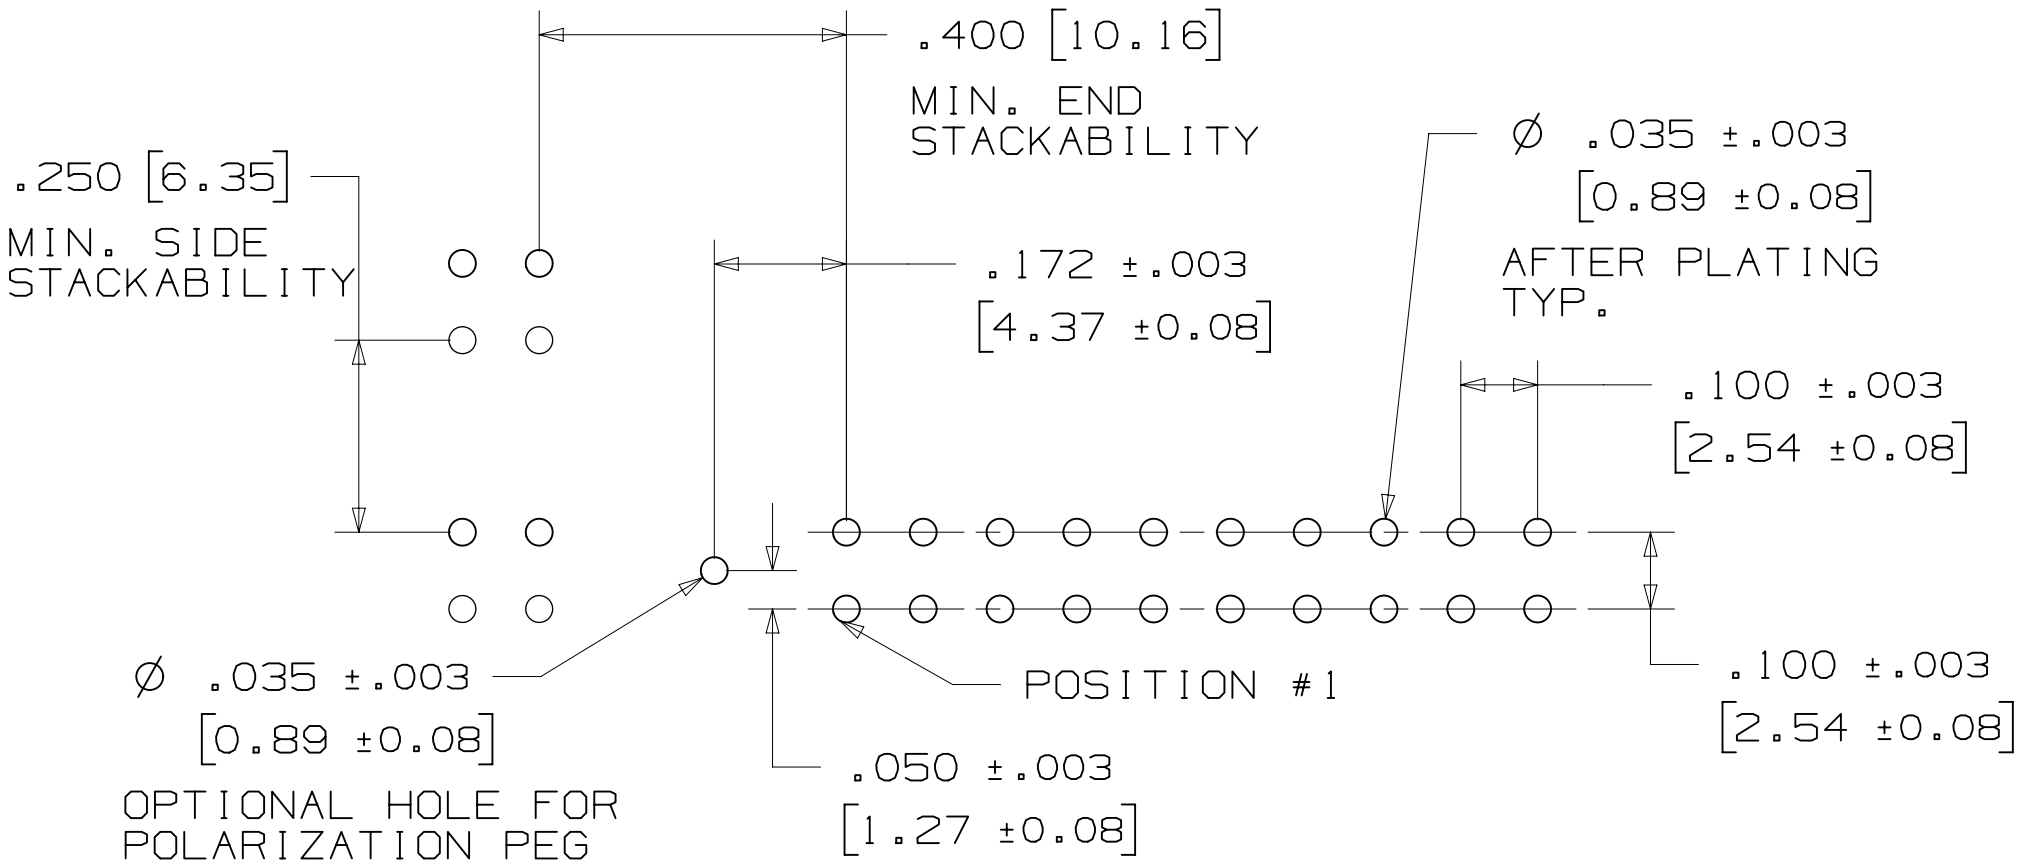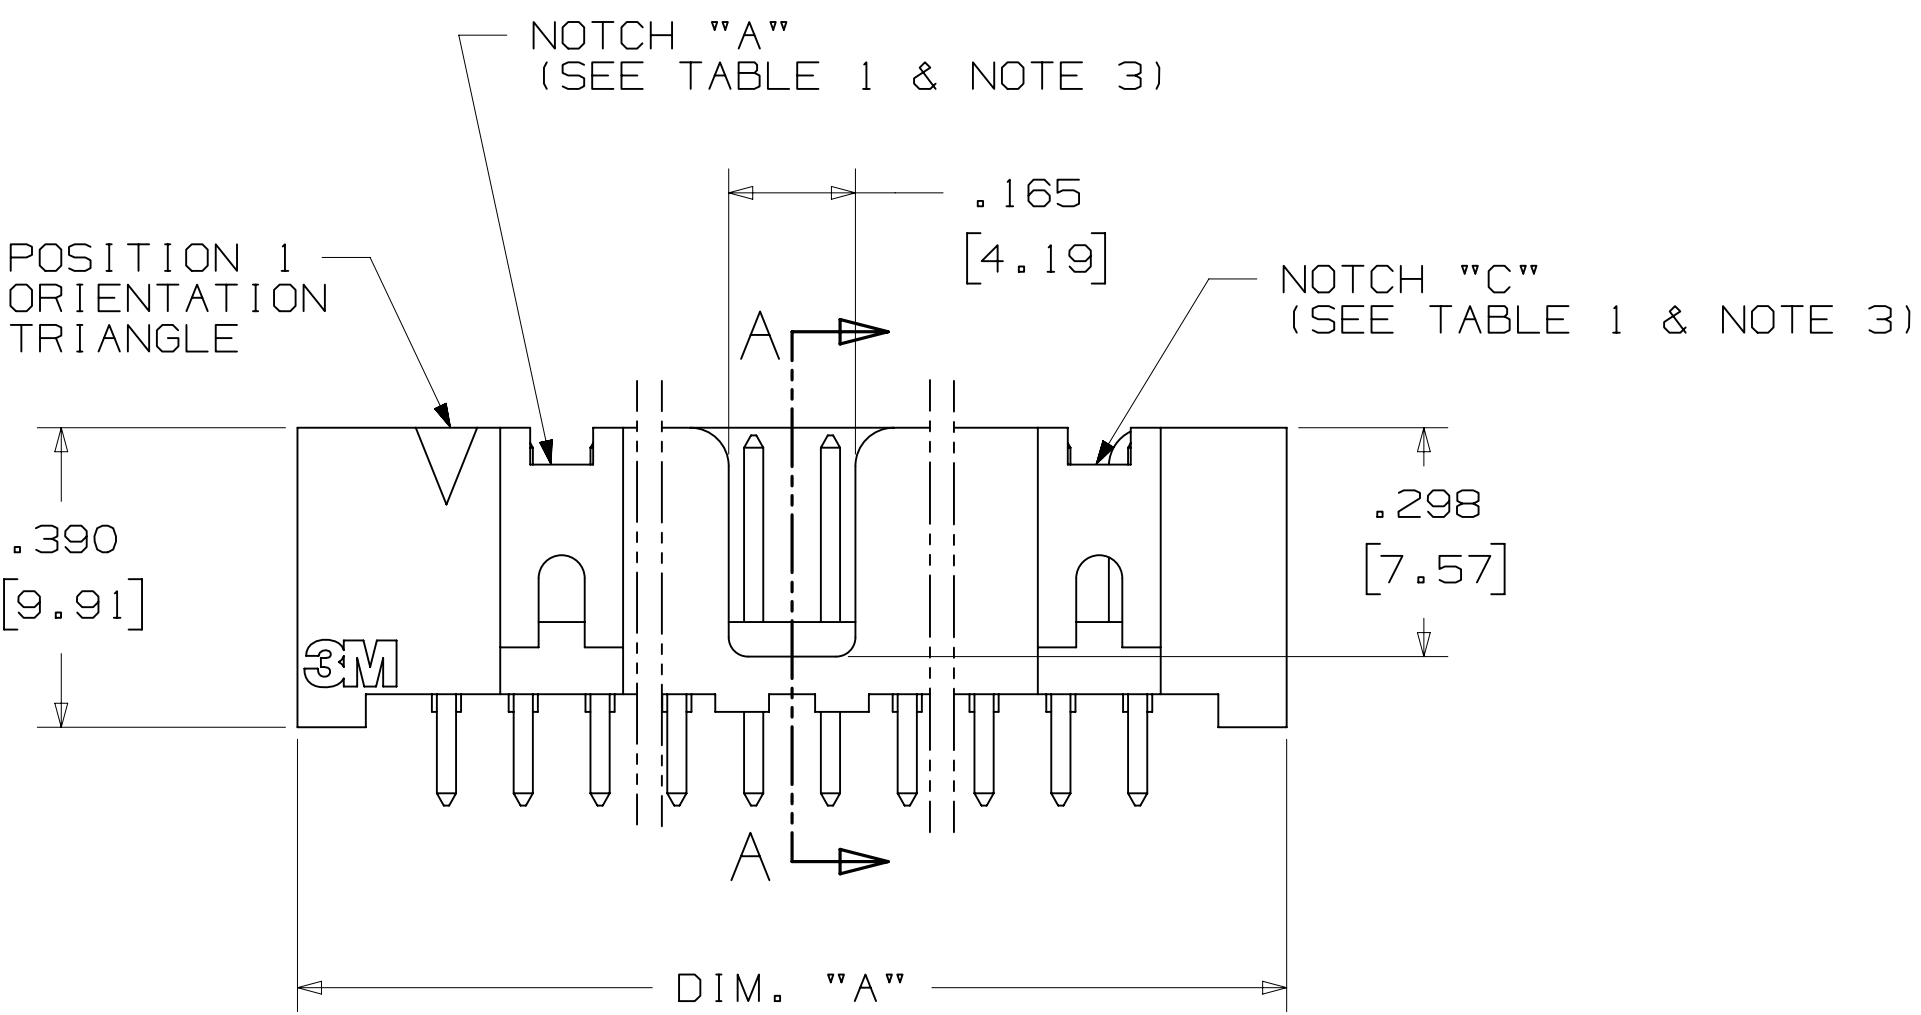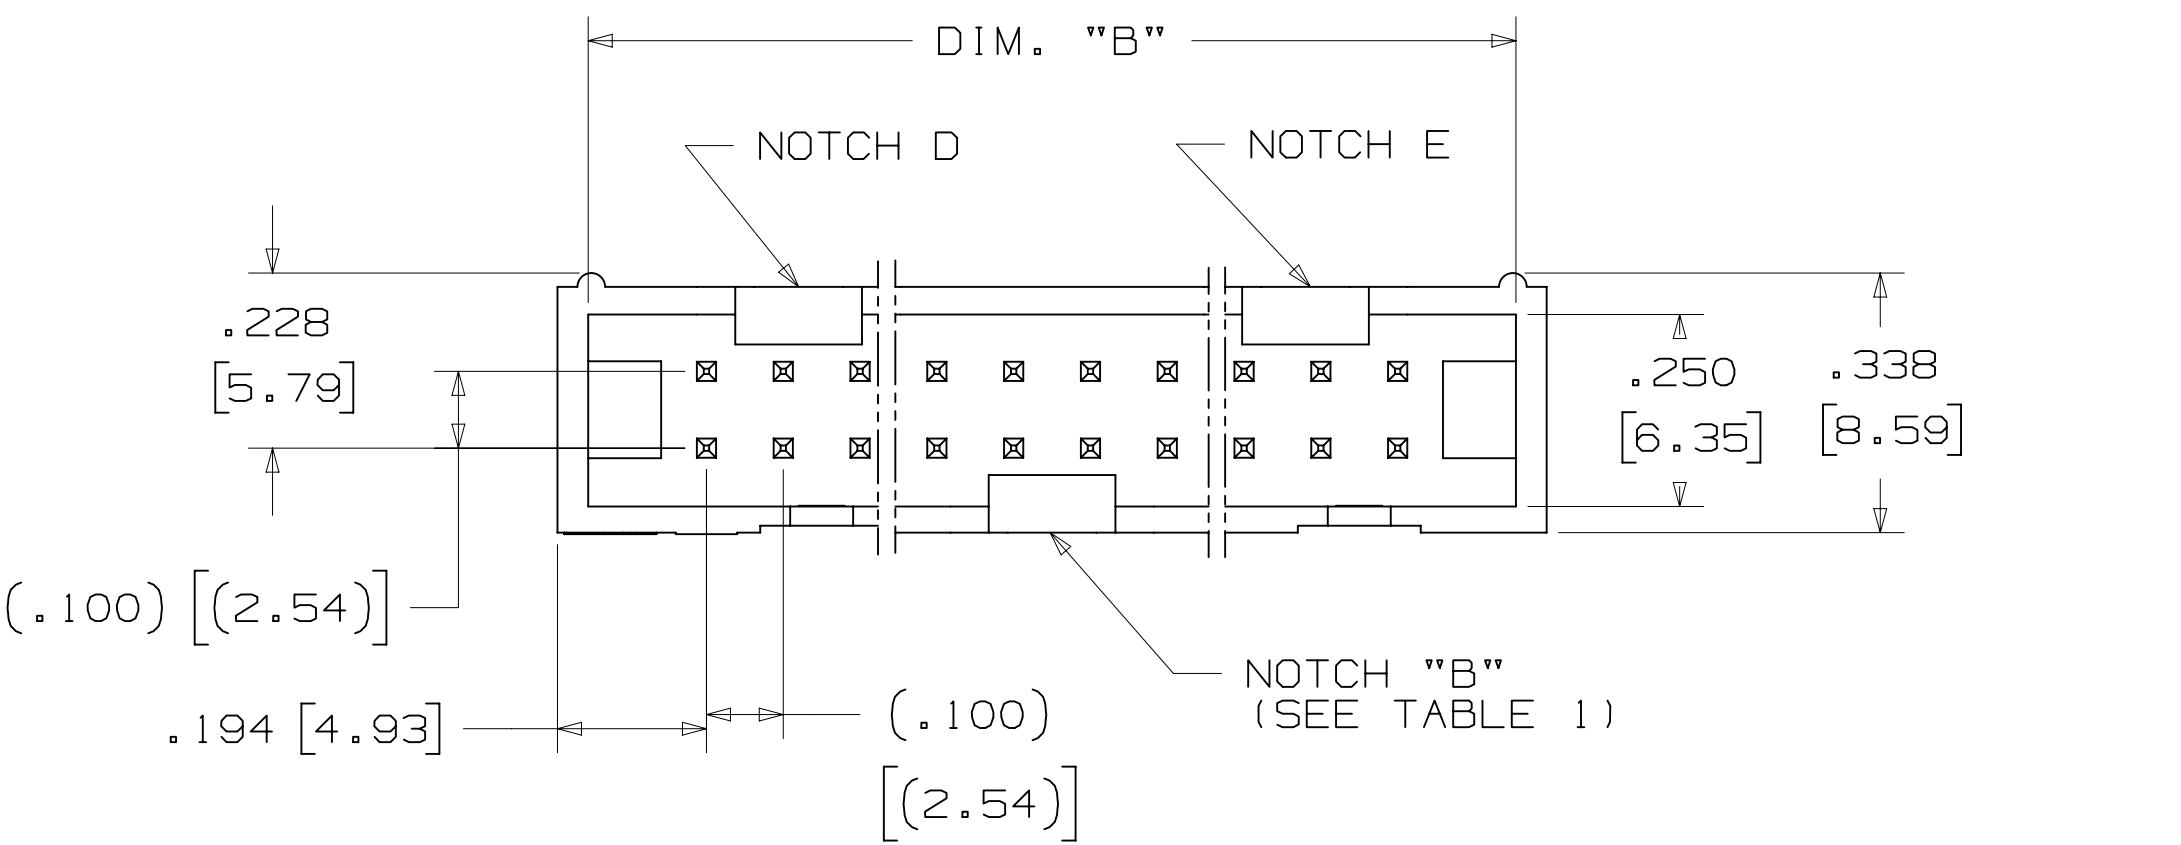

ORDERING INFORMATION
STRAIGHT VERSION

X25XX-60XX-XX

N= HIGH TEMP BLACK (PCT)
(RB, UB OR UG PLATING REQ'D)
BLANK= (UB OR UG PLATING)
PIN QUANTITY:
(SEE TABLE 1)
SOLDER TAIL:
02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18]
THICK BOARD


PLATING:
RB = 30μ" [0.76μm] AVG. GOLD
200μ" [5.08μm] MATTE TIN (RIA, E1 & C1 APPLY)
UG = 15μ" [0.38μm] AVG. GOLD
200μ" [5.08μm] 60:40 TIN-LEAD SOLDER TAILS
(RIA E3 & C2 APPLY)
UB = 30μ" [0.76μm] AVG. GOLD
200μ" [5.08μm] 60:40 TIN LEAD SOLDER TAILS
(RIA E3 & C2 APPLY)

RECOMMENDED HOLE PATTERN
SHOWN FROM COMPONENT SIDE

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
Header CODES		DRP	CASTIGLIONE	DATE	MFG	DATE
		CHKD		AUG 11, 2014	R. SCHERER	SEP 05, 2014
DIVISION	Interconnect Solutions	DIVISION CODE	EMSD	© 3M COPYRIGHT 2016		
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED		3M Center St. Paul, MN 55144		
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	INCHES .00 ±.01 .000 ±.005 .0000 ±		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
MAX SURFACE ROUGHNESS	MAX SURFACES	MILLIMETERS 0 ±.3 .00 ±.13 .000 ±		TITLE		
MARKED ONLY	ANGLES	CAGE NUMBER		DRAWING NO.		
		D78-5100-0770-7		REV. N		
		MODEL		2500 SERIES		
		DET		LISTS YES NO SHT 2 OF 5		

3M™ FOUR-WALL HEADER, 2500 SERIES

.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE

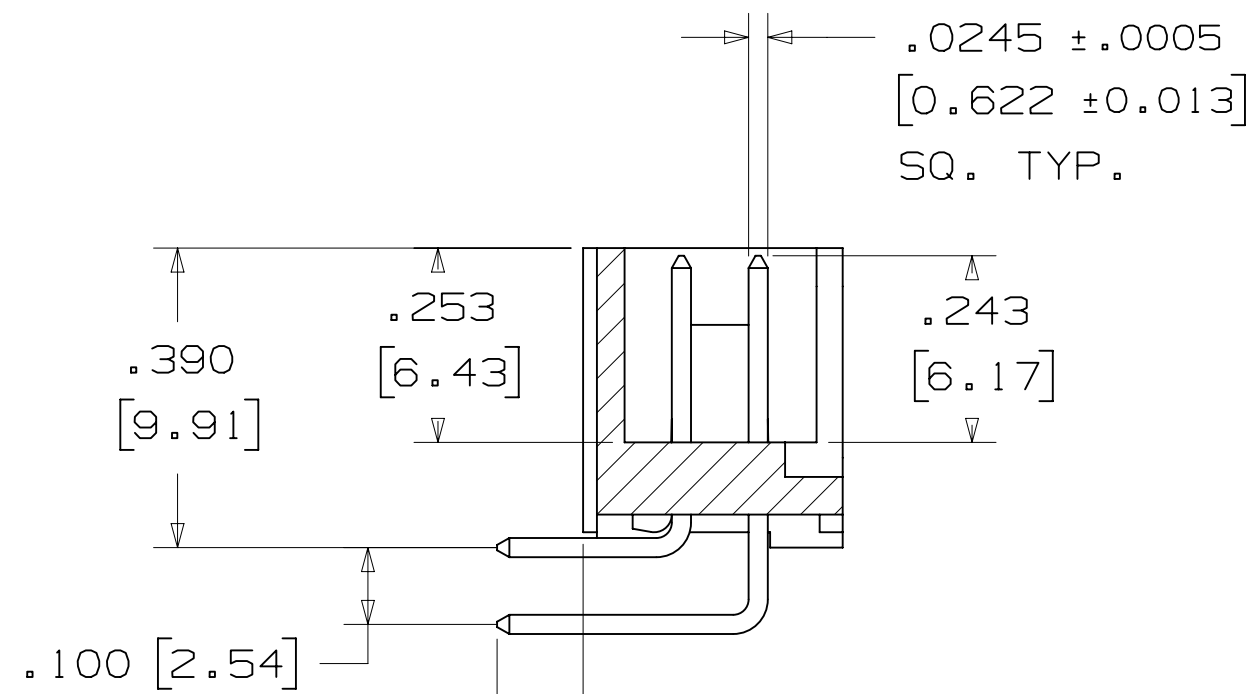

SOLDER TAIL

.112±.011 [2.84] FOR 02 VERSION
 .155±.011 [3.94] FOR 03 VERSION

SECTION B - B

TABLE 1				
PIN QTY.	DIM. "A"	DIM. "B"	POLARIZING NOTCHES	PIN QTY.
06	.588 [14.94]	.508 [12.90]	B	06
08	.688 [17.48]	.608 [15.44]	B	08
10	.788 [20.02]	.708 [17.98]	BC	10
14	.988 [25.10]	.908 [23.06]	BCDE	14
16	1.088 [27.64]	1.008 [25.60]	ABCDE	16
20	1.288 [32.72]	1.208 [30.68]	ABCDE	20
24	1.488 [37.80]	1.408 [35.76]	ABCDE	24
26	1.588 [40.34]	1.508 [38.30]	ABCDE	26
30	1.788 [45.42]	1.708 [43.38]	ABCDE	30
34	1.988 [50.50]	1.908 [48.46]	ABCDE	34
36	2.088 [53.04]	2.008 [51.00]	ABCDE	36
40	2.288 [58.12]	2.208 [56.08]	ABCDE	40
50	2.788 [70.82]	2.708 [68.78]	ABCDE	50
60	3.288 [83.52]	3.208 [81.48]	ABCDE	60
64	3.488 [88.60]	3.408 [86.56]	ABCDE	64

ORDERING INFORMATION
RIGHT ANGLE VERSION

X25XX-50XX-XX

N= HIGH TEMP BLACK (PCT) _____
(RB, UB OR UG PLATING REQ'D)
BLANK= (UB OR UG PLATING)

PIN QUANTITY:-
(SEE TABLE 1)




SOLDER TAIL: _____

02 = FOR .062 [1.57] THICK BOARD

03 = FOR .094 TO .125 [2.39 TO 3.18]
THICK BOARD

PLATING:


```
RB = 30 $\mu$ " [0.76 $\mu$ m] AVG. GOLD
    200 $\mu$ " [5.08 $\mu$ m] MATTE TIN (RIA, E1 & C1 APPLY)
UG = 15 $\mu$ " [0.38 $\mu$ m] AVG. GOLD
    200 $\mu$ " [5.08 $\mu$ m] 60:40 TIN-LEAD SOLDER TAILS
    (RIA E3 & C2 APPLY)
UB = 30 $\mu$ " [0.76 $\mu$ m] AVG. GOLD
    200 $\mu$ " [5.08 $\mu$ m] 60:40 TIN LEAD SOLDER TAILS
    (RIA E3 & C2 APPLY)
```

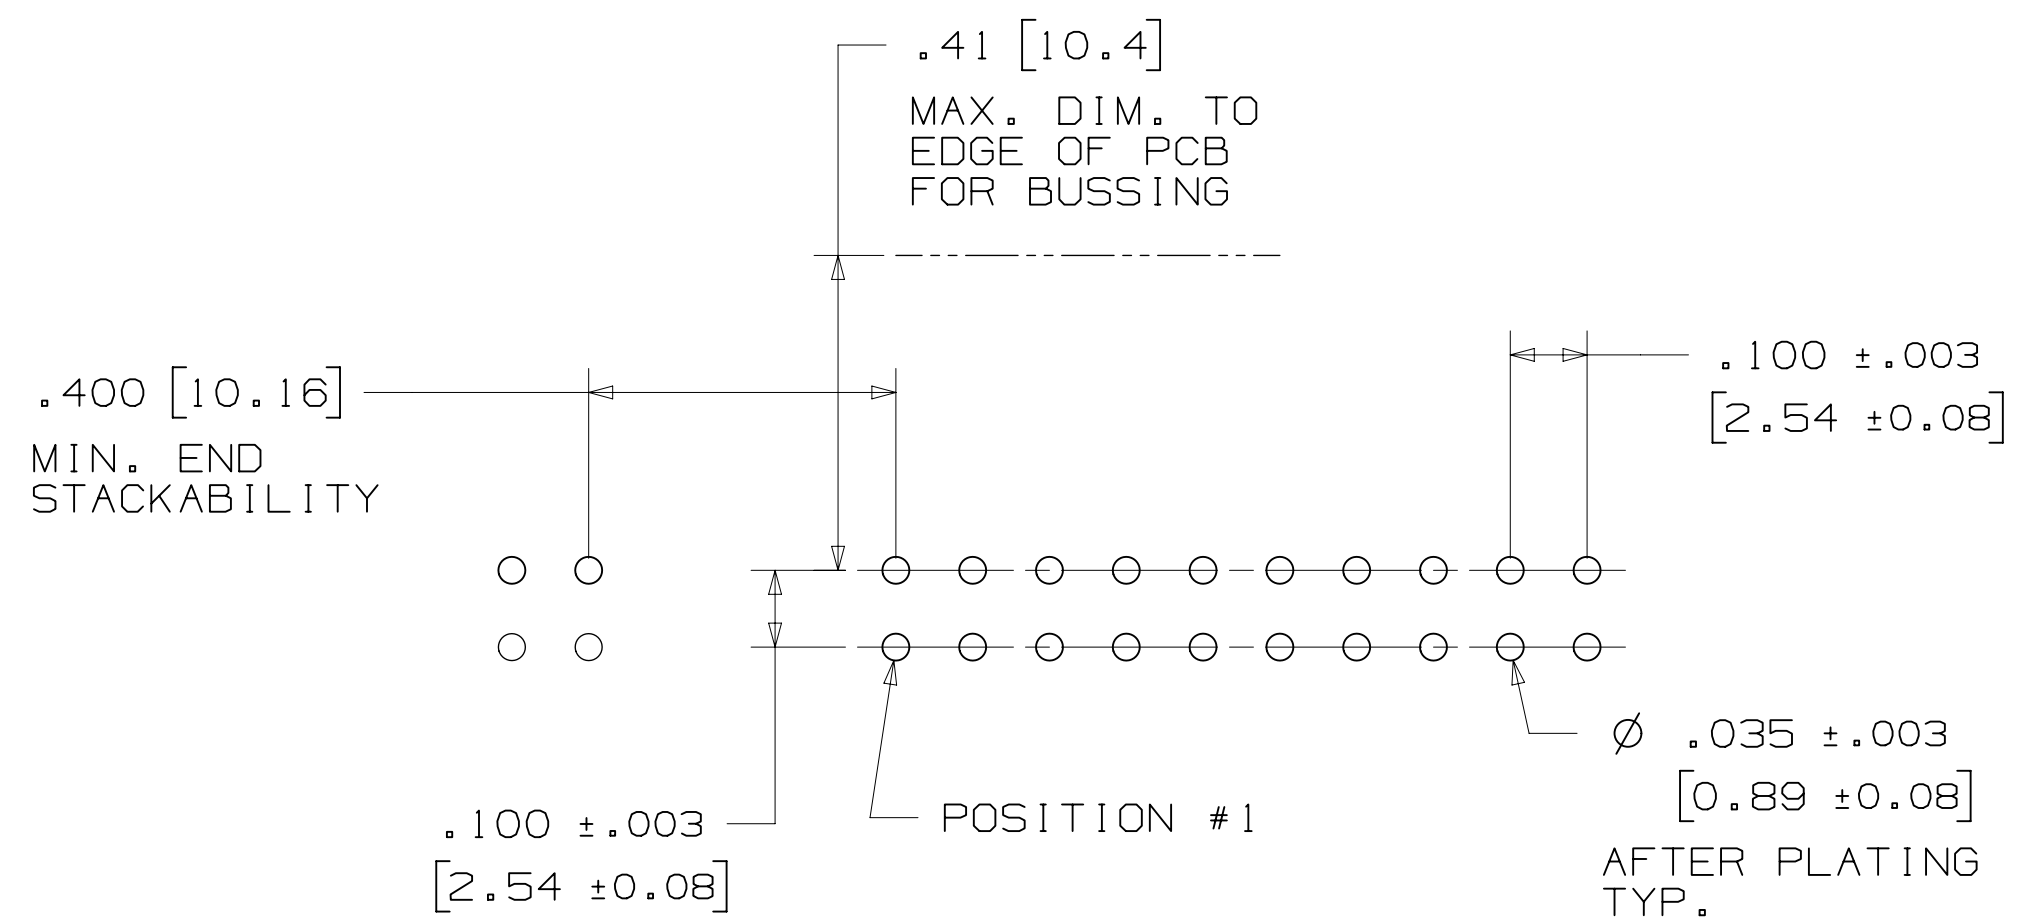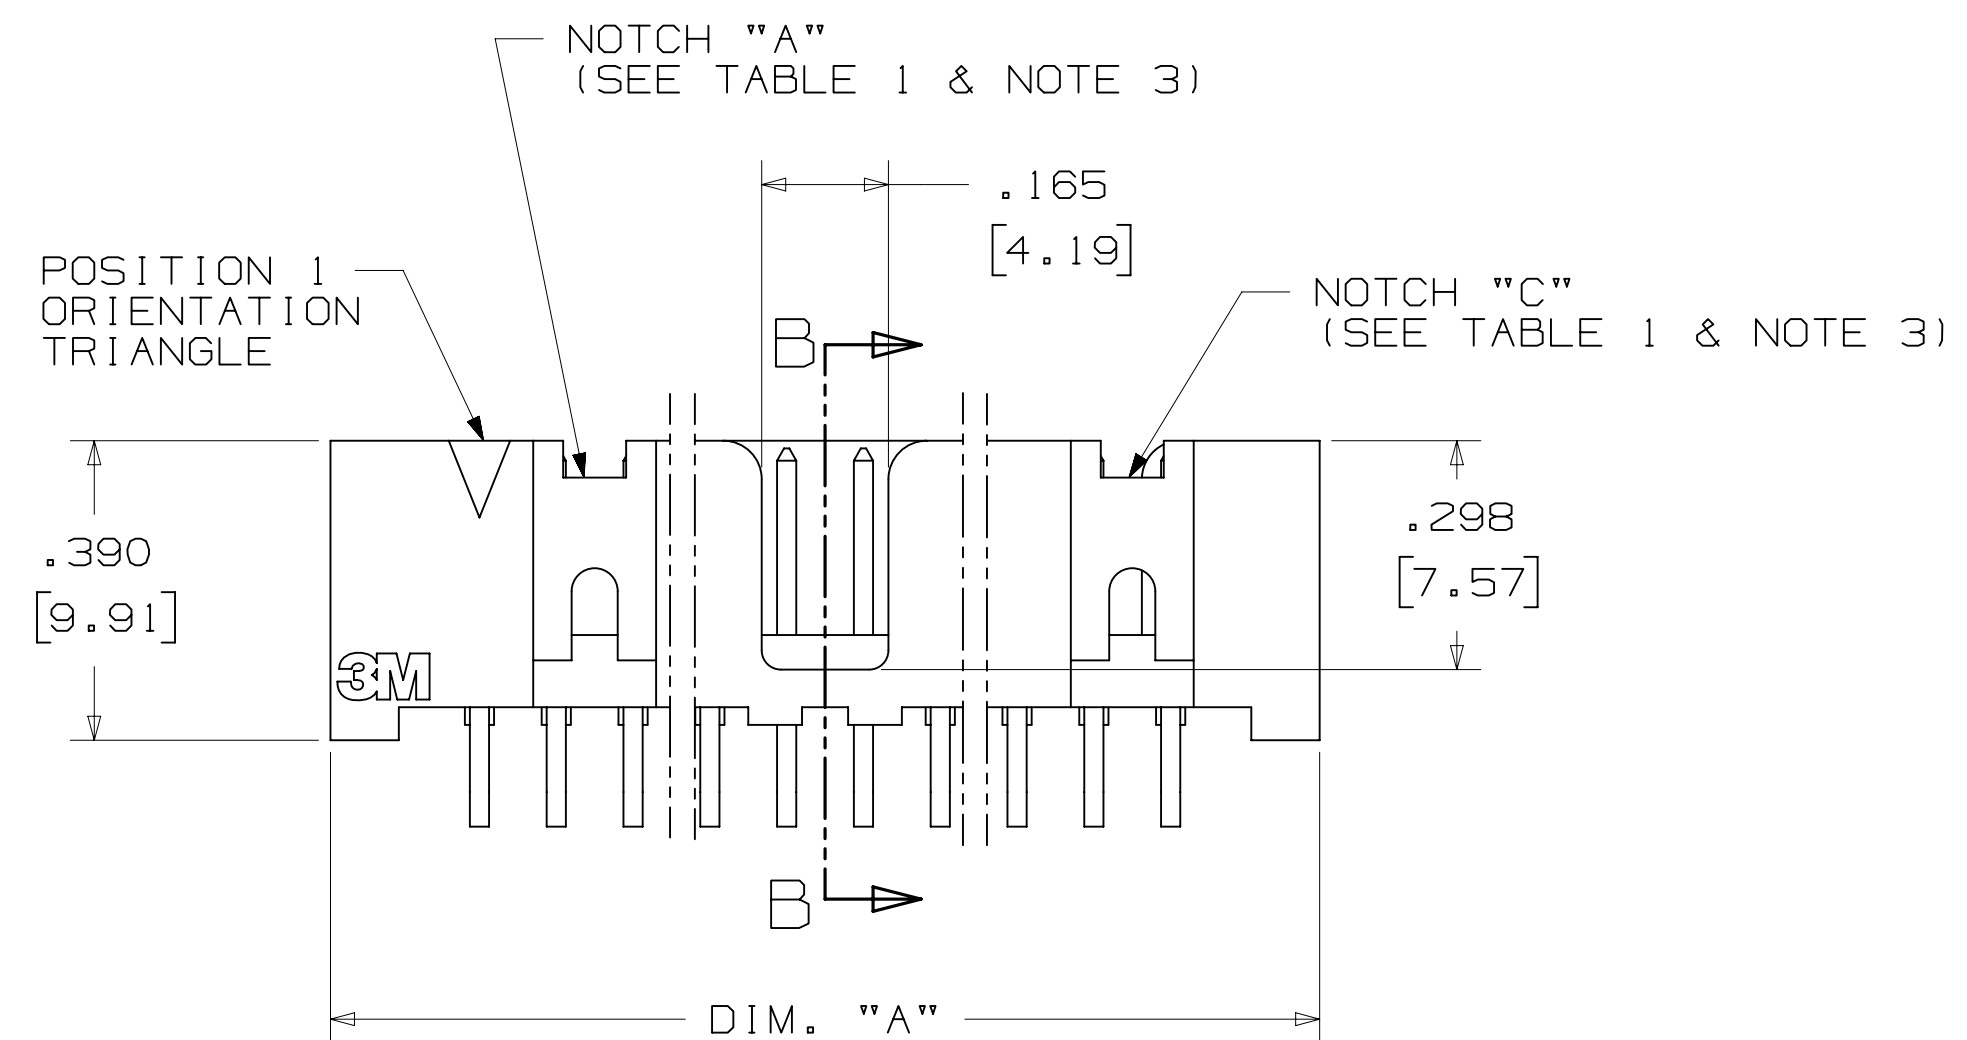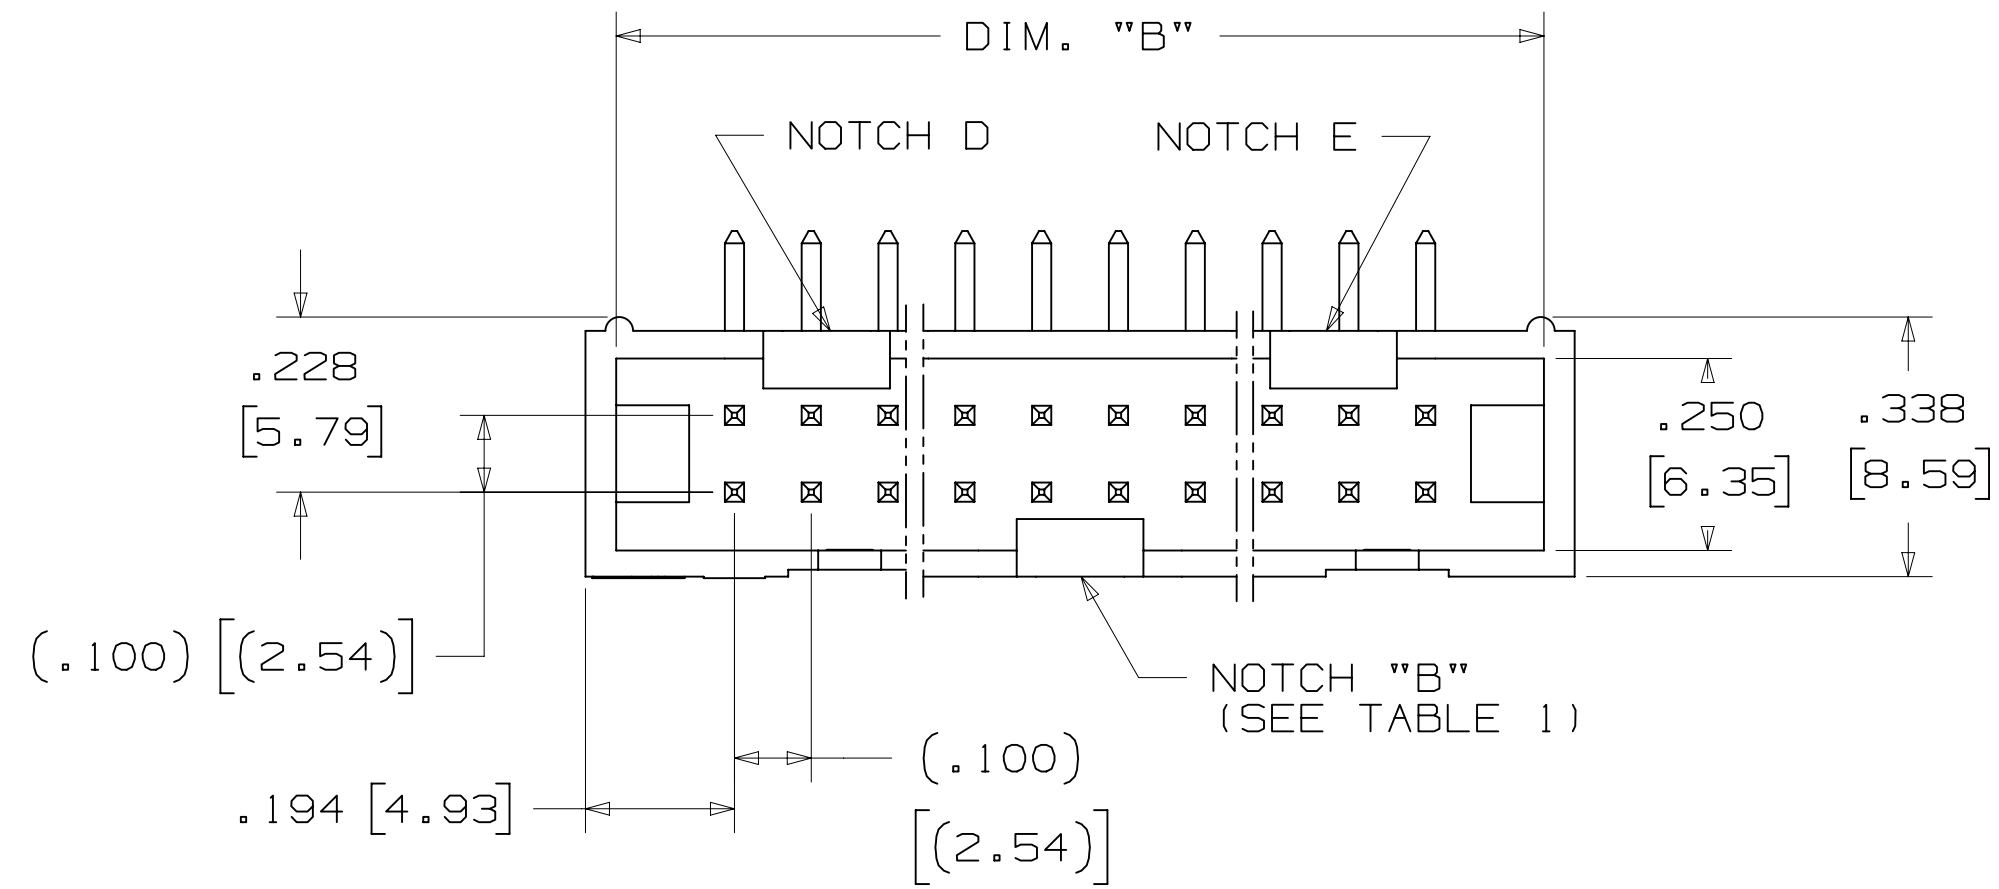

RECOMMENDED HOLE PATTERN
SHOWN FROM COMPONENT SIDE

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRPT	CHKD
ADDEND CODES				DRPT	CAST 1 GL 1 ONE		AUG 11, 2014	DATE	
				CHKD			DATE		
				APPRV. R. SCHERER				DATE SEP 05, 2014	
DIVISION		DIVISION CODE		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2016 This document and the information it contains are 3M property and may not be reproduced or further distributed without written permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
Interconnect Solutions		EMSD		3M					
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED					
		INCHES ±.0000 ±.0005 ±.0000		MILLIMETERS ±.0000 ±.0005 ±.0000					
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 2009		MAX SURFACE ROUGHNESS 1.6 0.8 0.4					
☒ MARKED ONLY				CAGE NUMBER D78-5100-0770-7		DRAWING NO.		REV. N	
				MODEL 2500 SERIES		DET. LISTS		YES X NO SHT 3 OF 5	

3M™ FOUR-WALL HEADER, 2500 SERIES
.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE

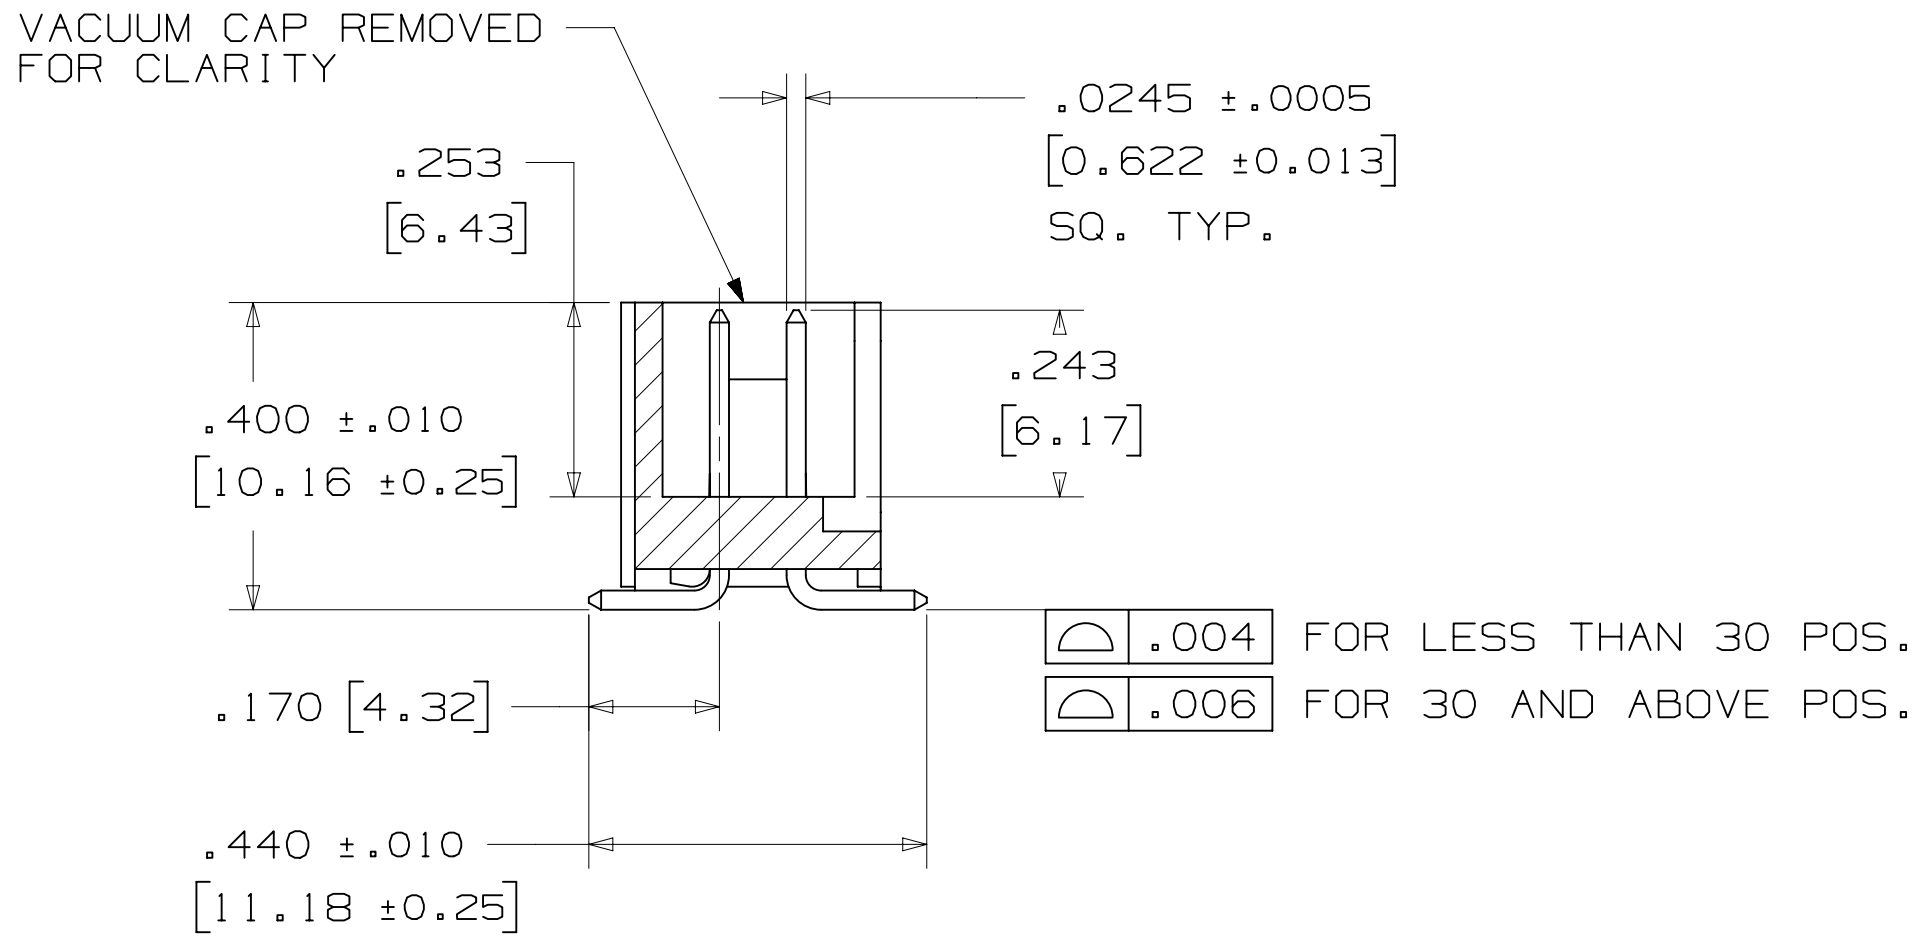

SECTION C - C

TABLE 1					
PIN QTY.	DIM. "A"	DIM. "B"	POLARIZING NOTCHES	TAPE AND REEL PKG CODE	PIN QTY.
06	.588 [14.94]	.508 [12.90]	B	WD (44 MM)	06
08	.688 [17.48]	.608 [15.44]	B	WD (44 MM)	08
10	.788 [20.02]	.708 [17.98]	BC	WD (44 MM)	10
14	.988 [25.10]	.908 [23.06]	BCDE	WD (44 MM)	14
16	1.088 [27.64]	1.008 [25.60]	ABCDE	WD (44 MM)	16
20	1.288 [32.72]	1.208 [30.68]	ABCDE	WE (56 MM)	20
24	1.488 [37.80]	1.408 [35.76]	ABCDE	WE (56 MM)	24
26	1.588 [40.34]	1.508 [38.30]	ABCDE	WE (56 MM)	26
30	1.788 [45.42]	1.708 [43.38]	ABCDE	WF (72 MM)	30
34	1.988 [50.50]	1.908 [48.46]	ABCDE	WF (72 MM)	34
36	2.088 [53.04]	2.008 [51.00]	ABCDE	WG (88 MM)	36
40	2.288 [58.12]	2.208 [56.08]	ABCDE	WG (88 MM)	40
50	2.788 [70.82]	2.708 [68.78]	ABCDE	WG (88 MM)	50
60	3.288 [83.52]	3.208 [81.48]	ABCDE	WH (120 MM)	60
64	3.488 [88.60]	3.408 [86.56]	ABCDE	WH (120 MM)	64

ORDERING INFORMATION
SURFACE MOUNT VERSION



N25XX-6VOC-XX-XX

N = HIGH TEMP BLACK (PCT)
(RB PLATING REQ'D)

PIN QUANTITY:
(SEE TABLE 1)

PACKAGING OPTIONS:
WX = TAPE & REEL PACKAGING (SEE TABLE 1)

PLATING:
RB = 30µ" [0.76µm] AVG. GOLD
200µ" [5.08µm] MATTE TIN (RIA, E1 & C1 APPLY)

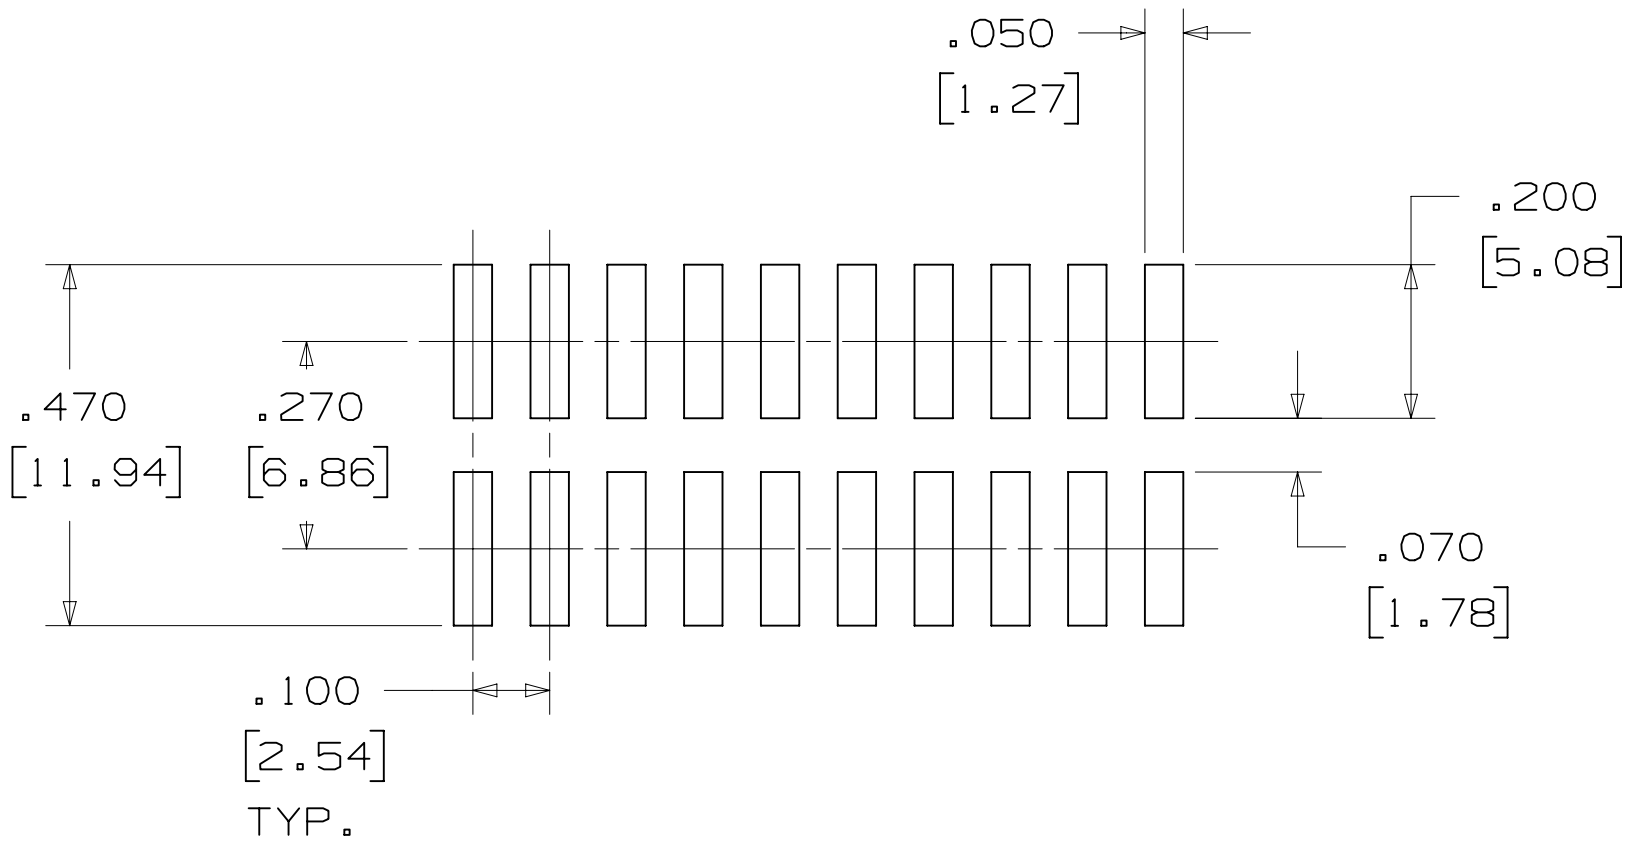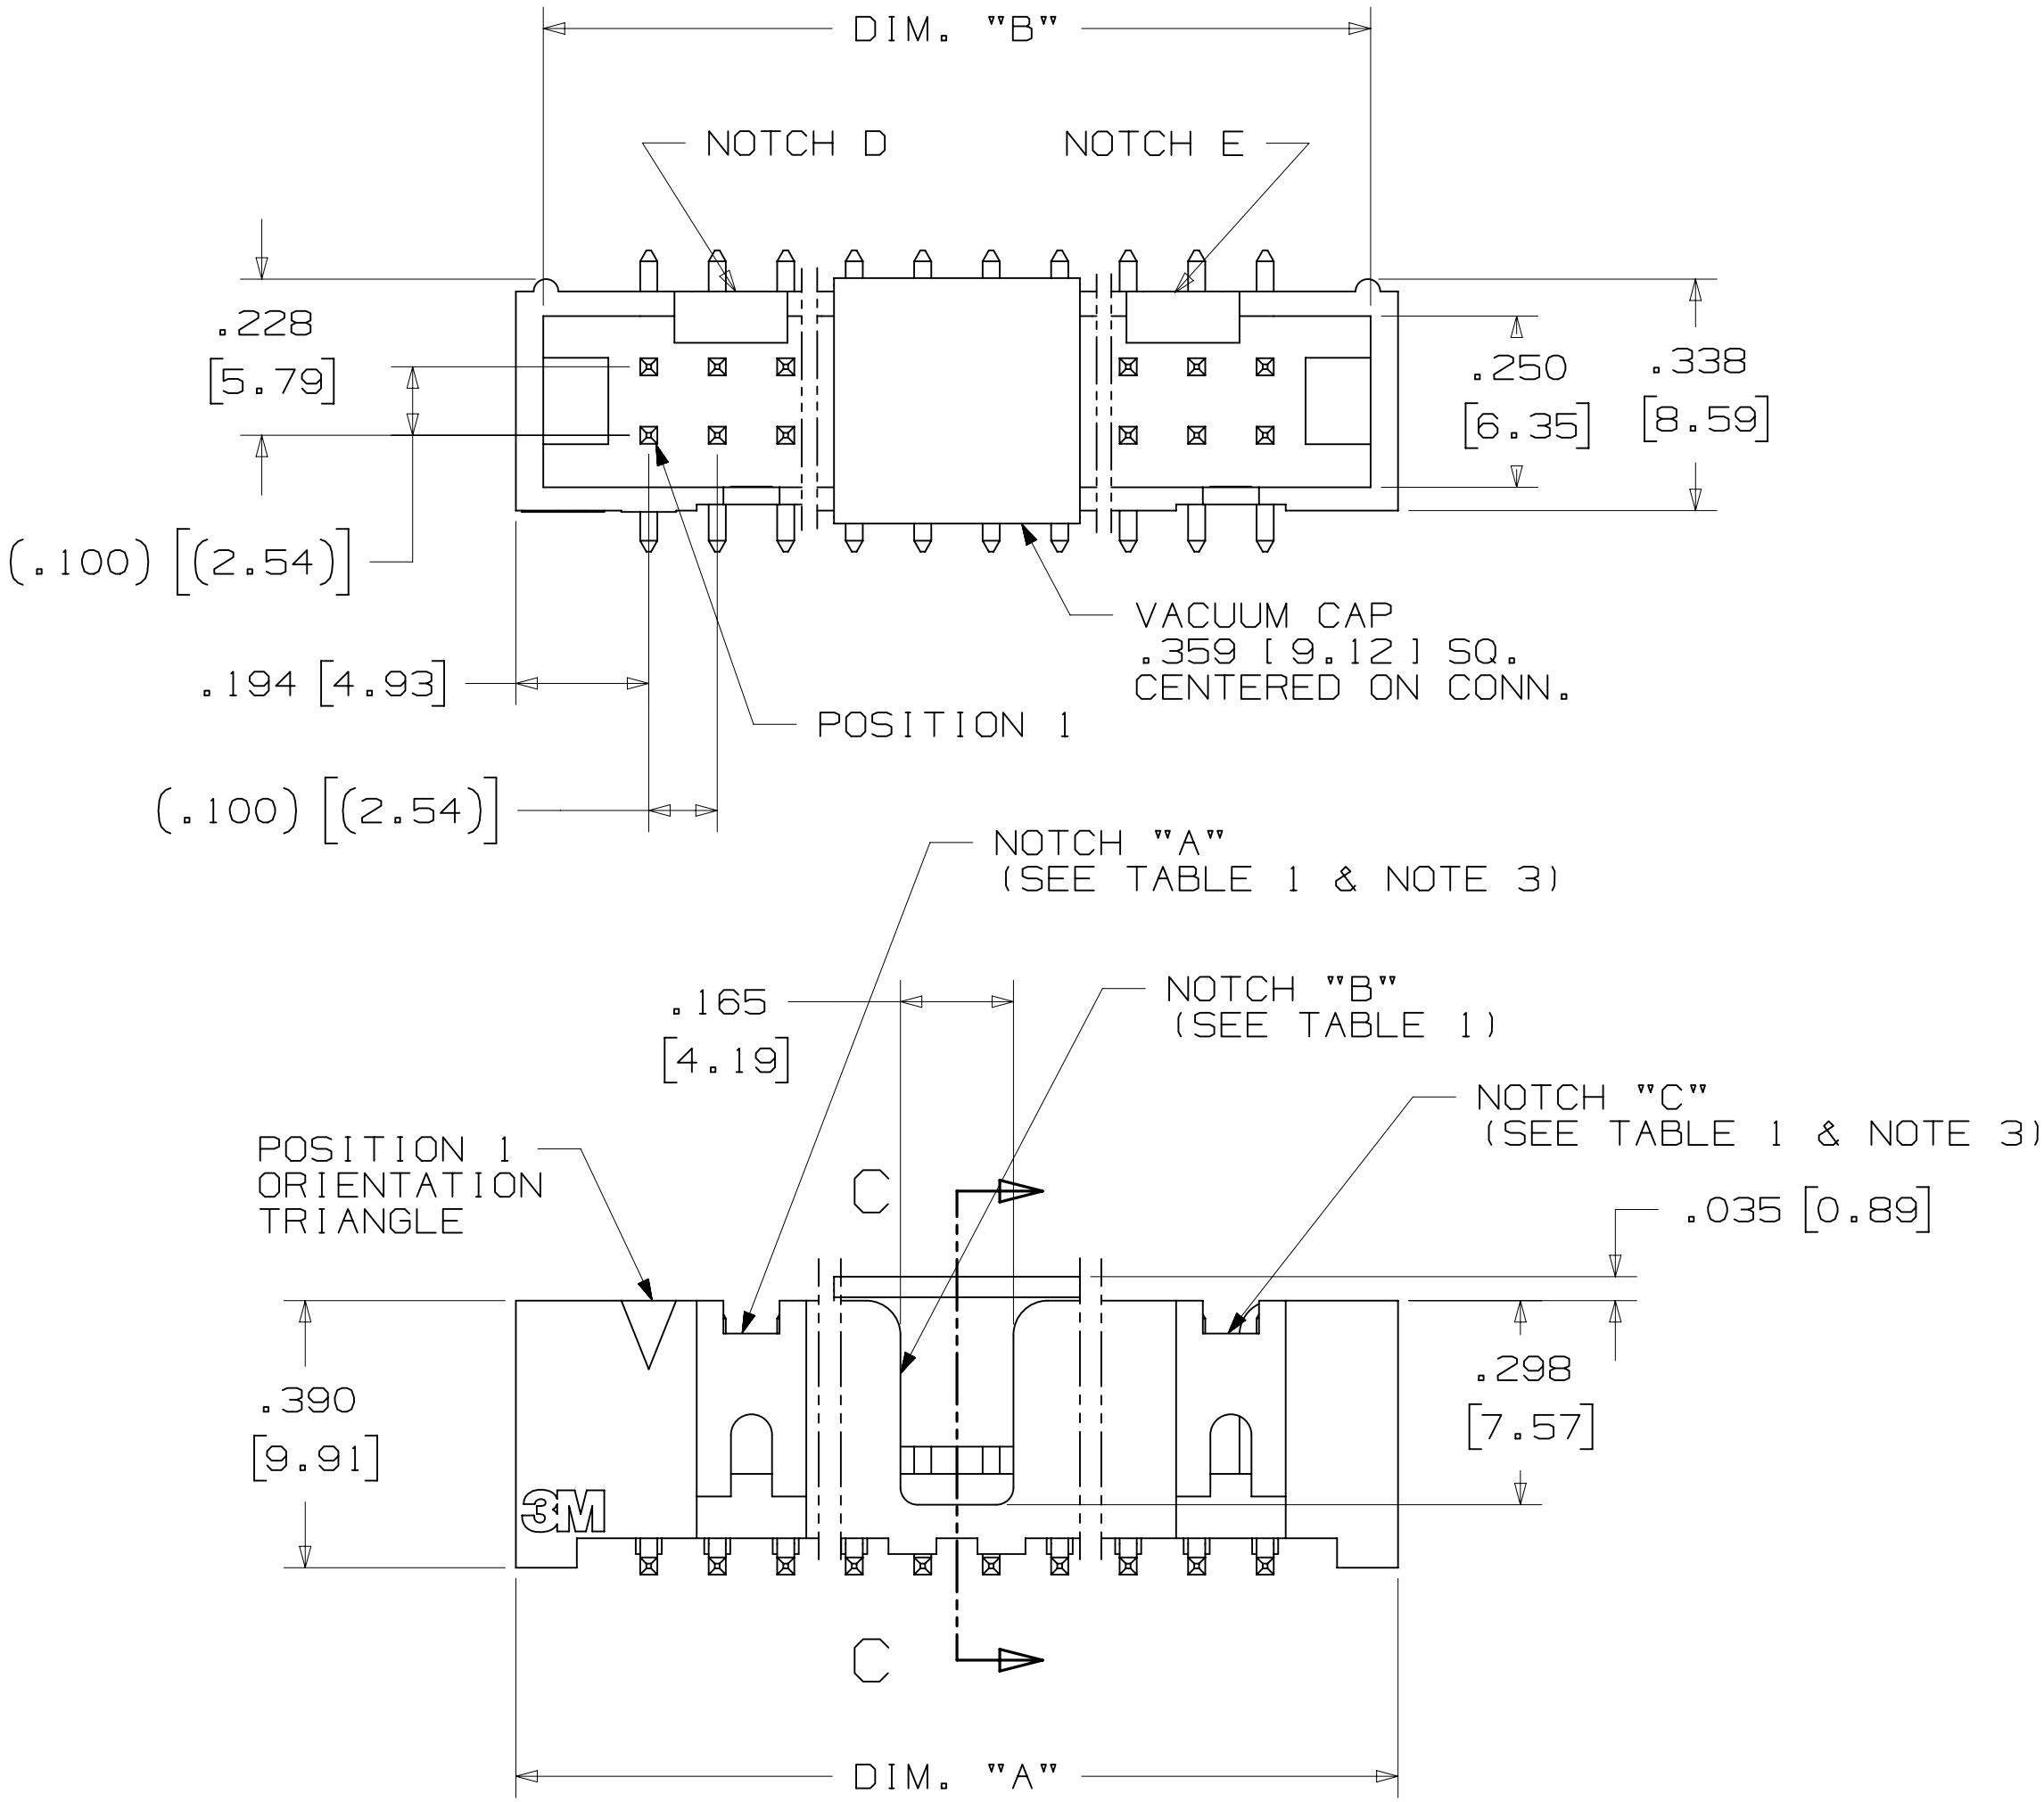

RECOMMENDED PAD LAYOUT

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
XXXX	XXXX	CHKD	CHKD	DATE	DATE	DATE
DIVISION	DIVISION CODE	DRP	CAST	GLONE	DATE	DATE
Interconnect Solutions	EMSD	CHKD	CHKD	DATE	DATE	DATE
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED	INCHES .00 ±.01 .000 ±.005 .0000 ±	MILLIMETERS 0 ±.3 .00 ±.13 .000 ±	ANGLES	
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	MAX SURFACE ROUGHNESS	DET SURFACES	MARKED ONLY		
TITLE		CAGE NUMBER				
HEADER, 4-WALL, LO-PRO, .100 X .100, SMT, STRAIGHT & RA		D78-5100-0770-7				
MODEL		2500 SERIES				
REV.		N				

3M™ FOUR-WALL HEADER, 2500 SERIES

.100" X .100" LOW PROFILE, SURFACE MOUNT, STRAIGHT AND RIGHT ANGLE THROUGH-HOLE


PART CUSTOMIZATION

THIS SPEC SHEET DETAILS OUR STANDARD OFFERING.

3M HAS SEVERAL CAPABILITIES THAT CAN PROVIDE A PART TAILORED TO YOUR SPECIFIC NEEDS. ASK YOUR 3M SALES REPRESENTATIVE OR CUSTOMER SERVICE FOR MORE DETAILS.

- ```
* SELECTIVE PIN REMOVAL (FOR BOARD ASSEMBLY POLARIZATION).
* DIFFERENT PIN LENGTHS.
```


## POLARIZING KEY

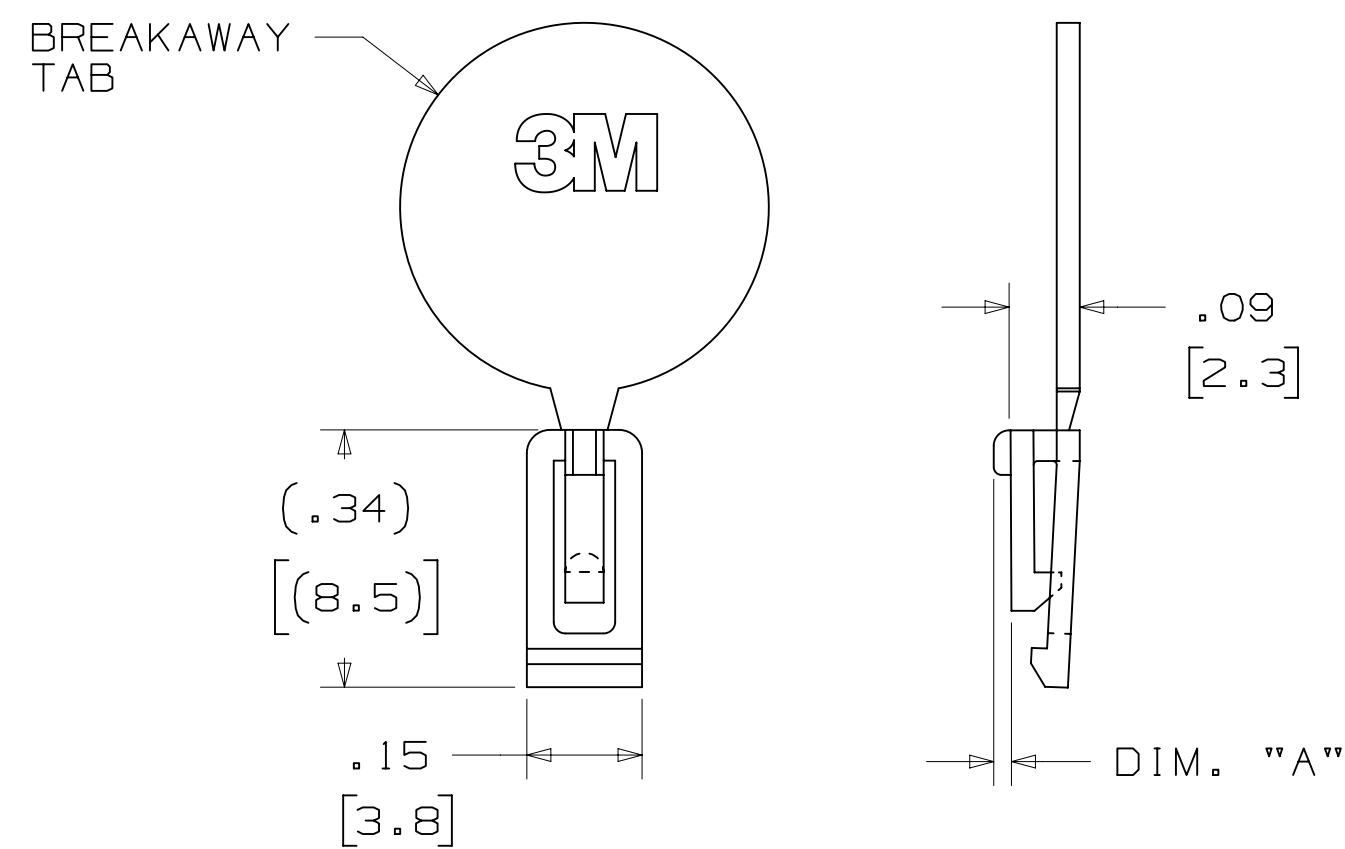

|             |          |       |          |
|-------------|----------|-------|----------|
| 3M PART NO. | MATERIAL | COLOR | DIM. "A" |
| N3518       | LCP      | BLACK | .02      |

NOTE:  
#2216 B/A SCOTCHWELD CAN BE USED TO  
ADHERE KEYS.


## LOW PROFILE LATCH

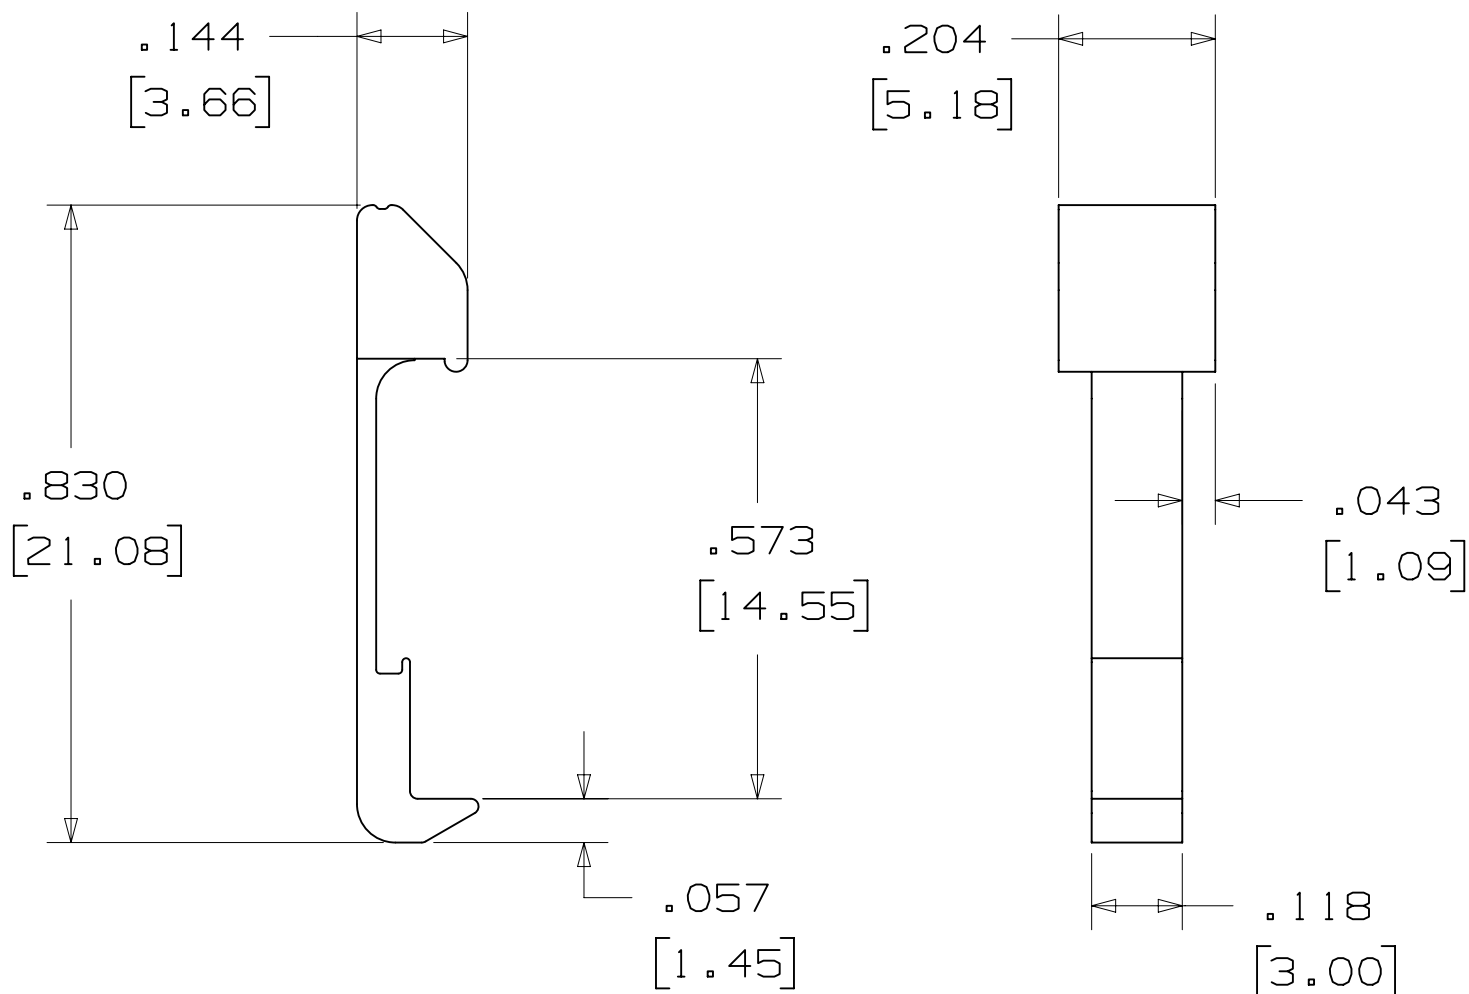

|          |          |       |
|----------|----------|-------|
| PART NO. | MATERIAL | COLOR |
| 3505-33B | NYLON    | BLACK |


NOTE:  
LATCHES NOT COMPATIBLE WITH REFLOW SOLDERING.  
ATTACH LATCHES AFTER SOLDERING.

## POLARIZING POST

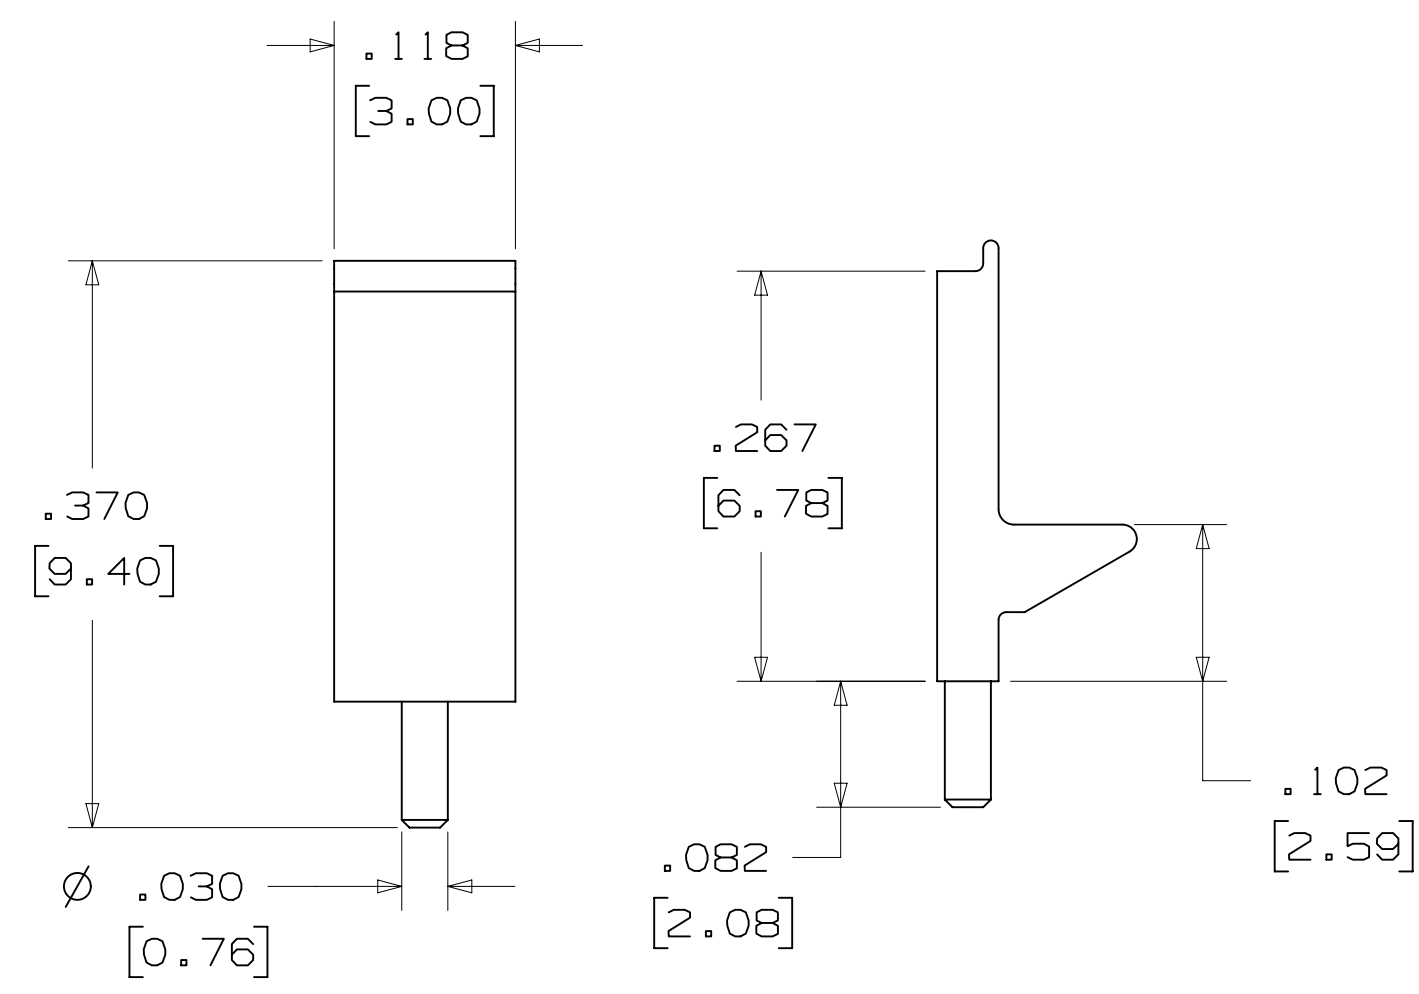

|          |          |       |
|----------|----------|-------|
| PART NO. | MATERIAL | COLOR |
| 3201-3   | PCT      | BLACK |

# SHORT/LONG SOCKET RETAINER CLIP

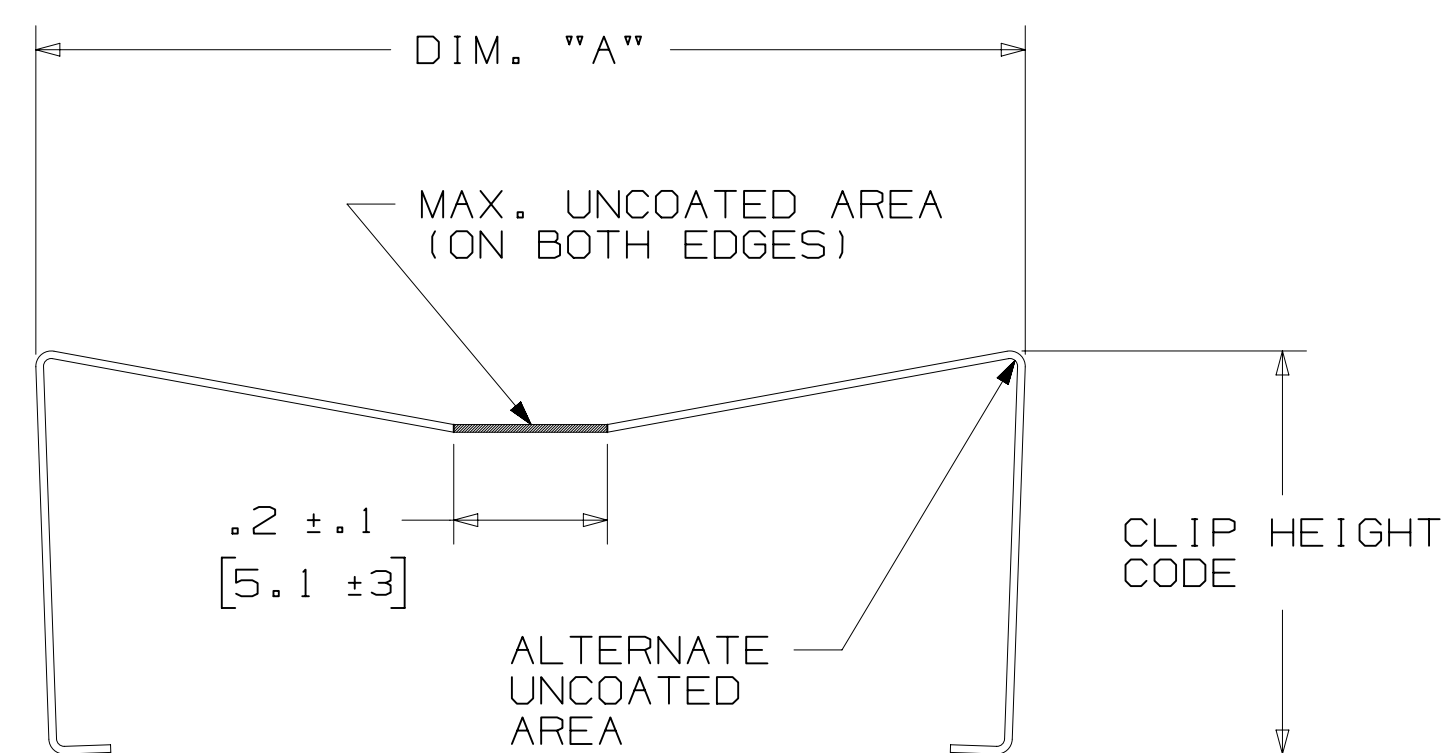


| PIN | QTY. | DIM. "A"      |
|-----|------|---------------|
| 06  |      | N/A           |
| 08  |      | N/A           |
| 10  |      | .81 [ 20.6 ]  |
| 14  |      | 1.02 [ 25.9 ] |
| 16  |      | 1.12 [ 28.4 ] |
| 20  |      | 1.32 [ 33.5 ] |
| 24  |      | 1.52 [ 38.7 ] |
| 26  |      | 1.63 [ 41.4 ] |
| 30  |      | 1.83 [ 46.4 ] |
| 34  |      | 2.03 [ 51.6 ] |
| 36  |      | N/A           |
| 40  |      | 2.33 [ 59.2 ] |
| 50  |      | 2.83 [ 71.9 ] |
| 60  |      | 3.33 [ 84.6 ] |
| 64  |      | 3.53 [ 89.7 ] |

NOTE:  
STAINLESS STEEL WITH GRAY POLYURETHANE COATING.

3505-8XXX

CLIP HEIGHT CODE \_\_\_\_\_ PIN COUNT \_\_\_\_\_  
 0 = .31 [ 7.9 ] FOR SOCKETS (SEE TABLE)  
 WITHOUT STRAIN RELIEF  
 1 = .53 [ 13.5 ] FOR SOCKETS  
 WITH STRAIN RELIEF

NOTE:  
1) THE FOLLOWING RETAINER CLIPS HAVE BEEN DISCONTINUED:  
3505-8064  
3505-8124  
3505-8150

| DESIGN REFERENCE                                                                                                    | NEXT ASSEMBLY | REV                                                                     | ECO | ISSUE DATE AND DESCRIPTION                                                                                                                                                                                                                               | DRFT | CHKD         |
|---------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|--------------|
| ACROSS CODES                                                                                                        |               | DRFT                                                                    | CAS | IGL                                                                                                                                                                                                                                                      | ONE  |              |
|                                                                                                                     |               | DATE                                                                    | AUG | 11, 2014                                                                                                                                                                                                                                                 | MFG  | DATE         |
|                                                                                                                     |               | CHKD                                                                    | R.  | SCHERER                                                                                                                                                                                                                                                  | DATE | SEP 05, 2014 |
| DIVISION                                                                                                            |               | DIVISION CODE                                                           |     |                                                                                                                                                                                                                                                          |      |              |
| Interconnect Solutions                                                                                              |               | EMSD                                                                    |     |                                                                                                                                                                                                                                                          |      |              |
| DO NOT SCALE                                                                                                        | SCALE 4 1     | TOLERANCES EXCEPT AS NOTED                                              |     | <p>© 3M COPYRIGHT 2016</p> <p>This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.</p> |      |              |
| DRAWING                                                                                                             |               |                                                                         |     |                                                                                                                                                                                                                                                          |      |              |
|  <p>THIRD ANGLE PROJECTION</p> |               | <p>INCHES</p> <p>0.0 ± .01</p> <p>0.000 ± .005</p> <p>0.000 ± .0000</p> |     | <p>TITLE</p> <p>HEADER, 4-WALL, LO-PRO, .100 X .100, SMT, STRAIGHT &amp; RA</p>                                                                                                                                                                          |      |              |
| <p>INTERPRET PER ASME Y14.5 - 2009</p>                                                                              |               | <p>MILLIMETERS</p> <p>0 ± .3</p> <p>0.00 ± .13</p> <p>0.000 ± .000</p>  |     |                                                                                                                                                                                                                                                          |      |              |
| <p>MAX SURFACE ROUGHNESS</p> <p>12.5 μm SURFACES</p> <p>6.3 μm MARKED ONLY</p>                                      |               | <p>CAGE NUMBER</p> <p>SIZE</p> <p>D 78-5100-0770-7</p>                  |     | <p>REV.</p> <p>N</p>                                                                                                                                                                                                                                     |      |              |
| <p>MODEL</p> <p>2500 SERIES</p>                                                                                     |               | <p>DET.</p> <p>ISTS</p> <p>YES X NO</p>                                 |     | <p>SHT 5 OF 5</p>                                                                                                                                                                                                                                        |      |              |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

3M:

[2534-6003UB](#) [2520-5003UG](#) [2526-5003UB](#) [2540-60K2UG](#) [2560-5003UB](#) [2564-6003UB](#) [3505-8060](#) [3505-8064](#)  
[3505-8130](#) [3505-8150](#) [N2520-6003UB](#) [3505-8024](#) [N2516-5002UB](#) [N2516-60K2UB](#) [N2520-6002UG](#) [N2520-60K2UG](#)  
[N2526-7002UG](#) [N2530-6002UB](#) [N2534-5002UB](#) [N2534-6003UB](#) [N2540-6002UB](#) [N2550-5002UB](#) [N2550-6002UG](#)  
[N2550-6003UB](#) [N2510-50K2RB](#) [N2510-5002UB](#) [N2510-5003RB](#) [N2510-60K2RB](#) [N2510-6002UB](#) [N2510-6002UG](#)  
[N2510-6003RB](#) [N2510-7002UG](#) [N2510-7003UG](#) [N2514-5002UB](#) [N2514-5003RB](#) [N2514-6003RB](#) [N2516-50K2RB](#)  
[N2516-5003RB](#) [N2516-6003RB](#) [N2520-50K2RB](#) [N2520-5003RB](#) [N2520-6003RB](#) [N2524-6002UB](#) [N2524-6003RB](#)  
[N2526-50K2RB](#) [N2526-6002UB](#) [N2530-5003RB](#) [N2530-60K2RB](#) [N2530-6003RB](#) [N2530-6003UB](#) [N2534-5003RB](#)  
[N2534-6002UB](#) [N2534-6003RB](#) [N2540-5002UB](#) [N2540-5003RB](#) [N2540-60K2RB](#) [N2540-6003RB](#) [N2540-7002UG](#)  
[N2550-60K2RB](#) [N2550-6002UB](#) [N2550-6003RB](#) [N2564-60K2RB](#) [2540-60K2UB](#) [N3518](#) [N2530-50K2RB](#) [2540-](#)  
[6002UG](#) [N2550-5002RB](#) [N2540-5002RB](#) [2560-6003UB](#) [N2560-6003RB](#) [2526-6003RB](#) [2516-6005EB](#) [N2520-](#)  
[5003UB](#) [N2510-60K2-UB](#) [N2514-60K2-RB](#) [N2516-60K2-RB](#) [N2524-5002-UB](#) [N2524-5003-RB](#) [N2526-5003-RB](#)  
[N2526-60K2-RB](#) [N2540-5003-UB](#) [N2550-50K2-RB](#) [N2520-60K2-RB](#) [N2516-6003-UG](#) [N2526-6002-UG](#) [N2536-5002-](#)  
[RB](#) [N2510-5002-UG](#) [2510-60K2-UG](#) [N2516-6003-UB](#) [N2534-6002-UG](#) [N2530-6002RB](#) [N2526-5002RB](#) [2524-](#)  
[6002UB](#) [N2510-6V0C-RB-WD](#) [N2514-6V0C-RB-WD](#) [N2516-6V0C-RB-WD](#) [N2520-6V0C-RB-WE](#) [N2524-6V0C-RB-](#)  
[WE](#) [N2526-6V0C-RB-WF](#) [N2530-6V0C-RB-WF](#)