

LOC	DIST	REVISIONS				
AJ	16	P	LTR	DESCRIPTION	DATE	DWN
			A	REVISED PER EC OS14-0150-05	01SEP05	BM

- 1

ZINC PER QQ-Z-363
- 2

BERYLLIUM COPPER PER ASTM-B-196
- 3



PTFE PER MIL-P-19468
- 4

GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 5

TIN PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 6

SEE INSTRUCTION SHEET 408-9889.
- 7

NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.

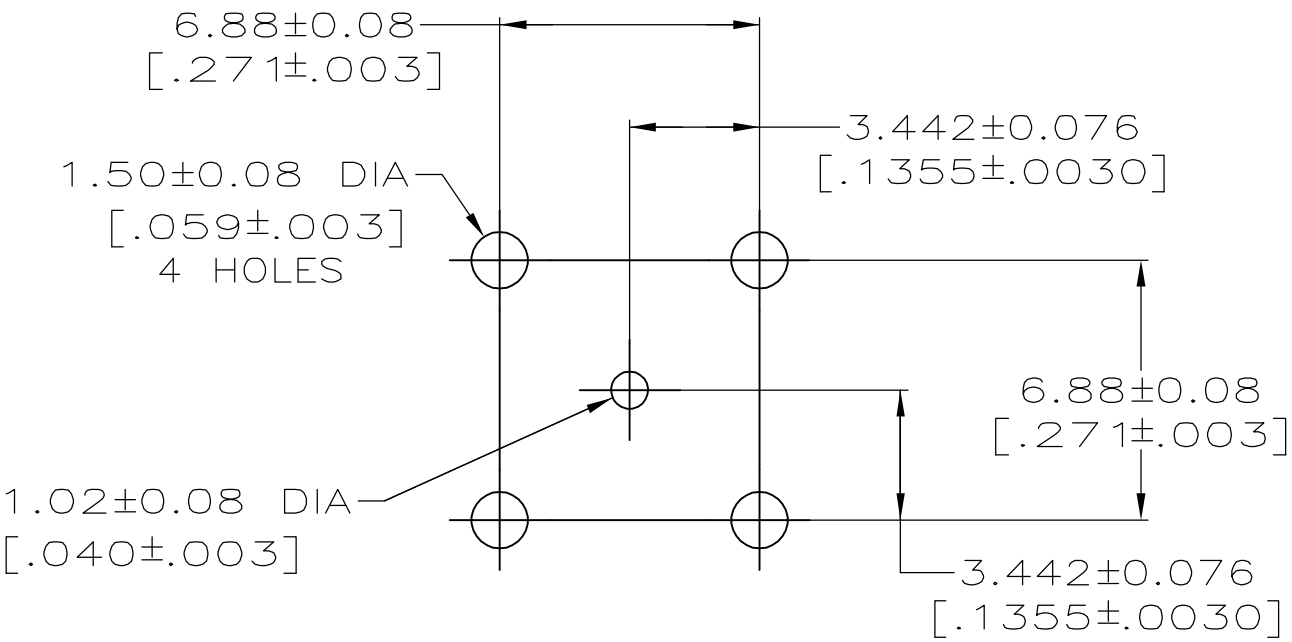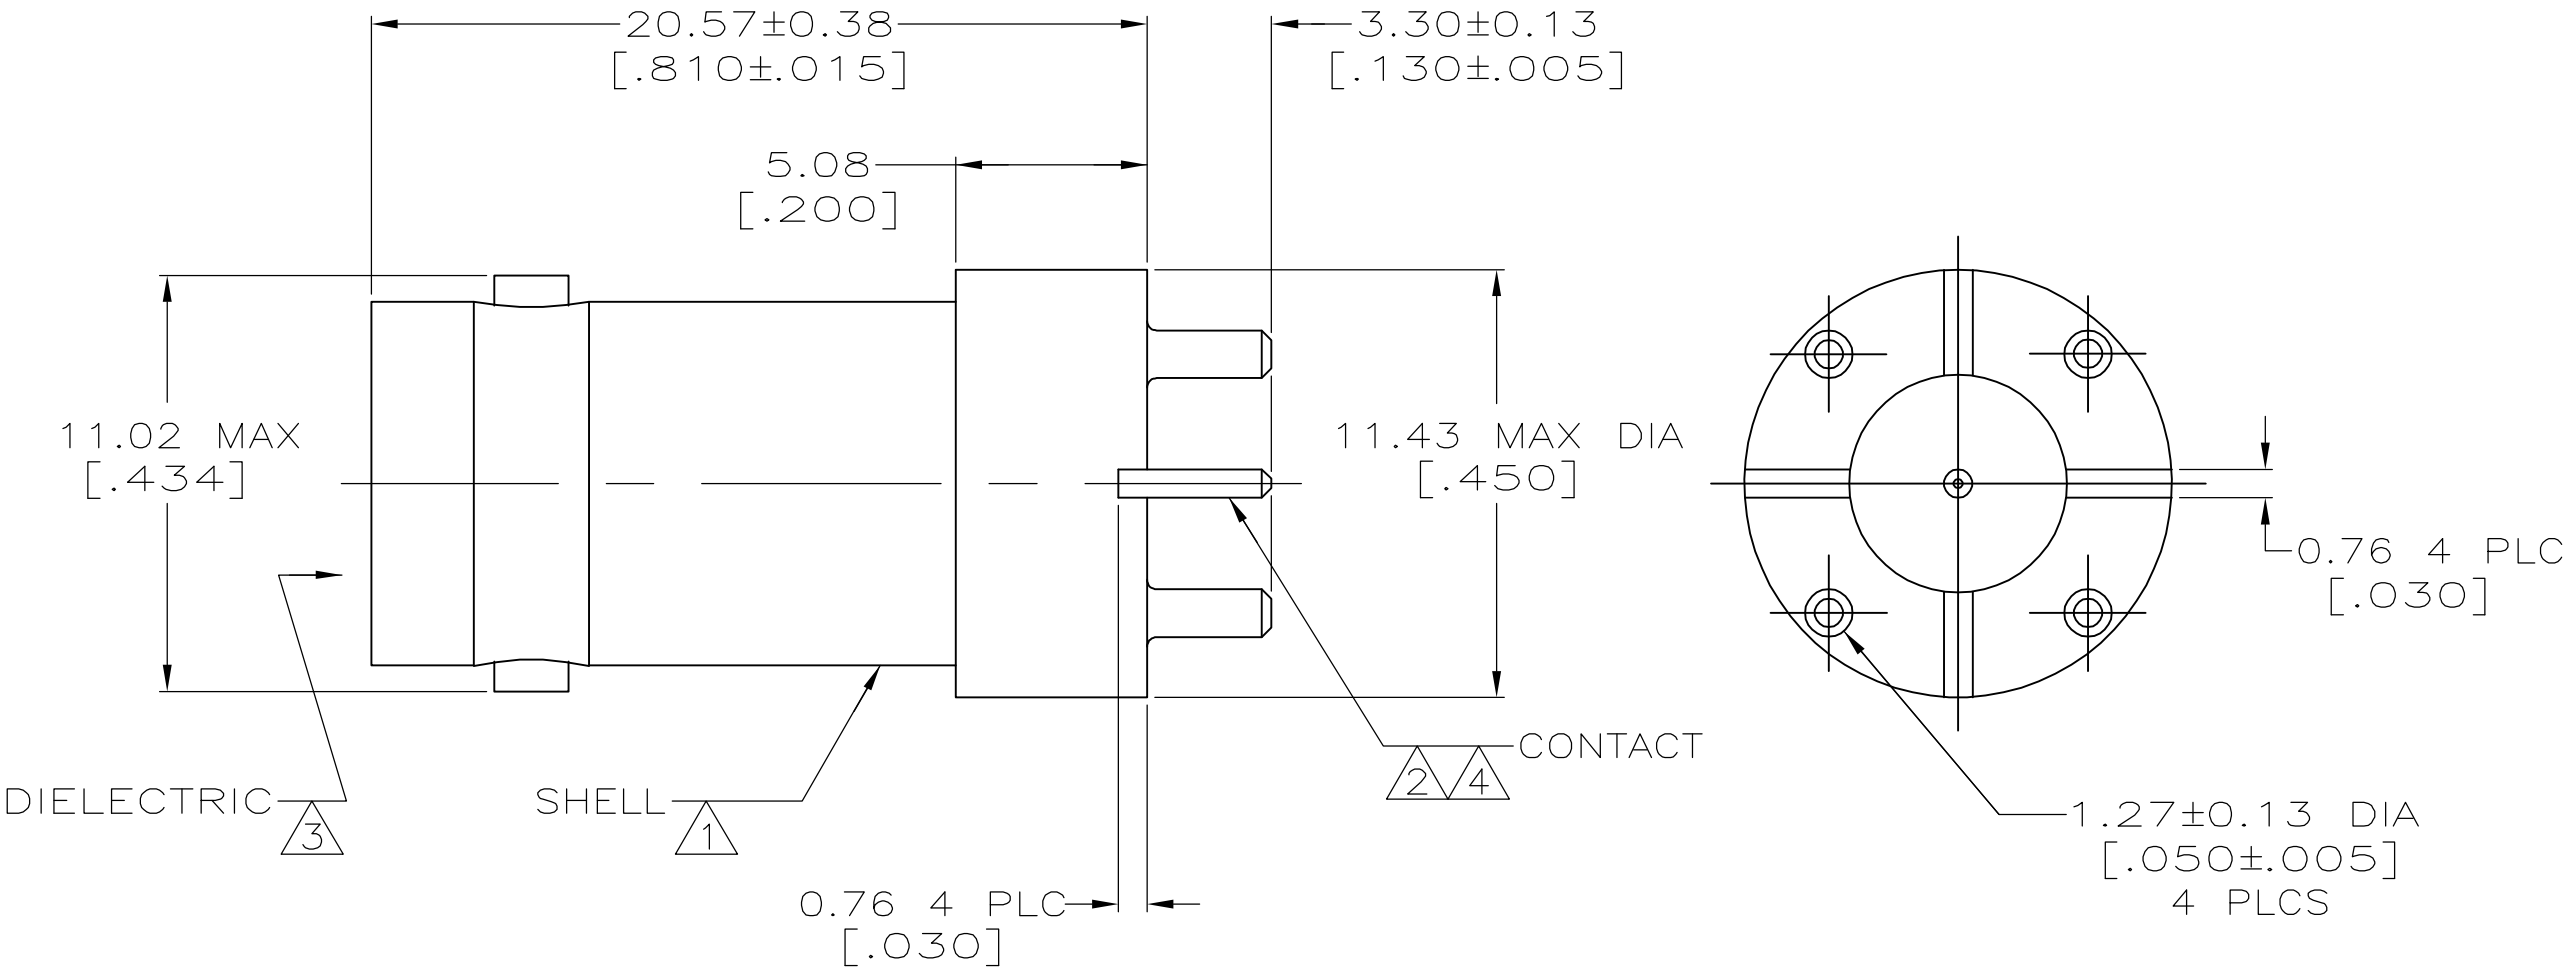

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. VARELA - 02FEB2005	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: INCHES		CHK J. HAVENER 02FEB2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. LIPPERT 02FEB2005	NAME JACK, VERTICAL, PCB, 75 OHM, COMMERCIAL BNC			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC 108-12078	SIZE A2			
	FINISH	WEIGHT -	CAGE CODE 00779	DRAWING NO C=6274291	RESTRICTED TO -	
MATERIAL SEE NOTES 1 - 3		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV A