



## FIELD OF USE :

The MS-917 has been designed in accordance with EN 61243-3 and EN 50110-1 standards. Voltage detector and multitester which checks the absence of voltage (AC and DC).

## CARACTERISTIQUES :

- Indicates the voltage level from 12 to 690 V AC or DC.
- Checks the polarity.
- Search of phase and neutral.
- Checks the continuity (200Ω) with a pushbutton.
- IP2X safety probes with retractable shrouded plugs in accordance with UTE C18-510.
- Frequencies : 50-60 Hz ± 10%.
- Rating temperatures : - 10°C à + 55°C.
- IP65 / IK06.
- Class II.
- In accordance with IEC 61010-031 (leads plugs).
- Category IV - 600V in accordance with IEC-61010-1.
- Weight : 215 g.
- Dimensions : 165 x 48 x 40 mm.
- Batteries : 2 x AAA

## REFERENCES :

MS-917	Multitester with batteries and without carrying bag.
	Packaging : Blister
<b>ACCESSORIES</b>	
M-87369	carrying bag with ring for belt.
M-952325	Holder




**3 configurations are possible for connecting leads.**



**Plug in position**



**M-87369**

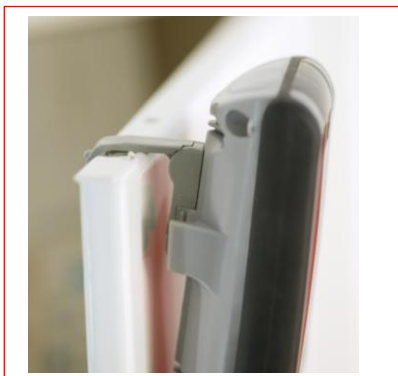

**Holder M-952325**