



Bestückungsplan / contact layout

■ bestückt / assembled

32 30 28 26 24 22 20 18 16 14 12 10 8 6 4 2

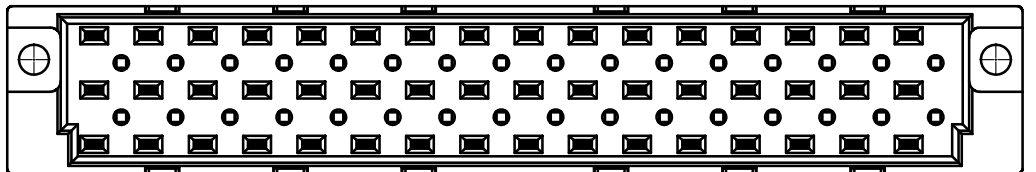

Leiterplatten-Lochbild / PCB drillhole pattern

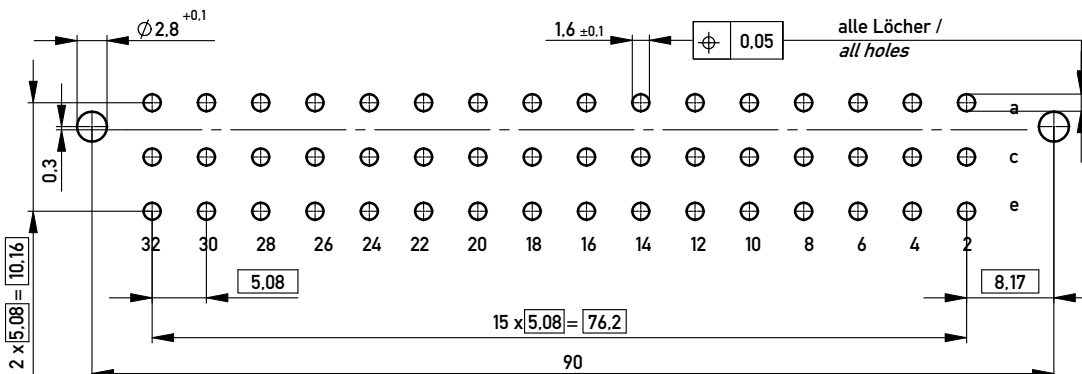

Lötanschluß 1,0 x 1,0 mm / solder terminal 1,0 x 1,0 mm

Isolierwerkstoff / housing material: PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

Copyright by ERNI GmbH.
Proprietary notice pursuant to ISO 16106 to be observed.

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
Subject to modification without prior notice. Drawing will not be updated.				Federleiste E 48 Löt Fem. Connector E 48 Solder	
-		www.ERNI.com		354260 I A3	
Index	01.07.2008	Date		Class	
				STVE	