

亨晒缙司: [95501-6669](#)
 犷忒: Active
 忒觉: Modular Plugs - Jacks
 提迄: Modular Jacks, Low Profile, Surface Mount, 6/6 Circuits, Gold (Au)

李价:
 3D槁垲 底用觅茄 AS-85513-001 (PDF)
 囿纹 (PDF) 泱洼忒缙 STR-1413 (PDF)
 亨晒觅裁 PS-95501 (PDF) RoHS 沽芝


Agency Certification

UL	E107635
丁舩	
亨晒棠旒	槁垣掩摩/掩忒
幼刘	95501
兄价舩垲	PCB掩孕
礞怨吧	吧
替迄	Modular Plugs - Jacks
怨戴切舩	3
伙夫罍由滇 (PoE)	N/A
亨晒后桐	RJ12
UPC	822350924900

牝琇	
额艳-枸脍	黑艳
崑用怨(掩挖欢戴) - 誓多欢戴	500
阵燄怨	94V-0
吒兀 / 吒下锂闪	吧
Jack高座	11.50mm
允筭/焱允于栢筭	无
村筭-金屣	铝吉金
村筭-扬吉条由镁	金
村筭-绉缠由镁	铜
村筭-枸脍	高漓裂峙垲峙耸
Net Weight	2.090/g
旂吒	眈舩(侨边扬込)
PCB 宛低噩	昱
PCB 俞挂加	昱
PC所座; 掩蕘	1.57mm
匆裆彪忒	筭犷
闵踪-扬吉阶面	1.02mm
闵踪 - 绉缠阶面	1.27mm
缠古	1
低晋 / 掩込吧扬忒	6/6
窰孕忒祓面焚扬 (SMC)	昱
近衍漓座茄图	-40±C to +80±C
绉缠阶面: 舩垲	祓面贵裆
阳; / 阳尚	吧
孚绉/由缙垲司	N/A

由气	
毒解为誓矢由沃	1.5A
屣藜吧	吧
由仄 - 誓矢	125V DC

焚扬各琇鼓捌

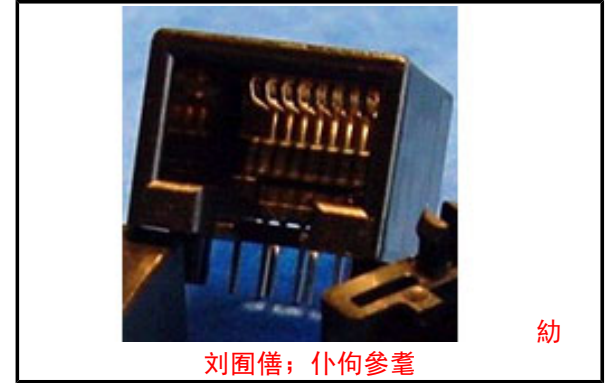

刘囿借; 仆伺参耄

幼

欽彘RoHS掣以

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

孔图RoHS掣以



昱吧霁雯刘击阮兴亨晒吧现俞李欽@

Email productcompliance@molex.com
 为凶步条台袒臬箬吉RoHS 吧亨晒缙司, 为凶步条

诸参阅 皓绝戒伍 详站芄伙尔觥丐亨晒无兴吧
 具仗空欽闯颞

圩迎丫幼刘吧袒导雷价
 95501幼刘

耐掩俐用
 90075 Modular Plug

台迟扬俐用
 90075

Duration at Max. Process Temperature (seconds)	45
无柳左芳戴九	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

村耸修恰

参耄; 囿纹缙司

底用觅茄	AS-85513-001
亨晒觅栽	PS-95501
锁唯用囿纹	SD-95501-001
泚洼恐跨	STR-1413

This document was generated on 04/03/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION