

**Ordering number C12480_MIRELLA-50-S-PIN**

Family	Mirella	FWHM	14 degrees
Type	Reflector	Efficiency	87 %
LED	LUXEON M	cd/lm	7.890
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Pin		
Status	Ready		

Please note that the position pin holes come very close to the L

**Ordering number CN12486_MIRELLA-50-S-PIN-DL**

Family	Mirella	FWHM	18 degrees
Type	Pack	Efficiency	83 %
LED	LUXEON M	cd/lm	3.900
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Pin		
Status	Ready		

Please note that the position pin holes come very close to the L

**Ordering number C12481_MIRELLA-50-M-PIN**

Family	Mirella	FWHM	24 degrees
Type	Reflector	Efficiency	87 %
LED	LUXEON M	cd/lm	2.630
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Pin		
Status	Ready		

Please note that the position pin holes come very close to the L

**Ordering number CN12487_MIRELLA-50-M-PIN-DL**

Family	Mirella	FWHM	38 degrees
Type	Pack	Efficiency	81 %
LED	LUXEON M	cd/lm	1.500
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Pin		
Status	Ready		

Please note that the position pin holes come very close to the L

**Ordering number C12482_MIRELLA-50-W-PIN**

Family	Mirella	FWHM	39 degrees
Type	Reflector	Efficiency	87 %
LED	LUXEON M	cd/lm	1.400
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Pin		
Status	Ready		

Please note that the position pin holes come very close to the L

Ordering number CN12488_MIRELLA-50-W-PIN-DL

Family	Mirella	FWHM	54 degrees
Type	Pack	Efficiency	80 %
LED	LUXEON M	cd/lm	0.980
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Pin		
Status	Ready		

Please note that the position pin holes come very close to the L

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET

Mirella series


last update 18/2/2013

PHILIPS
LUMILEDS


GENERAL INFORMATION

- Product series especially designed & optimized for LUXEON M series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).


Relative intensity of C12480_Mirella_50-S-PIN_(LUXEON M)

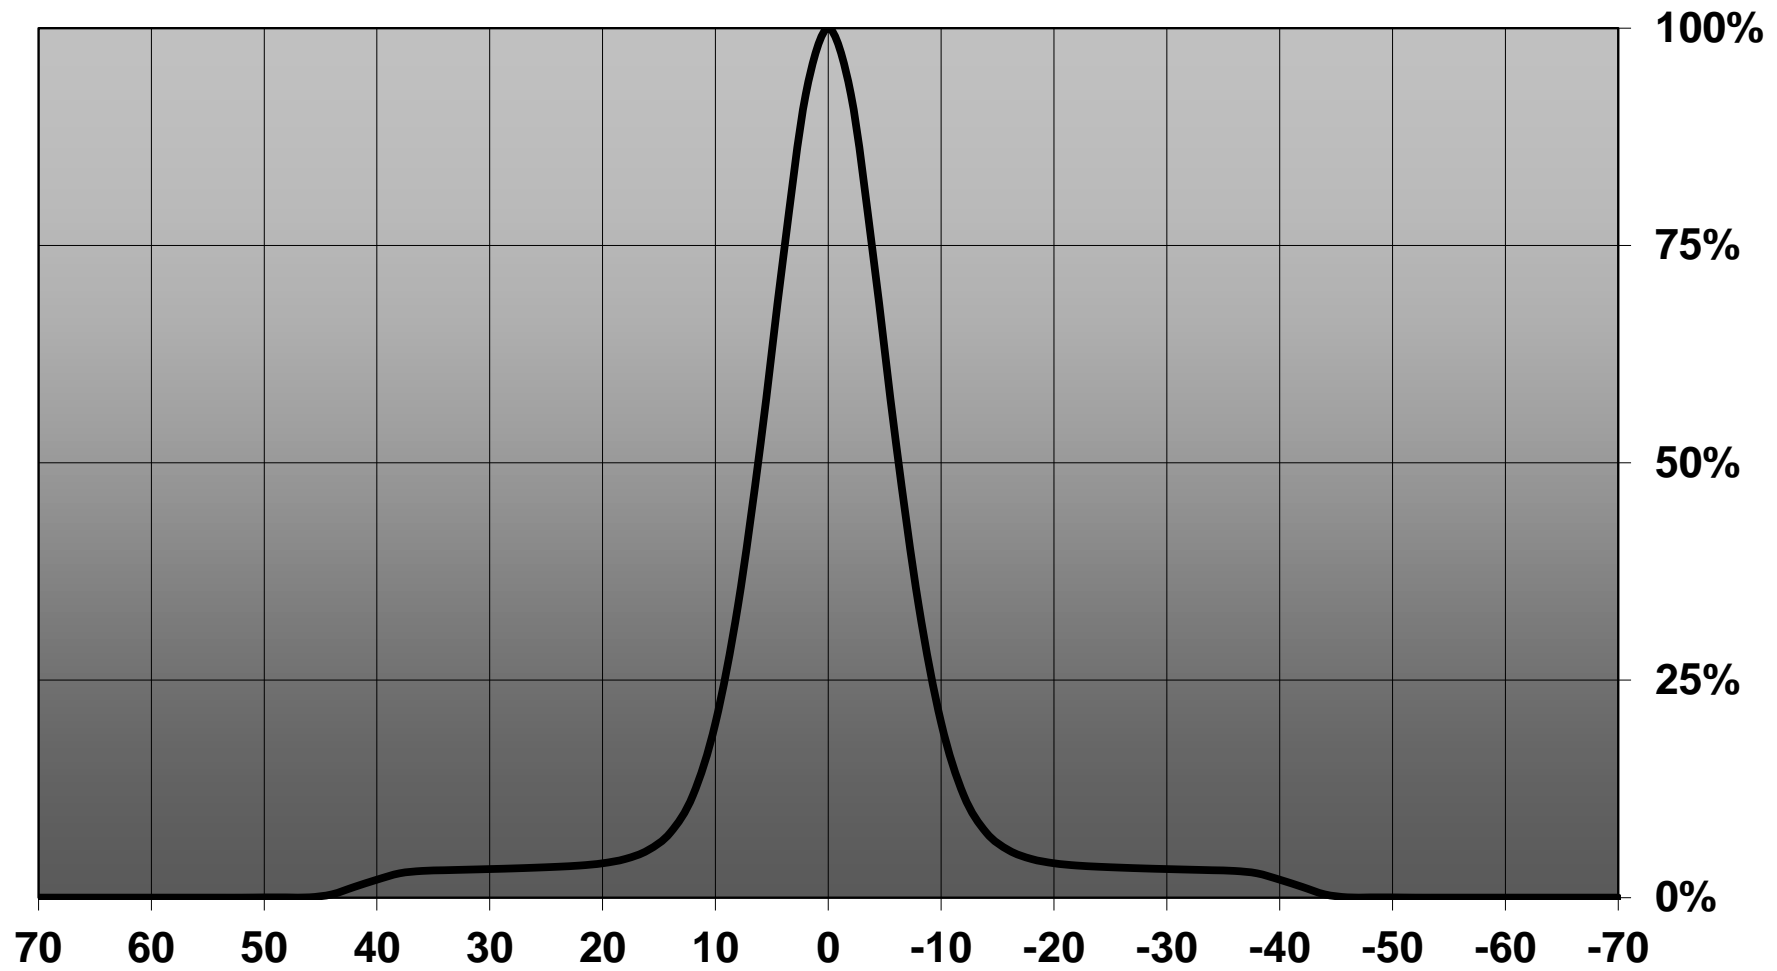


Relative intensity of CN12486_MIRELLA-50-S-PIN-DL_(LUXEON M)

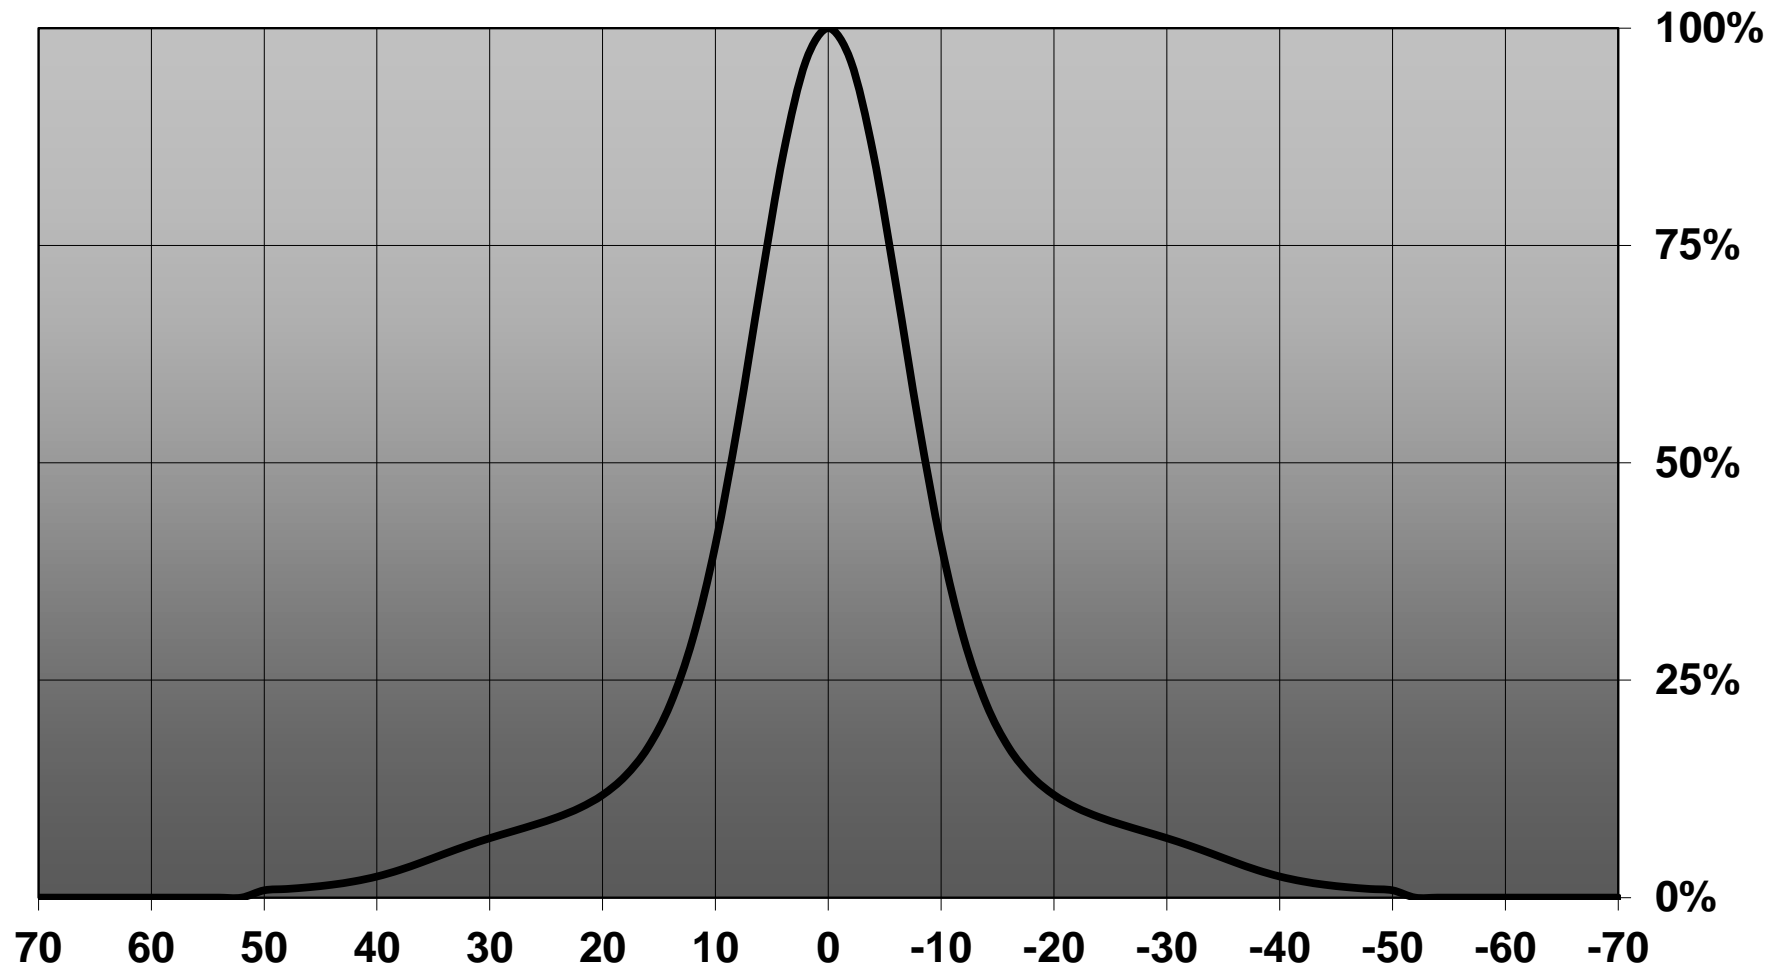


Relative intensity of C12481_Mirella_50-M-PIN_(LUXEON M)

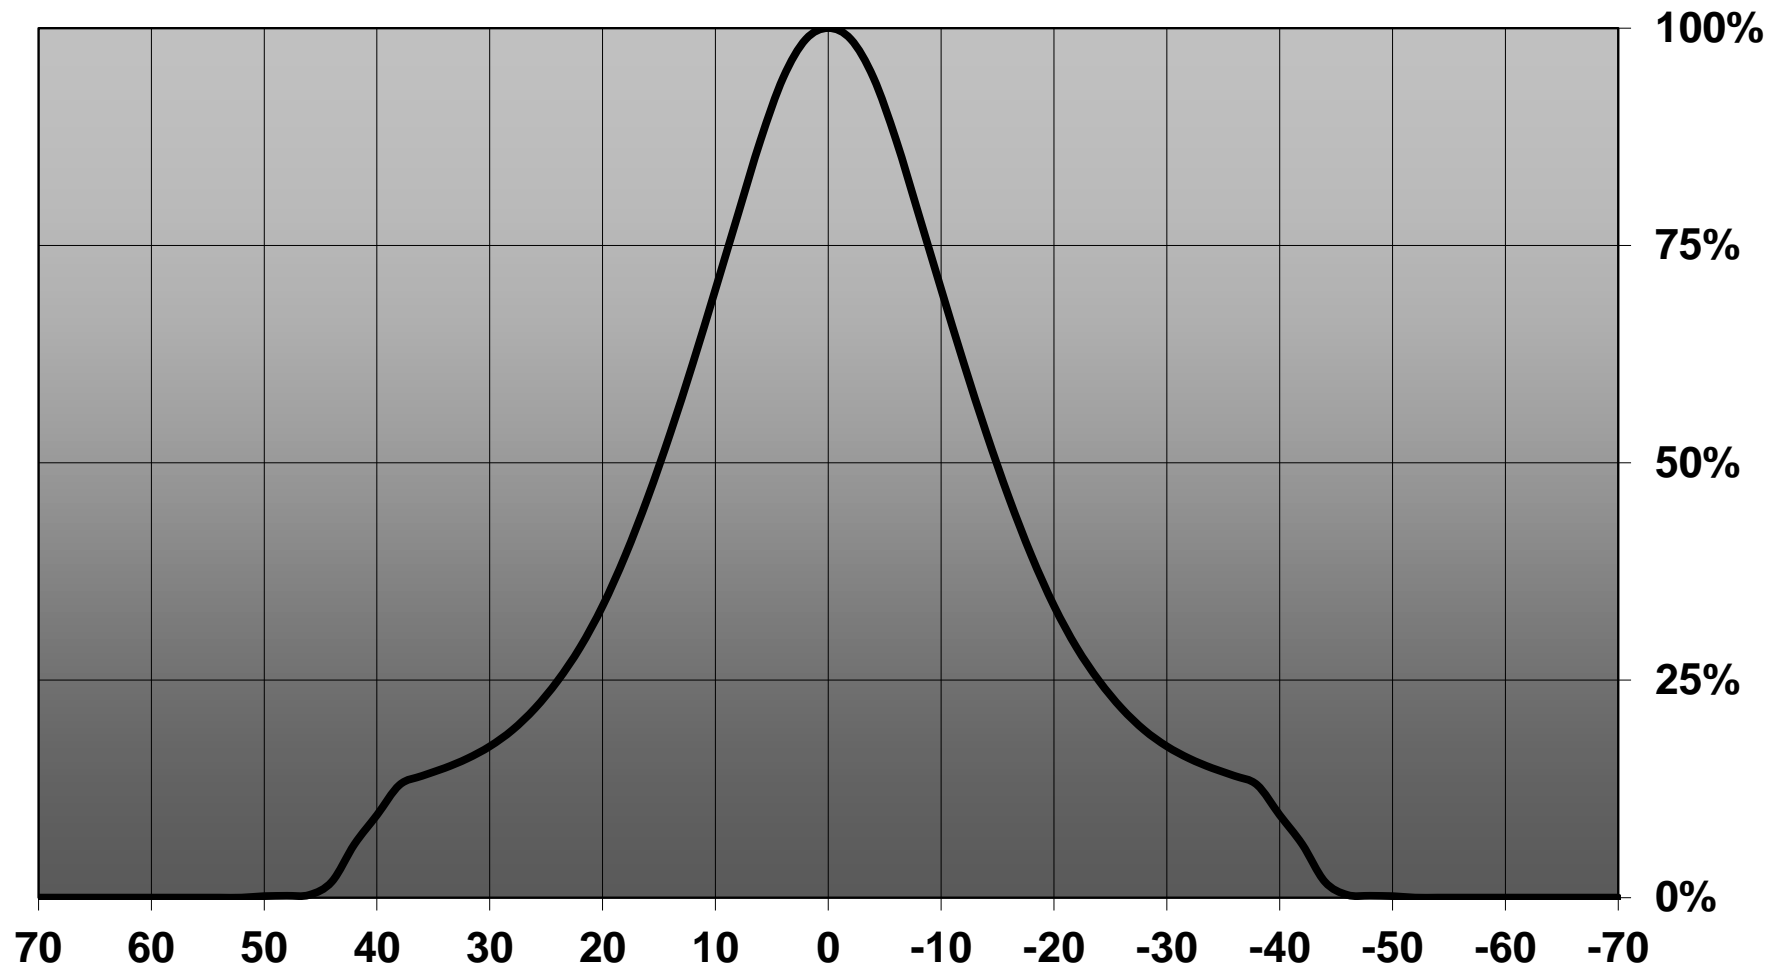


Relative intensity of CN12487_MIRELLA-50-M-PIN-DL_(LUXEON M)

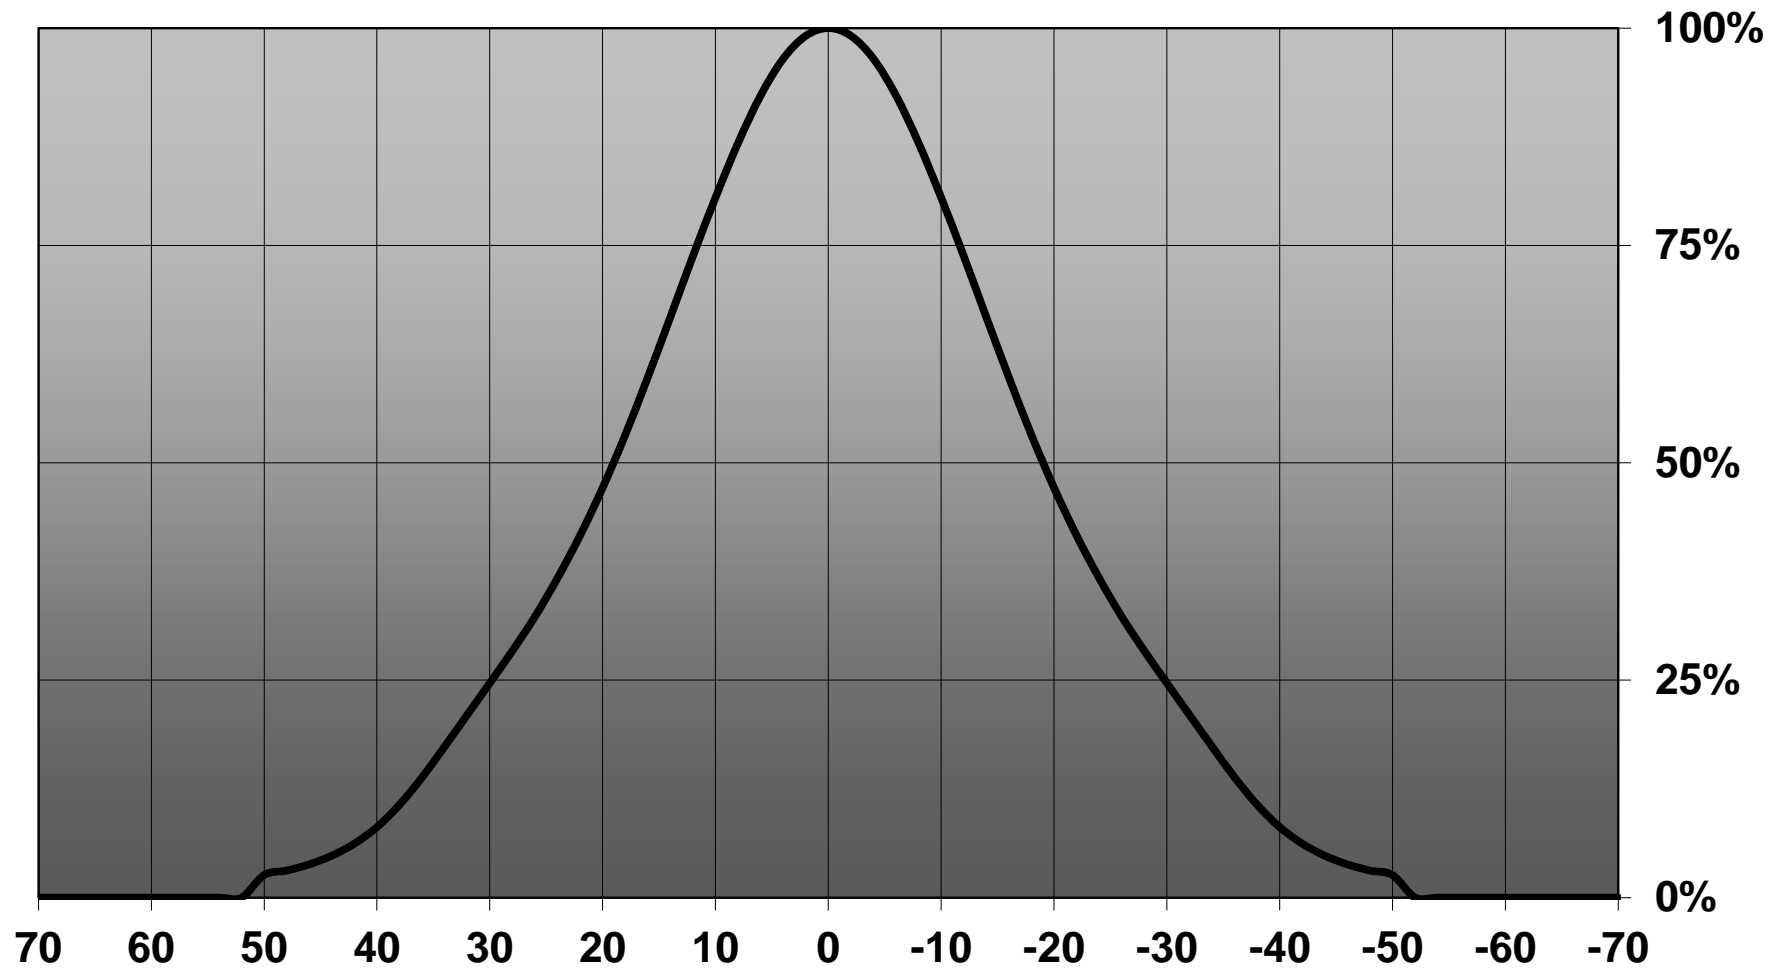


Relative intensity of C12482_Mirella_50-W-PIN_(LUXEON M)

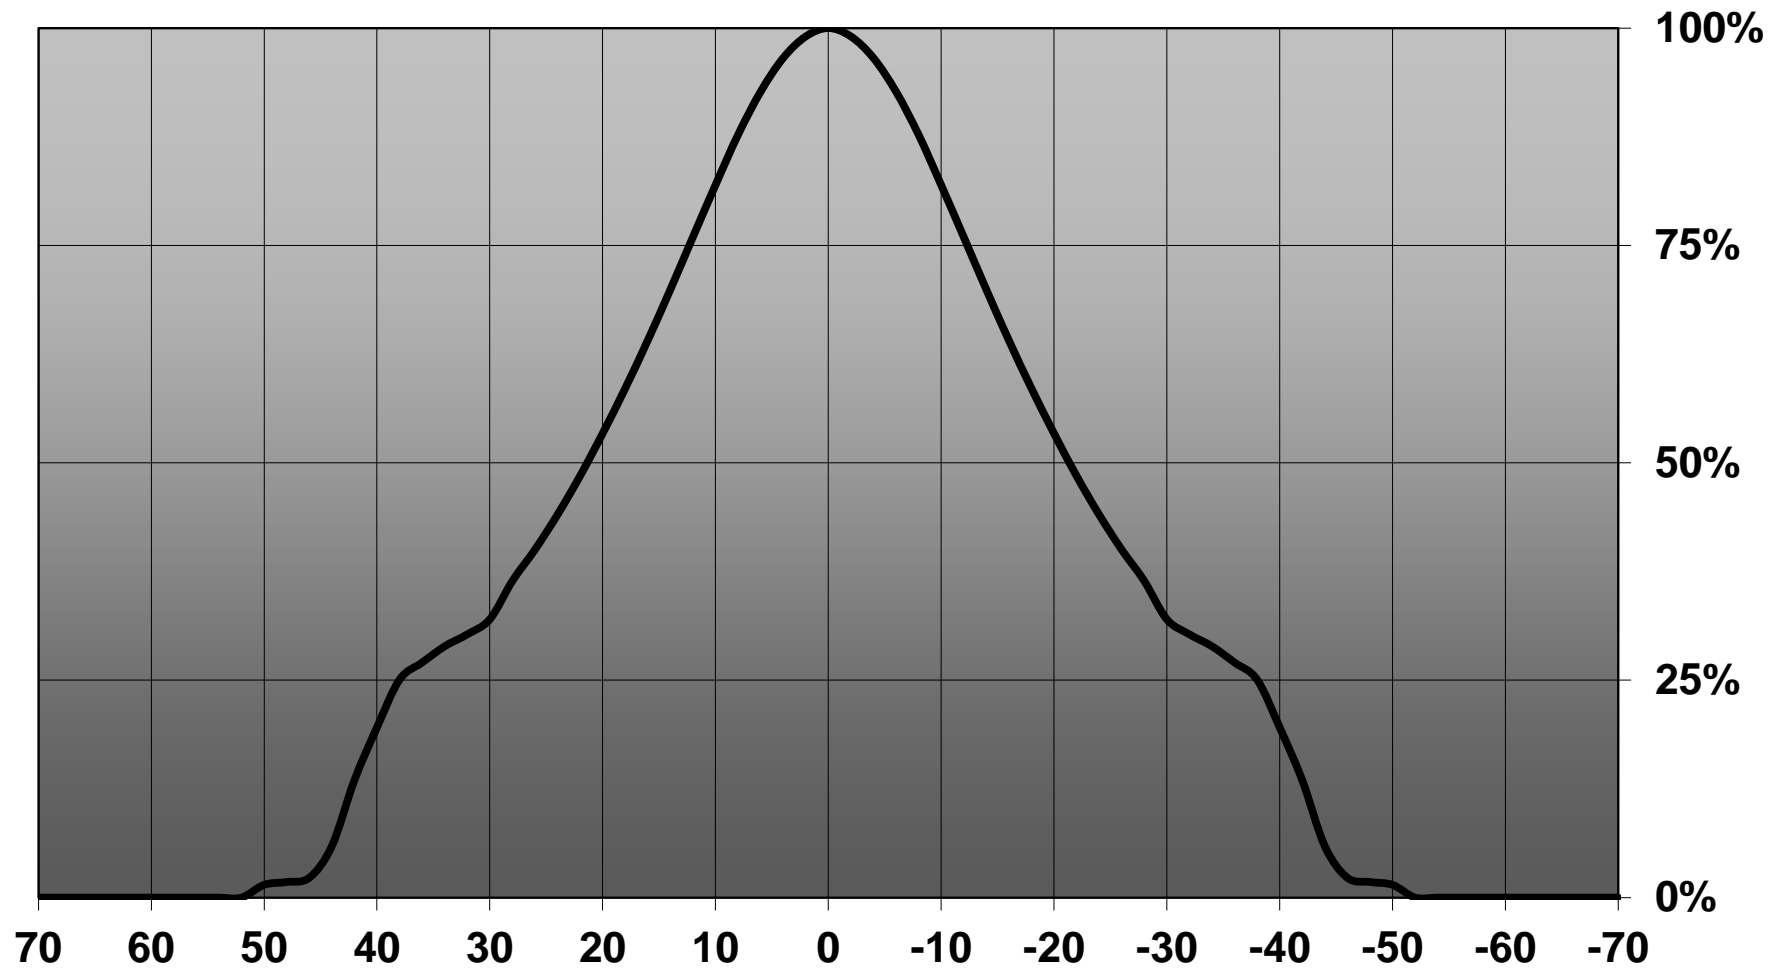

Relative intensity of CN12488_MIRELLA-50-W-PIN-DL_(LUXEON A)

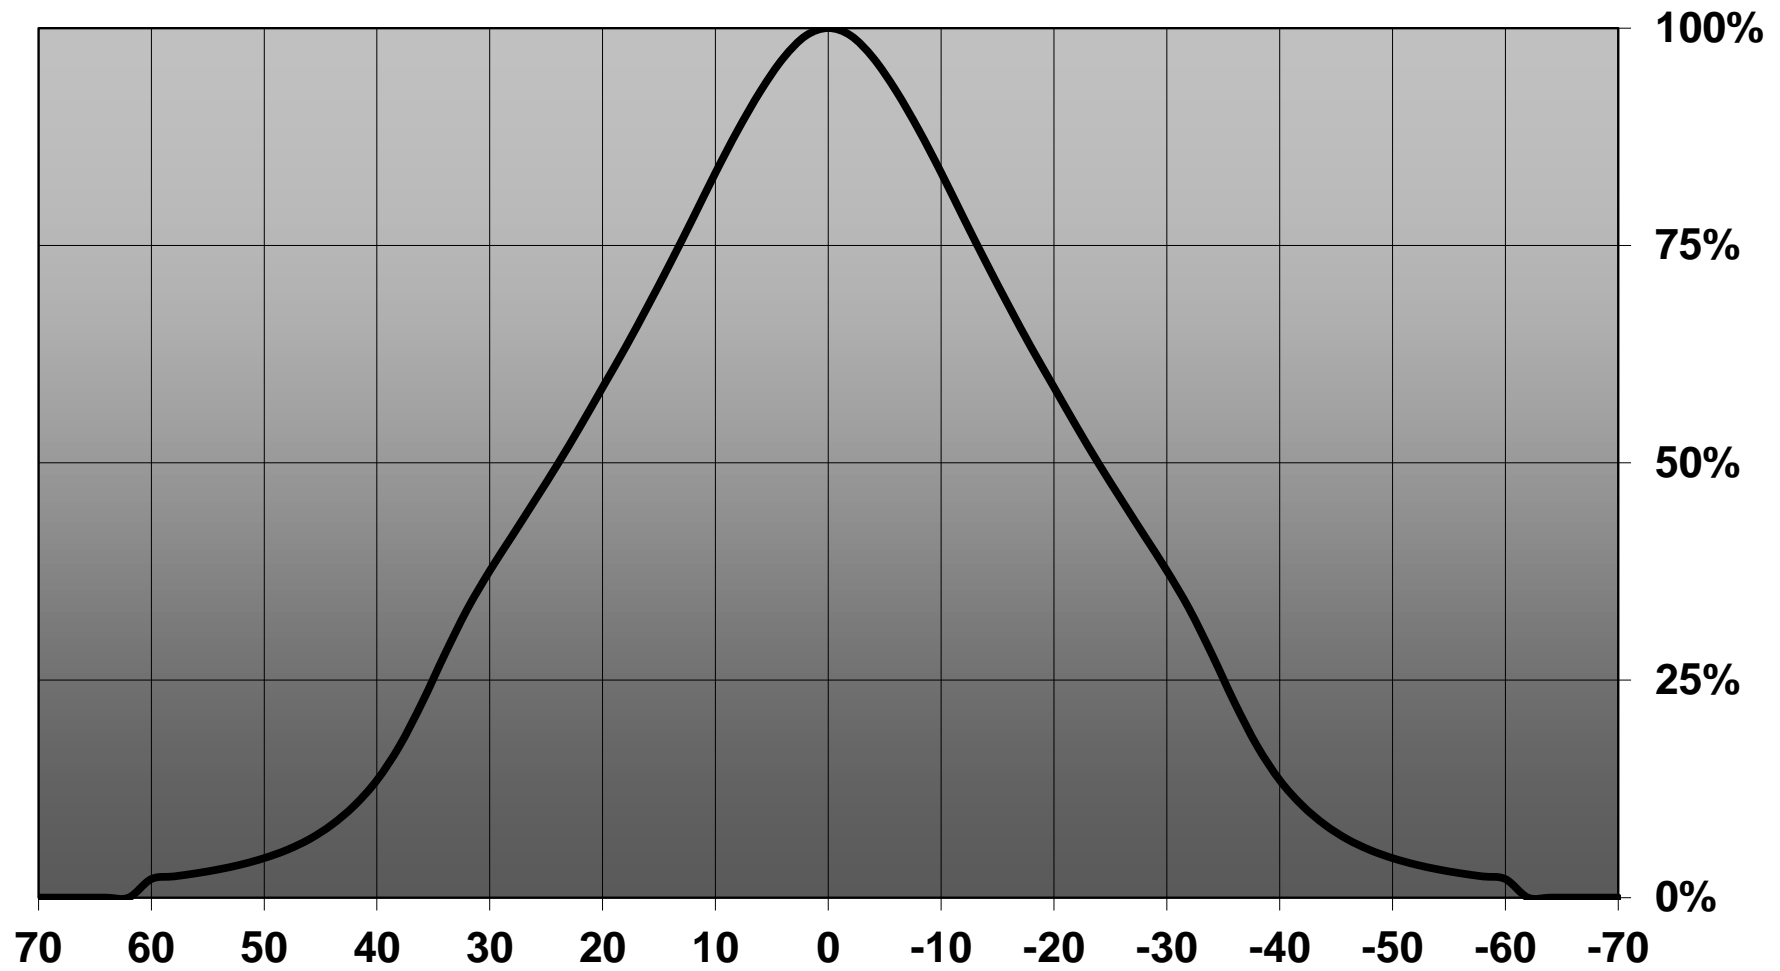

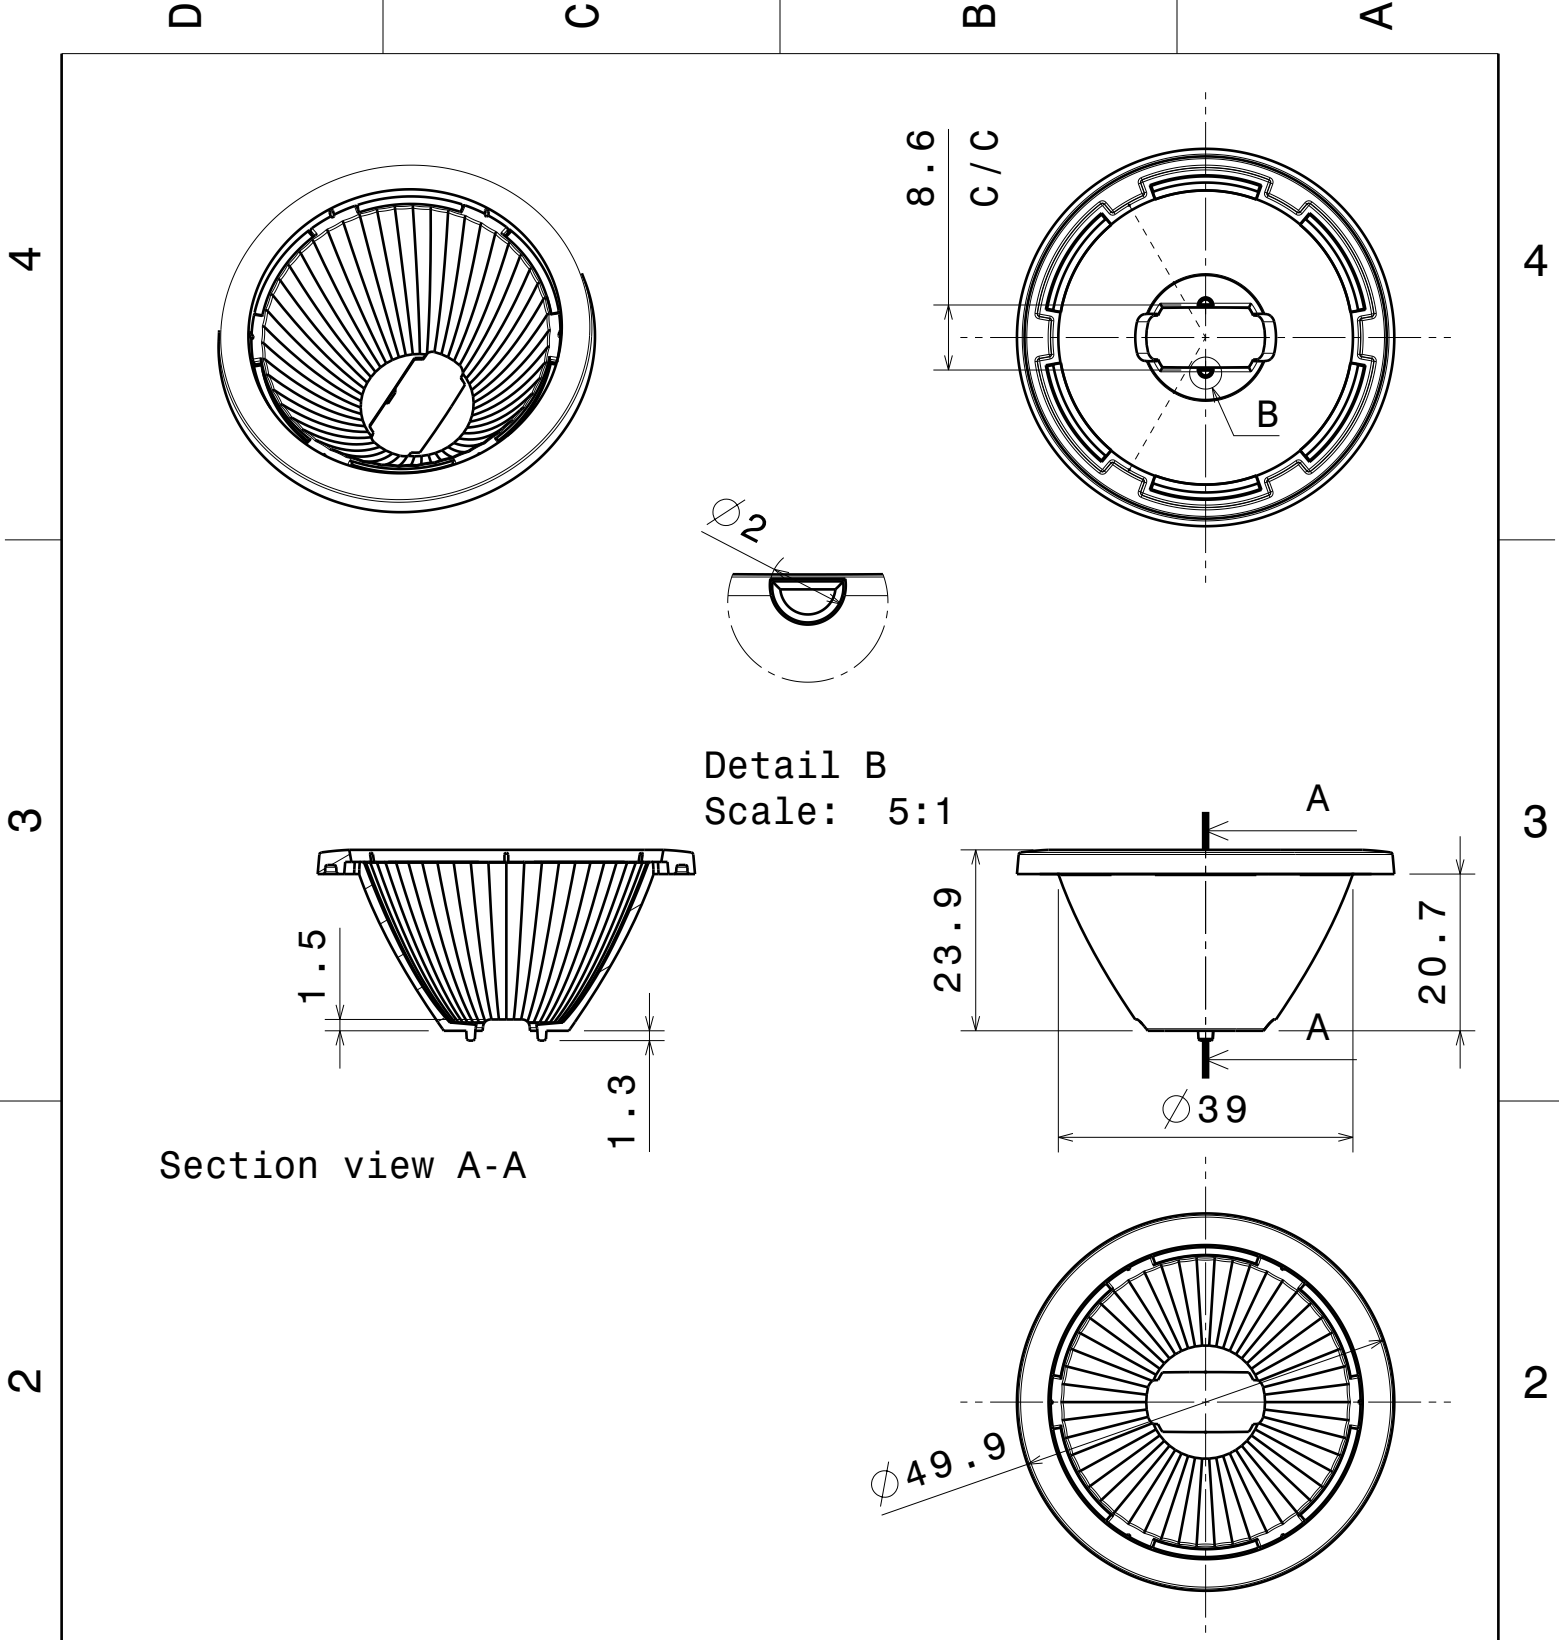

Section view A-A

Detail B
Scale: 5:1

Material: PC, metal plated

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



Ledil Oy
Salorankatu 10
FIN-24240 SALO
Finland

DRAWING TITLE


Datasheet Mirella pin reflector

DRAWN BY pl		DATE 25.11.2011		SIZE A4		DRAWING NUMBER		REV 1	
CHECKED BY		DATE		SCALE 1:1		WEIGHT (g)		SHEET 1/1	
DESIGNED BY pl		DATE 25.11.2011							


D

A


Luminaire: Ledil Oy CN12487_MIRELLA-50-M-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=81%
Lamps: 1 x Luxeon M 362lm @ 250mA

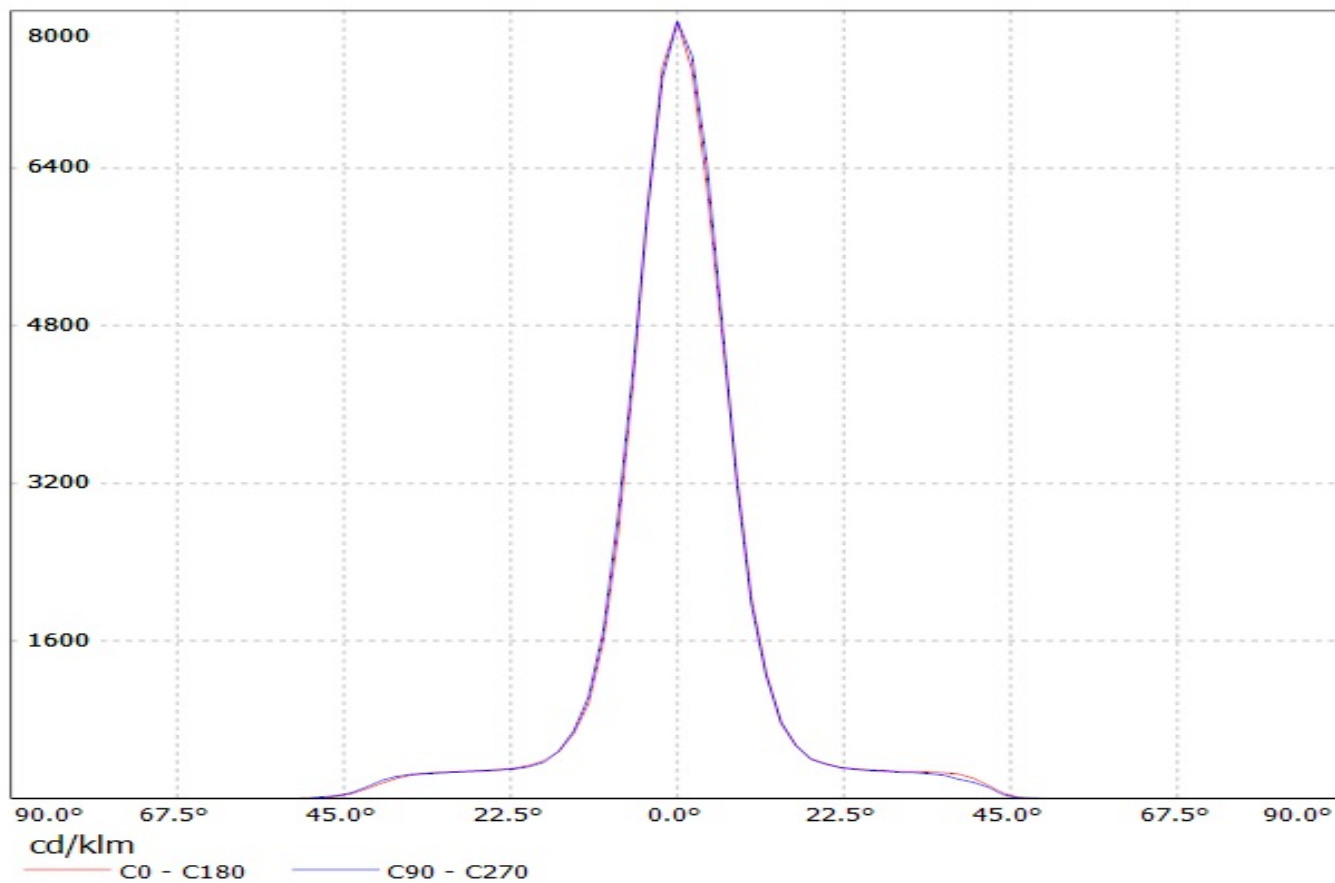


Luminaire: Ledil Oy CN12486_MIRELLA-50-S-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=83%
Lamps: 1 x Luxeon M 362lm @ 250mA

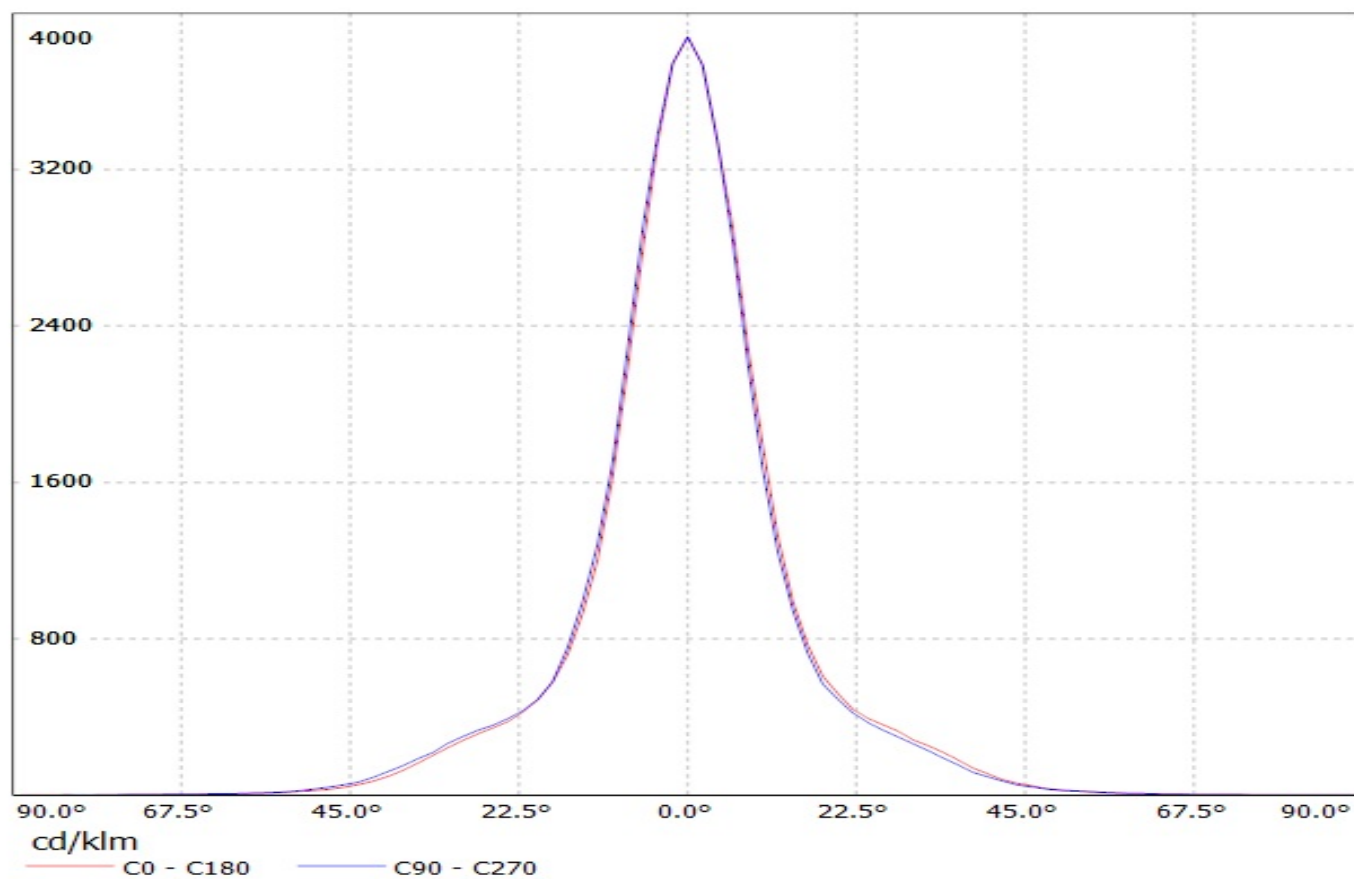


Luminaire: Ledil Oy C12481_Mirella_50-M-PIN (Luxeon M 362lm @ 250mA) Efficiency=87%
Lamps: 1 x Luxeon M 362lm @ 250mA

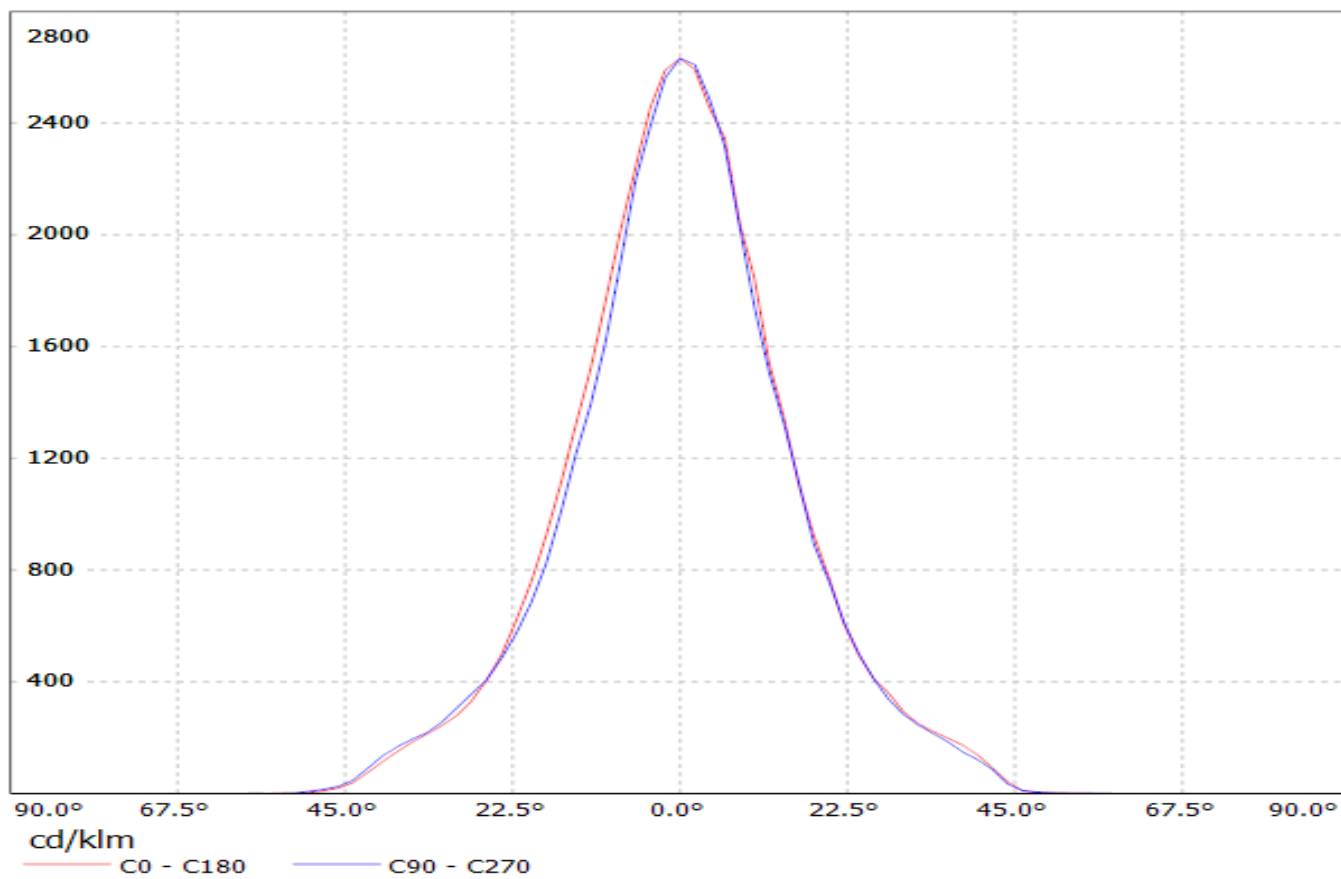


Luminaire: Ledil Oy CN12487_MIRELLA-50-M-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=81%
Lamps: 1 x Luxeon M 362lm @ 250mA

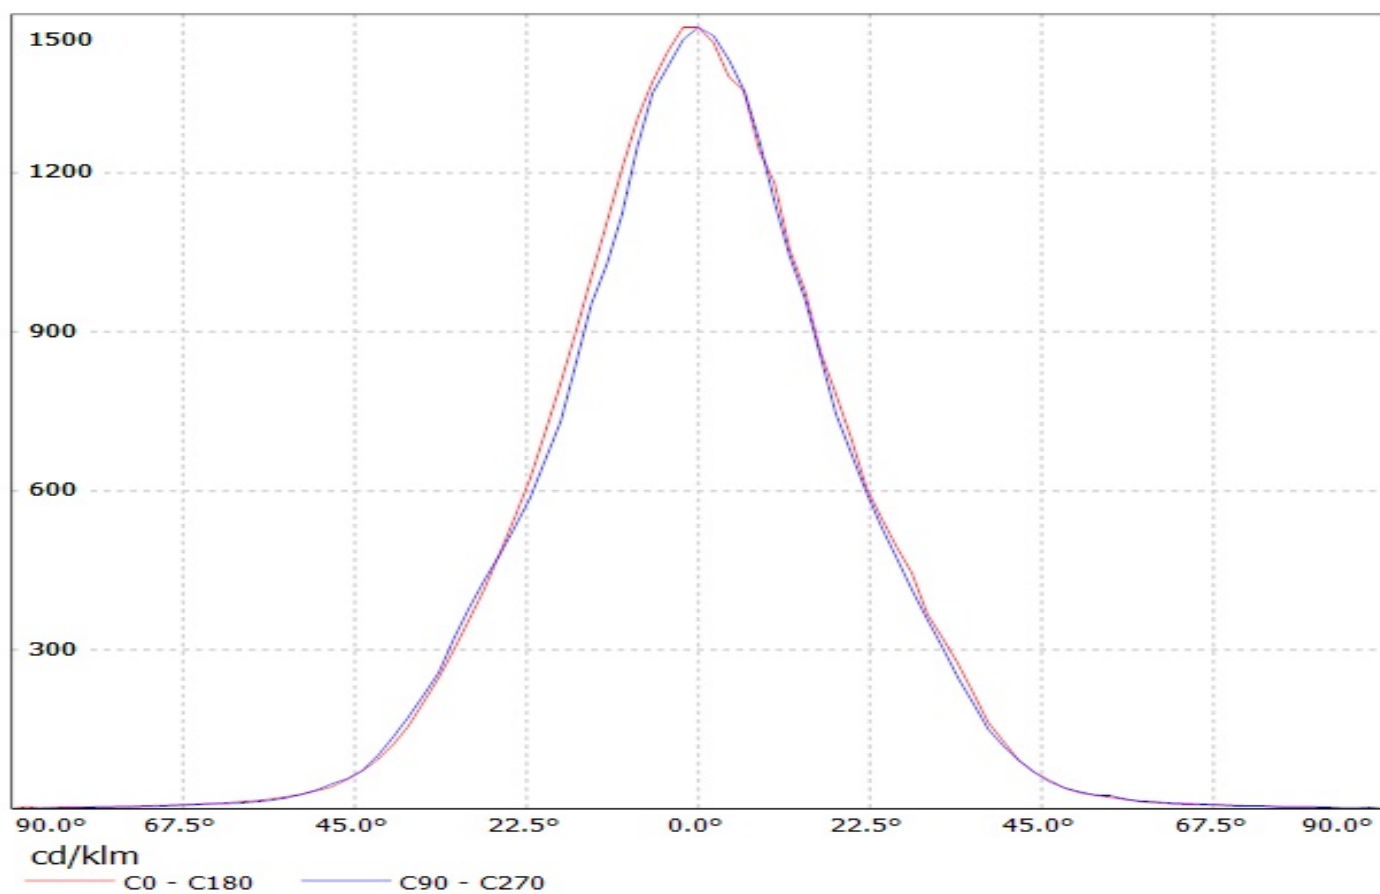


Luminaire: Ledil Oy C12482_Mirella_50-W_pin (Luxeon M 362lm @ 250mA) Efficiency=87%
Lamps: 1 x Luxeon M 362lm @ 250mA

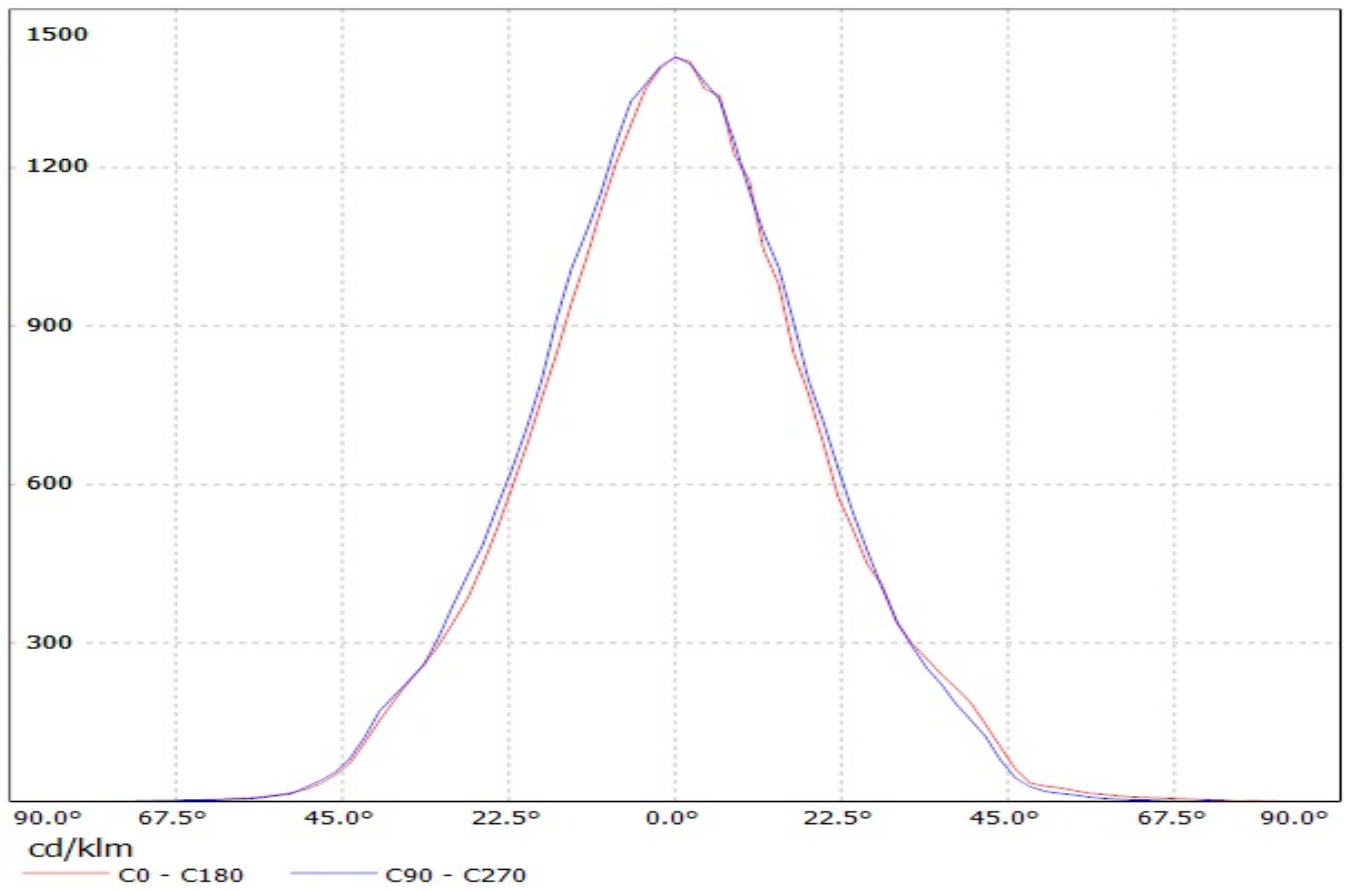

Luminaire: Ledil Oy CN12488_MIRELLA-50-W-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=80%
Lamps: 1 x Luxeon M 362lm @ 250mA

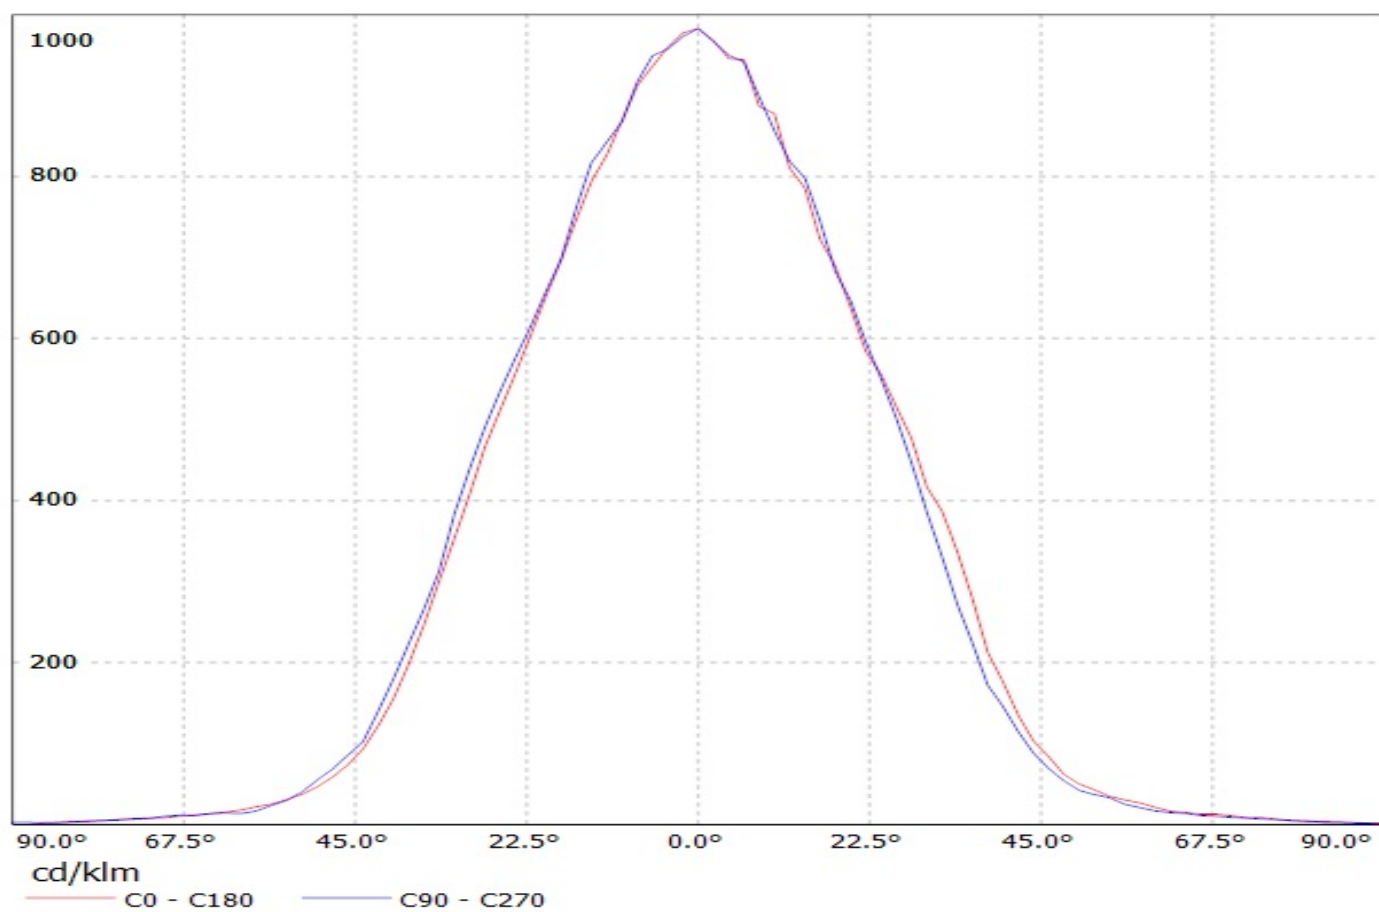

Luminaire: Ledil Oy CN12487_MIRELLA-50-M-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=81%
Lamps: 1 x Luxeon M 362lm @ 250mA

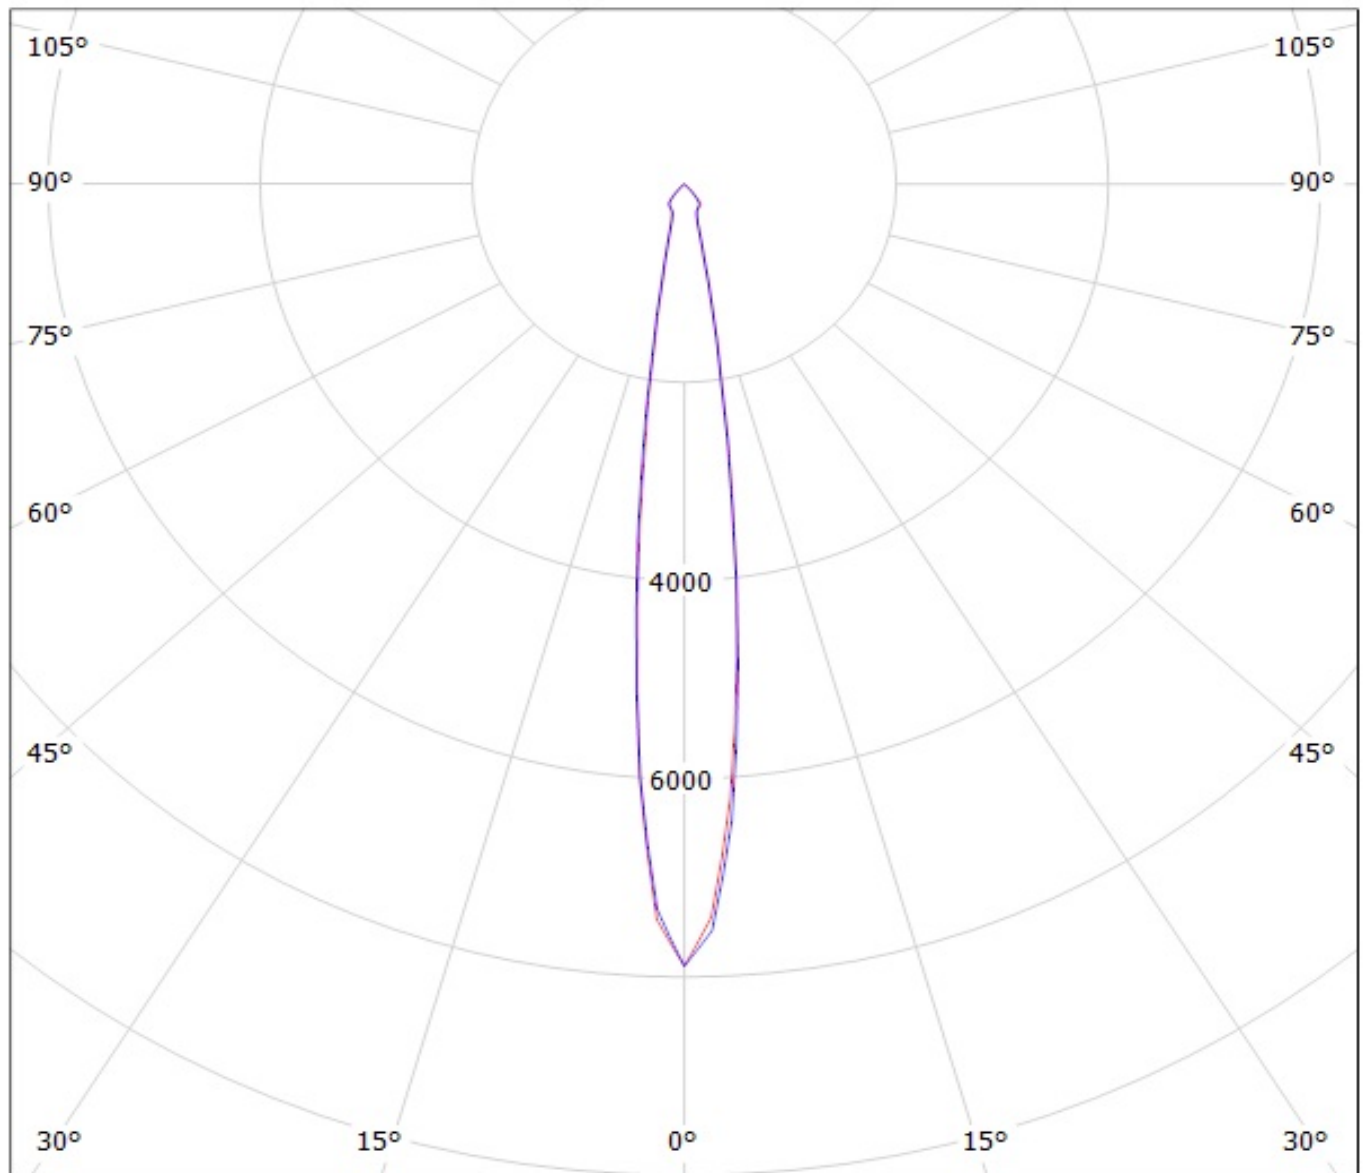


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy CN12486_MIRELLA-50-S-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=83%
Lamps: 1 x Luxeon M 362lm @ 250mA

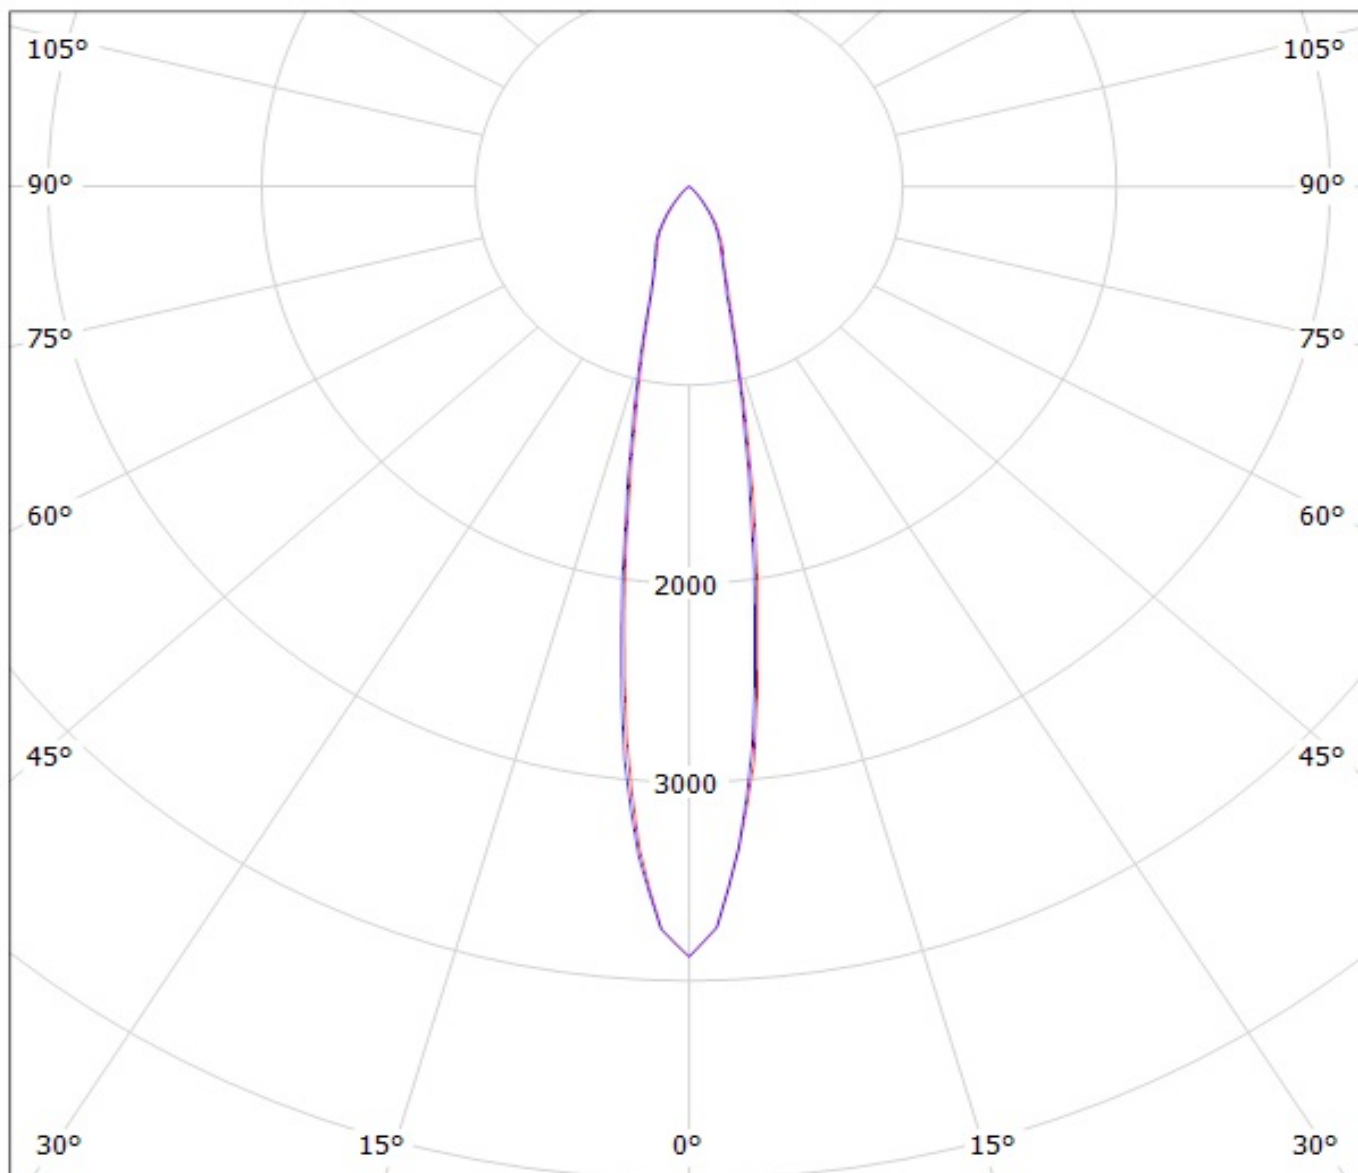


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy CN12486_MIRELLA-50-S-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=83%
Lamps: 1 x Luxeon M 362lm @ 250mA

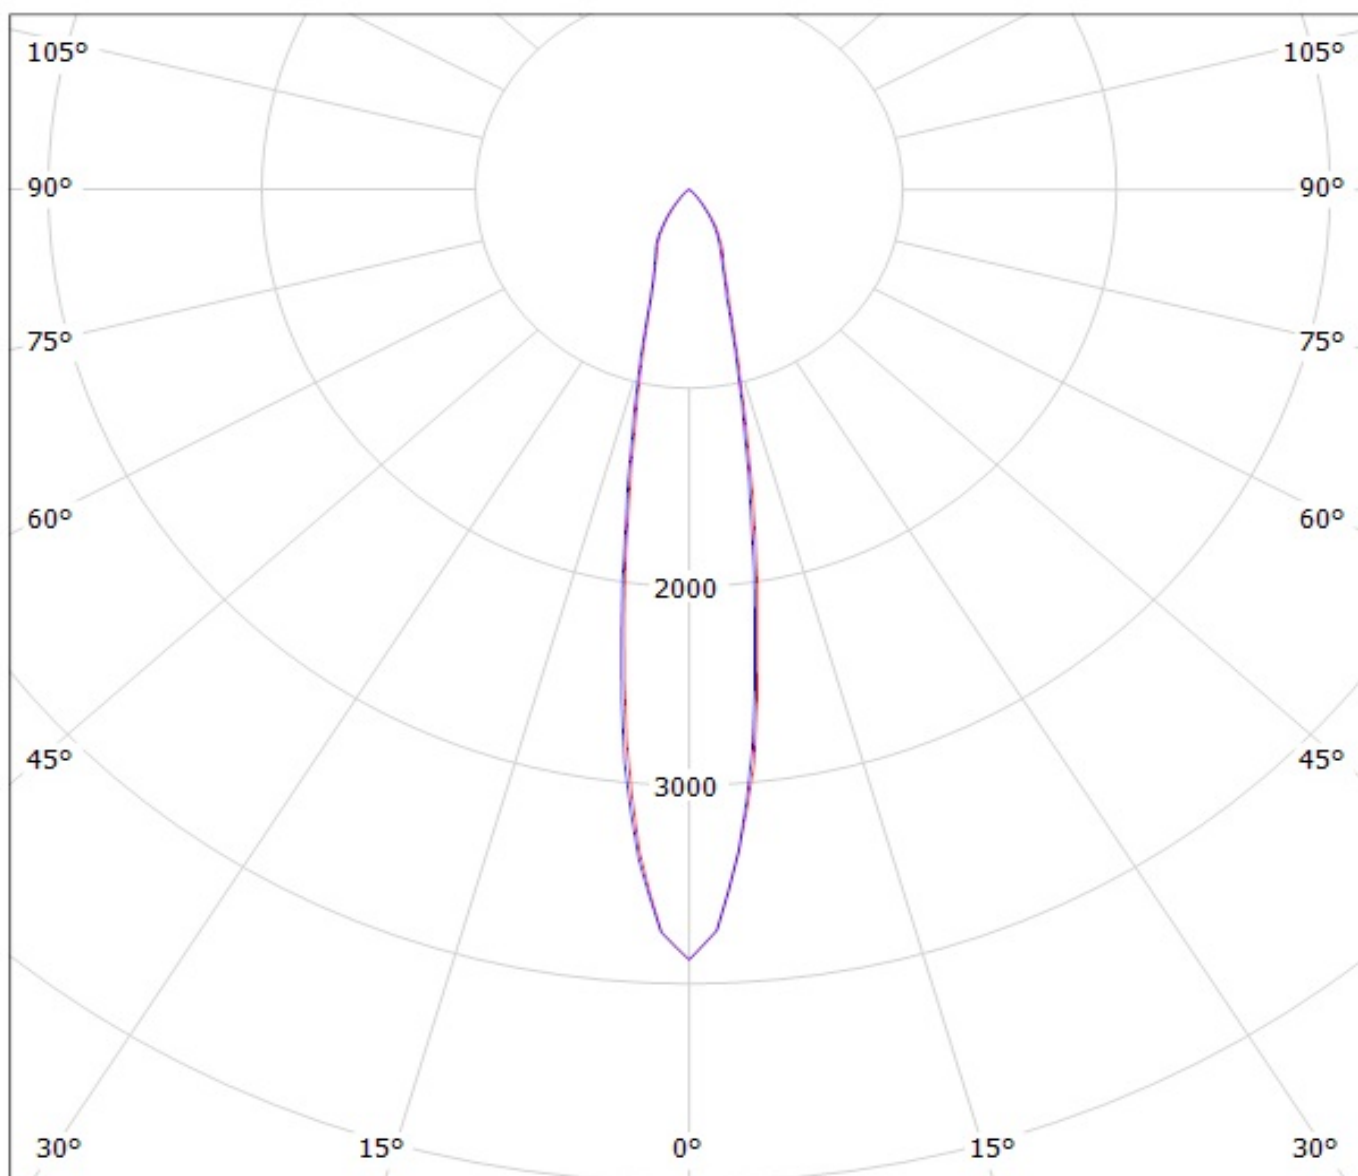


cd/klm


— C0 - C180

— C90 - C270


Luminaire: Ledil Oy CN12487_MIRELLA-50-M-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=81%
Lamps: 1 x Luxeon M 362lm @ 250mA

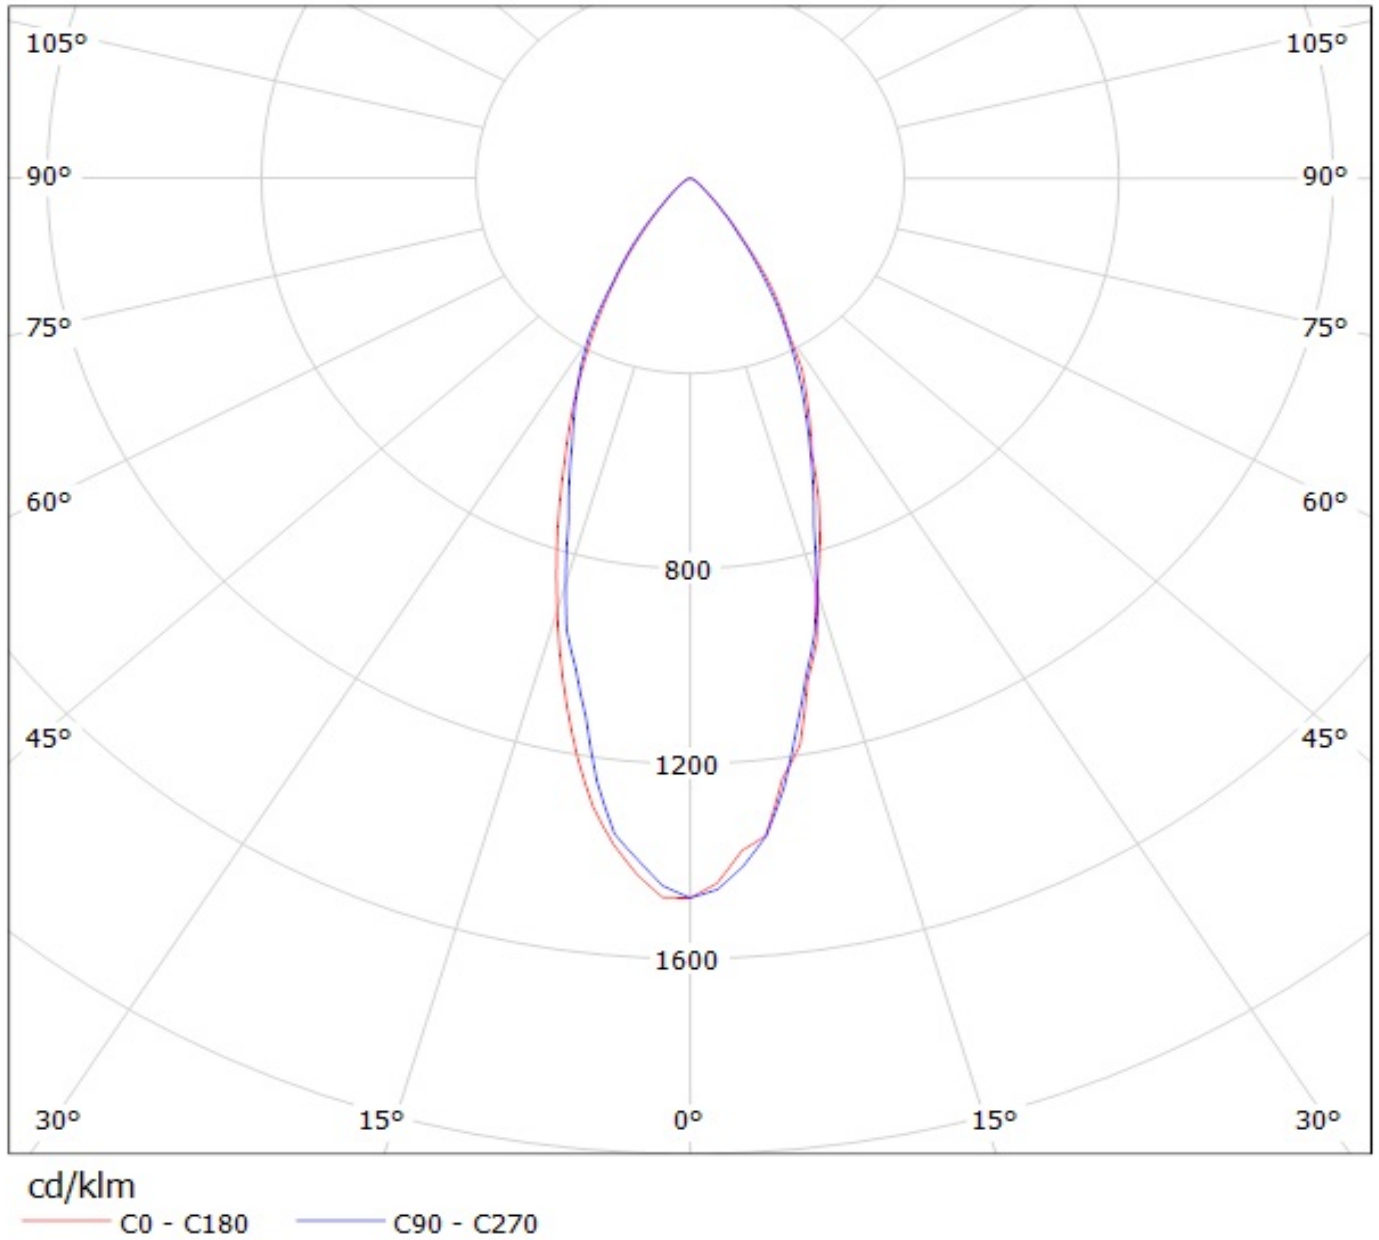

Luminaire: Ledil Oy C12482_Mirella_50-W_pin (Luxeon M 362lm @ 250mA) Efficiency=87%
Lamps: 1 x Luxeon M 362lm @ 250mA

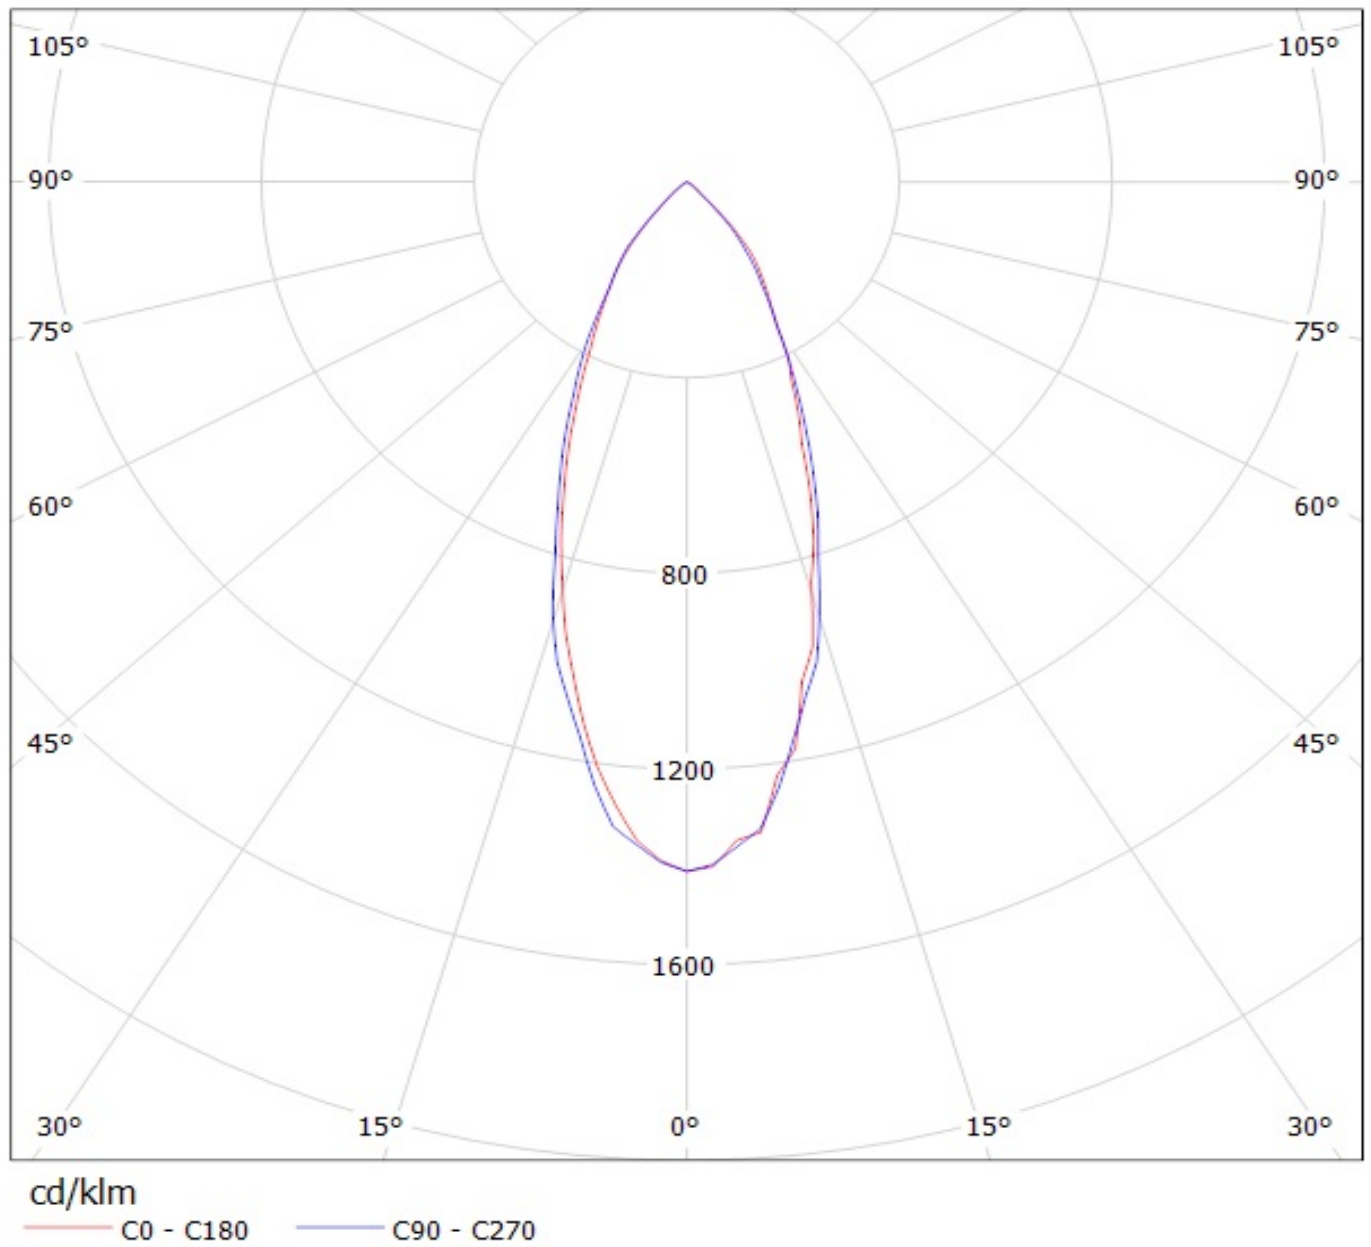

Luminaire: Ledil Oy CN12488_MIRELLA-50-W-PIN-DL (Luxeon M 362lm @ 250mA) Efficiency=80%
Lamps: 1 x Luxeon M 362lm @ 250mA

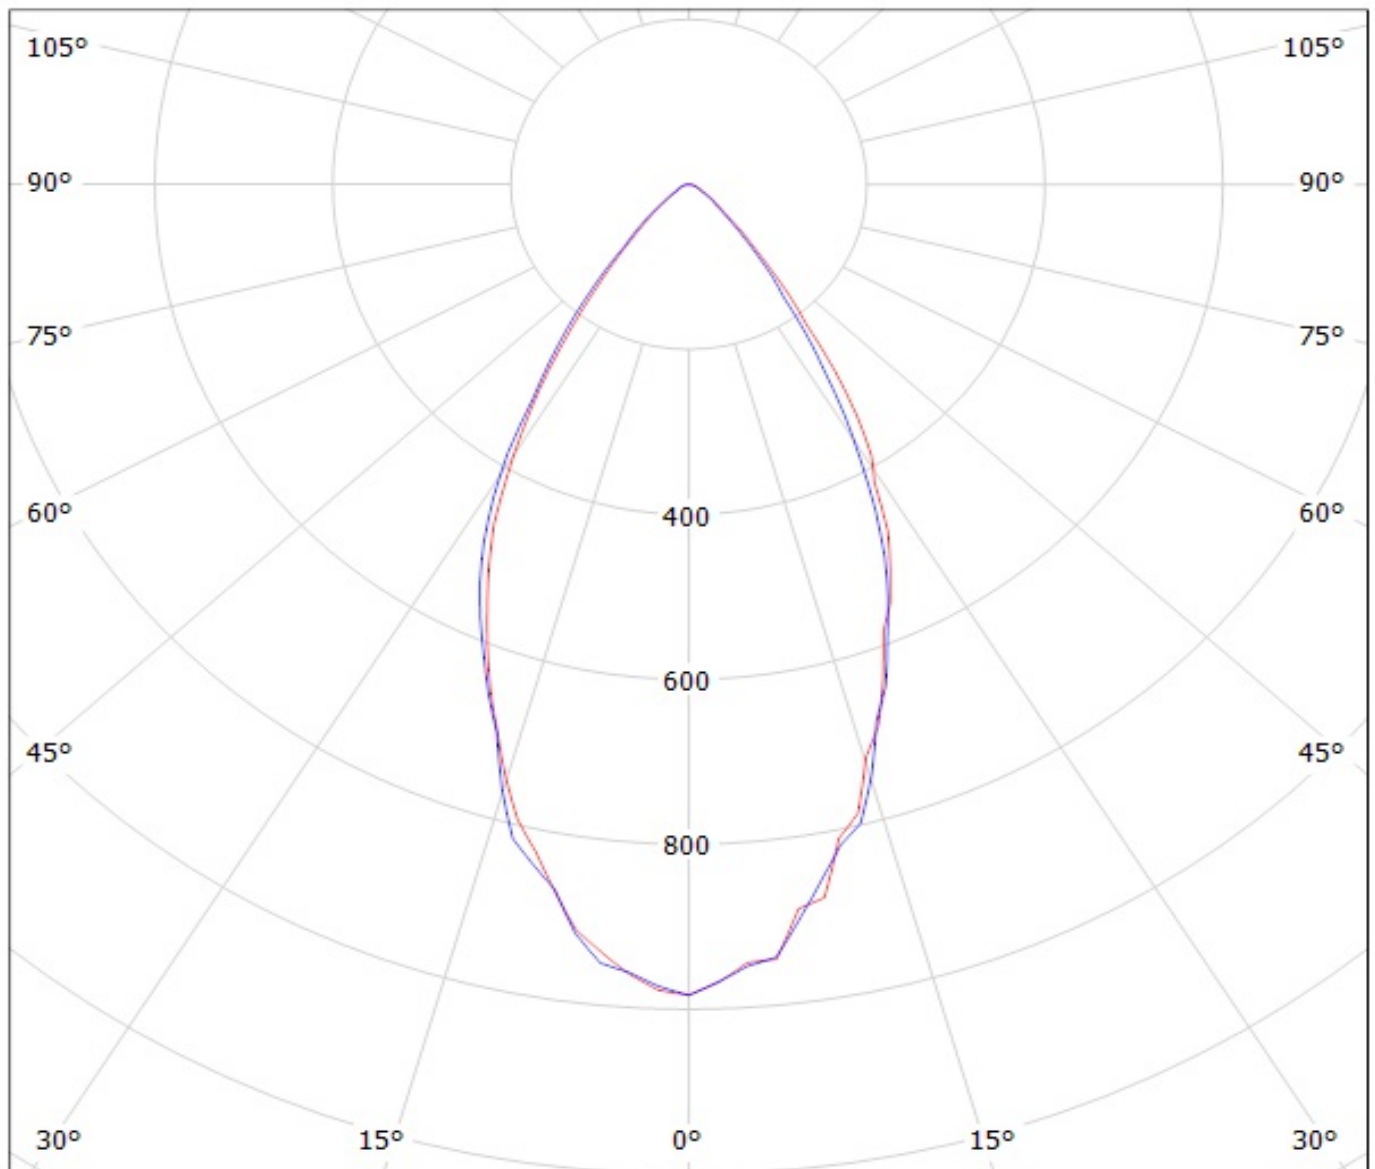

cd/klm
— C0 - C180 — C90 - C270