

# Features

- 2:1 Wide Input Voltage Range
- 15 Watts Output Power
- 1.6kVDC Isolation
- UL Certified
- Fixed Operating Frequency
- Six-Sided Continuous Shield
- Standard 50.8 x 25.4 x 10.2mm Package
- Efficiency to 88 %

## Description

The RP15-F series DC/DC converters are certified to UL 60950-1 and to cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 1" package meets military standards for thermal shock and vibration tolerance.

## Selection Guide 12V, 24V and 48V Input Types

Part Number	Input Range VDC	Output Voltage VDC	Output Current mA	Input <sup>(4)</sup> Current mA	Efficiency <sup>(5)</sup> %	Capacitive <sup>(6)</sup> Load max.
RP15-123.3SF	9-18	3.3	4000	1467	79	10200µF
RP15-1205SF	9-18	5	3000	1603	82	7050µF
RP15-1212SF	9-18	12	1250	1524	86	1035µF
RP15-1215SF	9-18	15	1000	1524	86	705µF
RP15-243.3SF	18-36	3.3	4000	724	80	10200µF
RP15-2405SF	18-36	5	3000	781	84	7050µF
RP15-2412SF	18-36	12	1250	772	85	1035µF
RP15-2415SF	18-36	15	1000	772	85	705µF
RP15-483.3SF	36-75	3.3	4000	357	81	10200µF
RP15-4805SF	36-75	5	3000	396	83	7050µF
RP15-4812SF	36-75	12	1250	377	87	1035µF
RP15-4815SF	36-75	15	1000	381	86	705µF
RP15-1205DF	9-18	±5	±1500	1582	83	±1020µF
RP15-1212DF	9-18	±12	±625	1524	86	±495µF
RP15-1215DF	9-18	±15	±500	1563	84	±165µF
RP15-2405DF	18-36	±5	±1500	781	84	±1020µF
RP15-2412DF	18-36	±12	±625	762	86	±495µF
RP15-2415DF	18-36	±15	±500	762	86	±165µF
RP15-4805DF	36-75	±5	±1500	386	85	±1020µF
RP15-4812DF	36-75	±12	±625	372	88	±495µF
RP15-4815DF	36-75	±15	±500	377	87	±165µF

\* add /P for CTRL function with Positive Logic (1=ON, 0=OFF)

\* add /N for CTRL function with Negative Logic (0=ON, 1=OFF)

\* add suffix -HC for premounted heatsink and clips

## Ordering Examples

RP15-2405SF/P = 24V Input, 5V Output, Positive Logic CTRL pin fitted

RP15-4805DF-HC = 48V Input, ±5V Output, No CTRL pin, Heatsink fitted

Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at [info@recom-development.at](mailto:info@recom-development.at)

# POWERLINE

## DC/DC-Converter

with 3 year Warranty

# RECOM

## 15 Watt

## 2" x 1"

## Single &


## Dual Output




**UL-60950-1 Certified**  
**E196683**

# RP15-F

## Derating Graph (Ambient Temperature)



### RP15-4805SF With Heat Sink




**Refer to Application Notes**

**Typical Characteristics**


**RP15-4805SF**

Efficiency VS Input Voltage

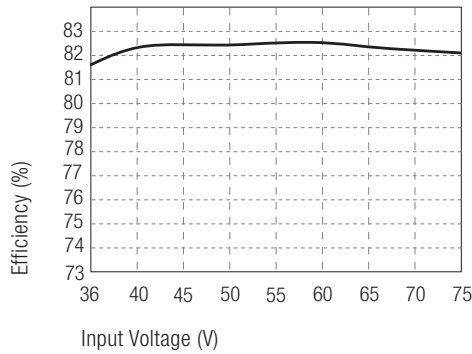

**RP15-4805SF**

Efficiency VS Output load

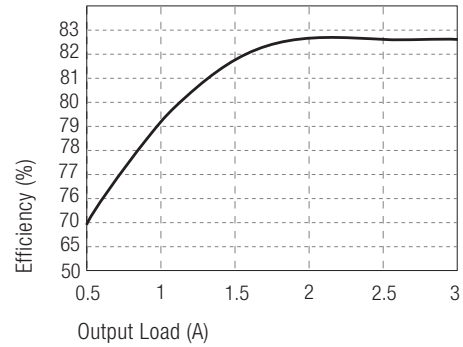

**Specifications** (typical at nominal input and 25°C unless otherwise noted)

Input Voltage Range	12V nominal input	9-18VDC	
	24V nominal input	18-36VDC	
	48V nominal input	36-75VDC	
Input Filter		Pi Type	
Input Surge Voltage (100 ms max.)	12V Input	36VDC	
	24V Input	50VDC	
	48V Input	100VDC	
Input Reflected Ripple (nominal Vin and full load) <sup>(3)</sup>		20mA <sub>p-p</sub>	
Start Up Time (nominal Vin and constant resistor load)		20ms typ.	
Remote ON/OFF <sup>(7)</sup>	(Positive logic)	DC-DC ON	Open or 3.5V < Vr < 12V
		DC-DC OFF	Short or 0V < Vr < 1.2V
(Negative logic)	DC-DC ON	Short or 0V < Vr < 1.2V	
	DC-DC OFF	Open or 3.5V < Vr < 12V	
Remote OFF input current	Nominal input	20mA	
Output Power		15W max.	
Output Voltage Accuracy (full Load and nominal Vin)		±1%	
Minimum Load <sup>(1)</sup>		10% of full load	
Line Regulation (low line, high line at full load)		±1%	
Load Regulation (25% to 100% full load)	Single	±1%	
	Dual	±2%	
Cross Regulation (asymmetrical 25% y-<>100% load)		±5%	
Ripple and Noise (20MHz bandwidth, with 1µF MLCC on output)	Single	50mV <sub>p-p</sub>	
	Dual	75mV <sub>p-p</sub>	
Temperature Coefficient		±0.02%/°C max.	

continued on next page




**Specifications** (typical at nominal input and 25°C unless otherwise noted)

Transient Response (25% load step change)		500µs
Over Voltage Protection	3.3V	3.9V
Zener diode clamp (only single)	5V	6.2V
	12V	15V
	15V	18V
Over Load Protection (% of full load at nominal Vin)		150% typ
Undervoltage Lockout		none
Short Circuit Protection		Hiccup, automatic recovery
Efficiency		see „Selection Guide“ table
Isolation Voltage (rated for one minute)		1600VDC
Isolation Resistance		1 GΩ min.
Isolation Capacitance		300pF max.
Operating Frequency	Single	500kHz typ.
	Dual	300kHz typ.
Approved to Safety Standards		UL 1950, EN60950
Operating Temperature Range		-40°C to +85°C(with derating)
Maximum Case Temperature		+100°C
Storage Temperature Range		-55°C to +125°C
Thermal Impedance <sup>(8)</sup>	Natural convection	12°C/Watt
	Natural convection with Heat Sink	10°C/Watt
Thermal Shock		MIL-STD-810D
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z
Relative Humidity		5% to 95% RH
Case Material		Nickel plated copper
Base Material		Non-conductive black plastic
Potting Material		Epoxy (UL94-V0)
Conducted Emissions <sup>(9)</sup>	EN55022	Class A
Radiated Emissions	EN55022	Class A
ESD	EN61000-4-2	Perf. Criteria B
Radiated Immunity	EN61000-4-3	Perf. Criteria B
Fast Transient <sup>(9)</sup>	EN61000-4-4	Perf. Criteria B
Surge <sup>(9)</sup>	EN61000-4-5	Perf. Criteria B
Conducted Immunity	EN61000-4-6	Perf. Criteria B
Weight		27g
Packing Quantity	Refer to App Notes for tube dimensions	9 pcs per Tube
Dimensions		50.8 x 25.4 x 10.2mm
MTBF <sup>(2)</sup>		2041 x 10 <sup>3</sup> hours

**Notes :**

1. The RP15 series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
2. BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment).
3. Simulated source impedance of 12μH. 12μH inductor in series with +Vin.
4. Maximum value at nominal input voltage and full load of standard type.
5. Typical value at nominal input voltage and full load.
6. Test by minimum Vin and constant resistor load.
7. The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to negative input.
  - Positive logic ON/OFF is marked with suffix-P (eg. RP15-2405SF/P)
  - Negative logic ON/OFF is marked with suffix-N (eg. RP15-2405SF/N).
  - If no suffix is specified, the control pin will be omitted.
8. Heat sink is optional and P/N: 7G-0020-C. Powerline DC/DC Converters can be ordered with pre-mounted heatsinks including antivibration fixing clips (add suffix -HC). See Application Notes for heatsink details.
9. RP15-24xx meets Class A. RP15-48xx requires 1μF MLCC across input to meet Class A. An external capacitor (220μF/Low ESR) is required to meet EN61000-4-4 and -5. See application notes for Class B common mode filter suggestion.

**Package Style and Pinning (mm)**

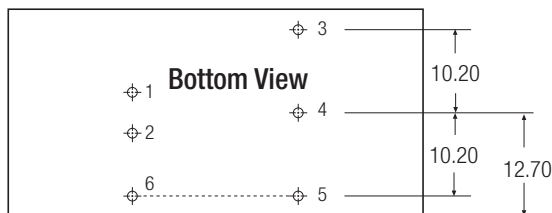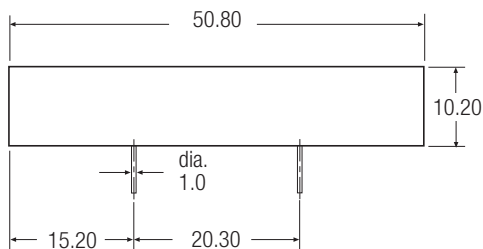

**Pin Connections**

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Com
5	-Vout	-Vout
6*	CTRL*	CTRL*

\* Optional. See Note 7.

Pin Pitch Tolerance ±0.25 mm  
Pin dimension tolerance ±0.1 mm  
Tolerance: X.X ±0.5mm  
X.XX ±0.25mm