


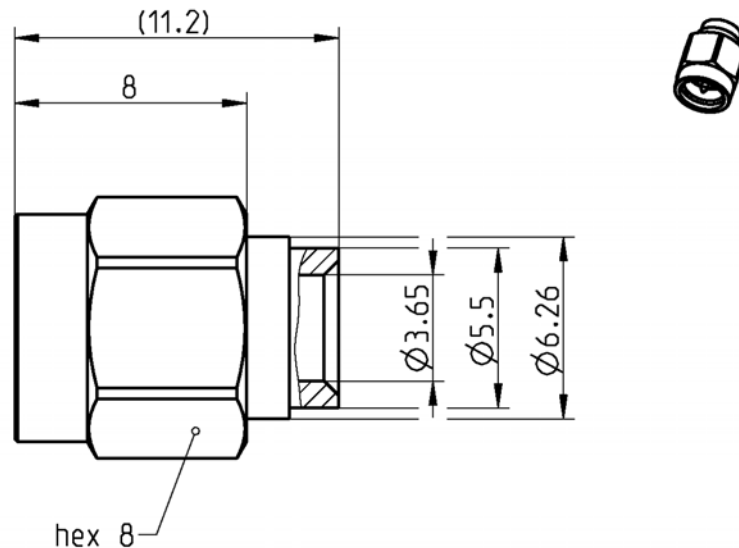

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to IEC 60169-15; EN 122110; MIL-STD-348A, Fig. 310

Documents

Assembly instruction 32 A3 or 32 A23

Material and plating

Connector parts

Center contact
Outer contact
Coupling nut
Dielectric
Gasket

Material

Brass
CuBe or equiv.
CuBe or equiv.
PTFE
Silicone

Plating

AuroDur®, gold plated
AuroDur®, gold plated
Gold, 0.1 µm

Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	$\leq 1.05 + 0.005 \times f \text{ [GHz]}$
Insertion loss	$\leq 0.03 \times \sqrt{f(\text{GHz})} \text{ dB}$
Insulation resistance	$\geq 5 \times 10^3 \text{ M}\Omega$
Center contact resistance	$\leq 3 \text{ m}\Omega$
Outer contact resistance	$\leq 2 \text{ m}\Omega$
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	$\leq 200 \text{ W @ 2 GHz}$
RF-leakage	$\geq 100 \text{ dB up to 1 GHz}$

- Limitations are possible due to the used cable type -

Mechanical data

Mating cycles	min. 500
Coupling nut retention	$\geq 270 \text{ N}$
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
2002/95/EC (RoHS)	compliant

Tooling

N/A

Suitable cables

UT 141, RG 402

Packing

Standard	300 pcs in box
Weight	2.35 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
A. König	04/04/07	F. Schmidhammer	13/09/07	b00	07-0011	M. Schmid	13/09/07

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
Fax: +49 8684 18-499
email: info@rosenberger.de

Page
2 / 2