

ZPSA100 Series

3" x 5" 100W AC-DC
Power Supplies

- PFC
- Wide Range AC Input
- Low Profile, Industry Standard Footprint
- Global Safety Agency Compliance
- RoHS Compliant

Key Market Segments & Applications

Video/Audio Routers
Datacom
Point of Sale
Test and Measurement
LED Information Displays

ZPSA100 Features and Benefits

Features

- Industry Standard Footprint
- Up to 90% efficiency
- Broad Product Range
- Meets EN61000-4 Immunity
- Low Profile

Benefits

- Available to Second Source
- Less System Heating
- Optimization of Power Supply to System
- Greater Reliability

Specifications

ITEMS		MODEL	ZPSA100
Input Voltage range	-	-	90 - 264VAC (47 - 440Hz) or 120 - 370VDC
Inrush Current	-	A	25 / 50 (cold start)
Input Current (115/230VAC)	-	A	1.1 / 0.6
Temperature Coefficient	-	-	±0.05%/°C
Voltage Accuracy	-	-	±1%
Minimum Load	-	A	None
Load Regulation	-	-	±1%
Line Regulation	-	-	±0.5%
Ripple & Noise (1)	mV	-	1% (for 5V, 2% or 50mV whichever is greater)
Short Circuit Protection	-	-	Foldback
Overvoltage Protection	-	V	Typically 110-130% of nominal, auto recovery
Hold Up Time (Typ)	-	ms	16ms at 115VAC input
LED Indicator	-	-	Green LED = OK
Operating Temperature	-	°C	0 to +70°C with derating/air flow
Storage Temperature	-	°C	-20 to +85°C
Humidity (non condensing)	-	-	10 - 95% RH
Cooling (2)	-	-	Convection/air flow
Withstand Voltage	-	-	Input to Ground 1.5kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.
Isolation Resistance	-	-	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	-	23.52m/s² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)
Shock	-	-	< 196.1 m/s² (20G)
Safety Agency Approvals	-	-	UL/CSA/EN60950-1 (2nd Ed) Class I, CE Mark (LVD)
Conducted & Radiated EMI	-	-	EN55022-B, FCC Class B
Immunity	-	-	EN61000-4-2,-3,-4,-6,-8
Weight (Typ)	-	g	385
Size (WxLxH)	-	mm	127 X 76.2 X 26.6 (including underside components)
Warranty	-	yrs	2


Notes:

- (1) 5V measured with 0.1μF ceramic & 220μF electrolytic at 20MHz BW, all other models measured with 0.1μF & 10uF ceramic electrolytic at 20MHz BW.
(2) 70°C operating with 100LFM air flow.

Model Selector


Model	Output Voltage (V)	Maximum Load (A)	Minimum Load (A)	Ripple and Noise	Voltage Accuracy	Line Regulation	Load Regulation
ZPSA100-5	5V	20A	0A	2%	+/- 1%	+/- 0.5%	+/- 1%
ZPSA100-9	9V	11.2A	0A	1%	+/- 1%	+/- 0.5%	+/- 1%
ZPSA100-12	12V	8.4A	0A	1%	+/- 1%	+/- 0.5%	+/- 1%
ZPSA100-15	15V	6.7A	0A	1%	+/- 1%	+/- 0.5%	+/- 1%
ZPSA100-18	18V	5.6A	0A	1%	+/- 1%	+/- 0.5%	+/- 1%
ZPSA100-24	24V	4.2A	0A	1%	+/- 1%	+/- 0.5%	+/- 1%
ZPSA100-48	48V	2.1A	0A	1%	+/- 1%	+/- 0.5%	+/- 1%

Derating Curve ZPSA100 Series

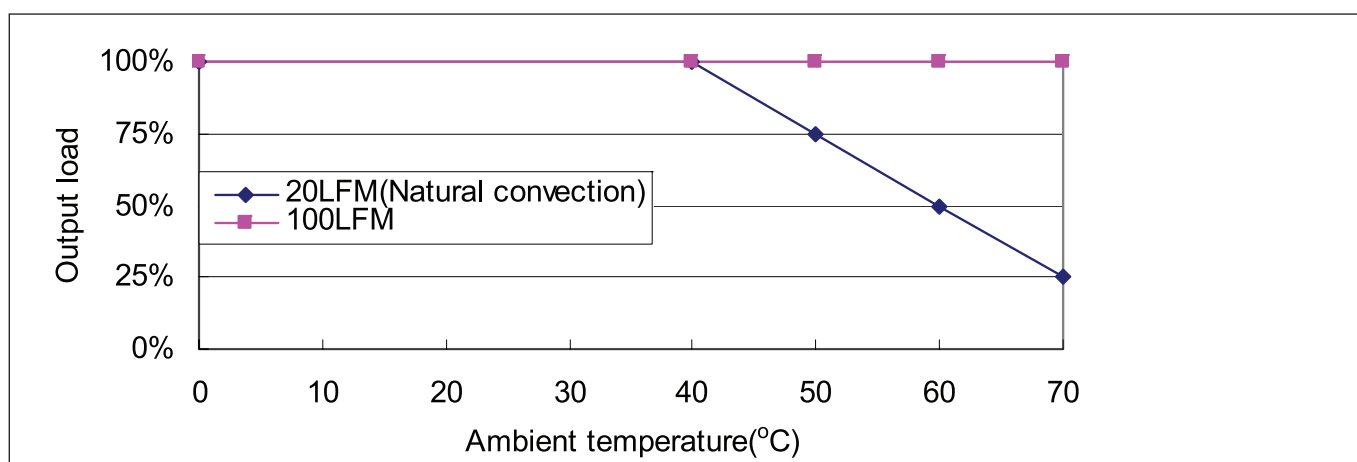

**INTERMEDIATE VOLTAGES AVAILABLE
PLEASE CONSULT SALES**

Outline Drawing ZPSA100 Series

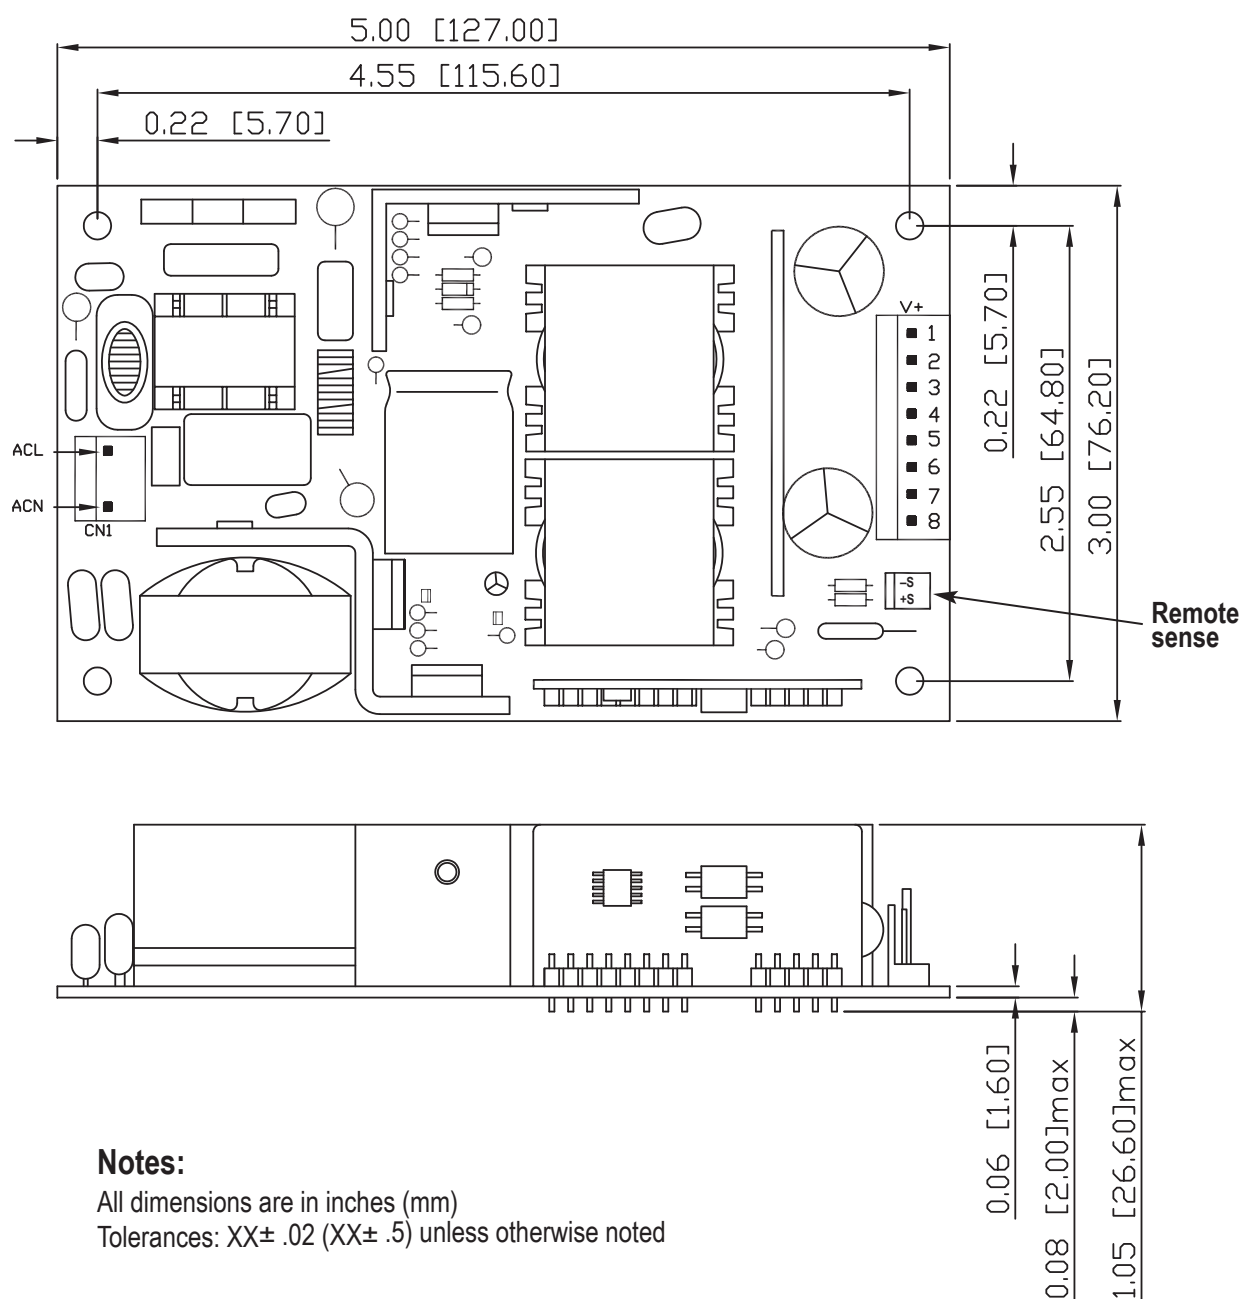

PIN Assignments

Pin#	Function
1	Vout (+)
2	Vout (+)
3	Vout (+)
4	Vout (+)
5	Vout (-)
6	Vout (-)
7	Vout (-)
8	Vout (-)

Input Connector Mates with Molex Housing 09-50-3031 and Molex 2478 Series Crimp Terminal
 Output Connector Mates with Molex Housing 09-50-1081 and Molex 5194 Series Crimp Terminal
 Sense Connector Mates with Molex Housing 22-01-1022 and Molex 2759 or 5159 Crimp Terminal

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

Route de Grivery
ZAC des Delaches
CS 41077
91978 Courtaboeuf Cedex
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz
Givat Hashlosa 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION