
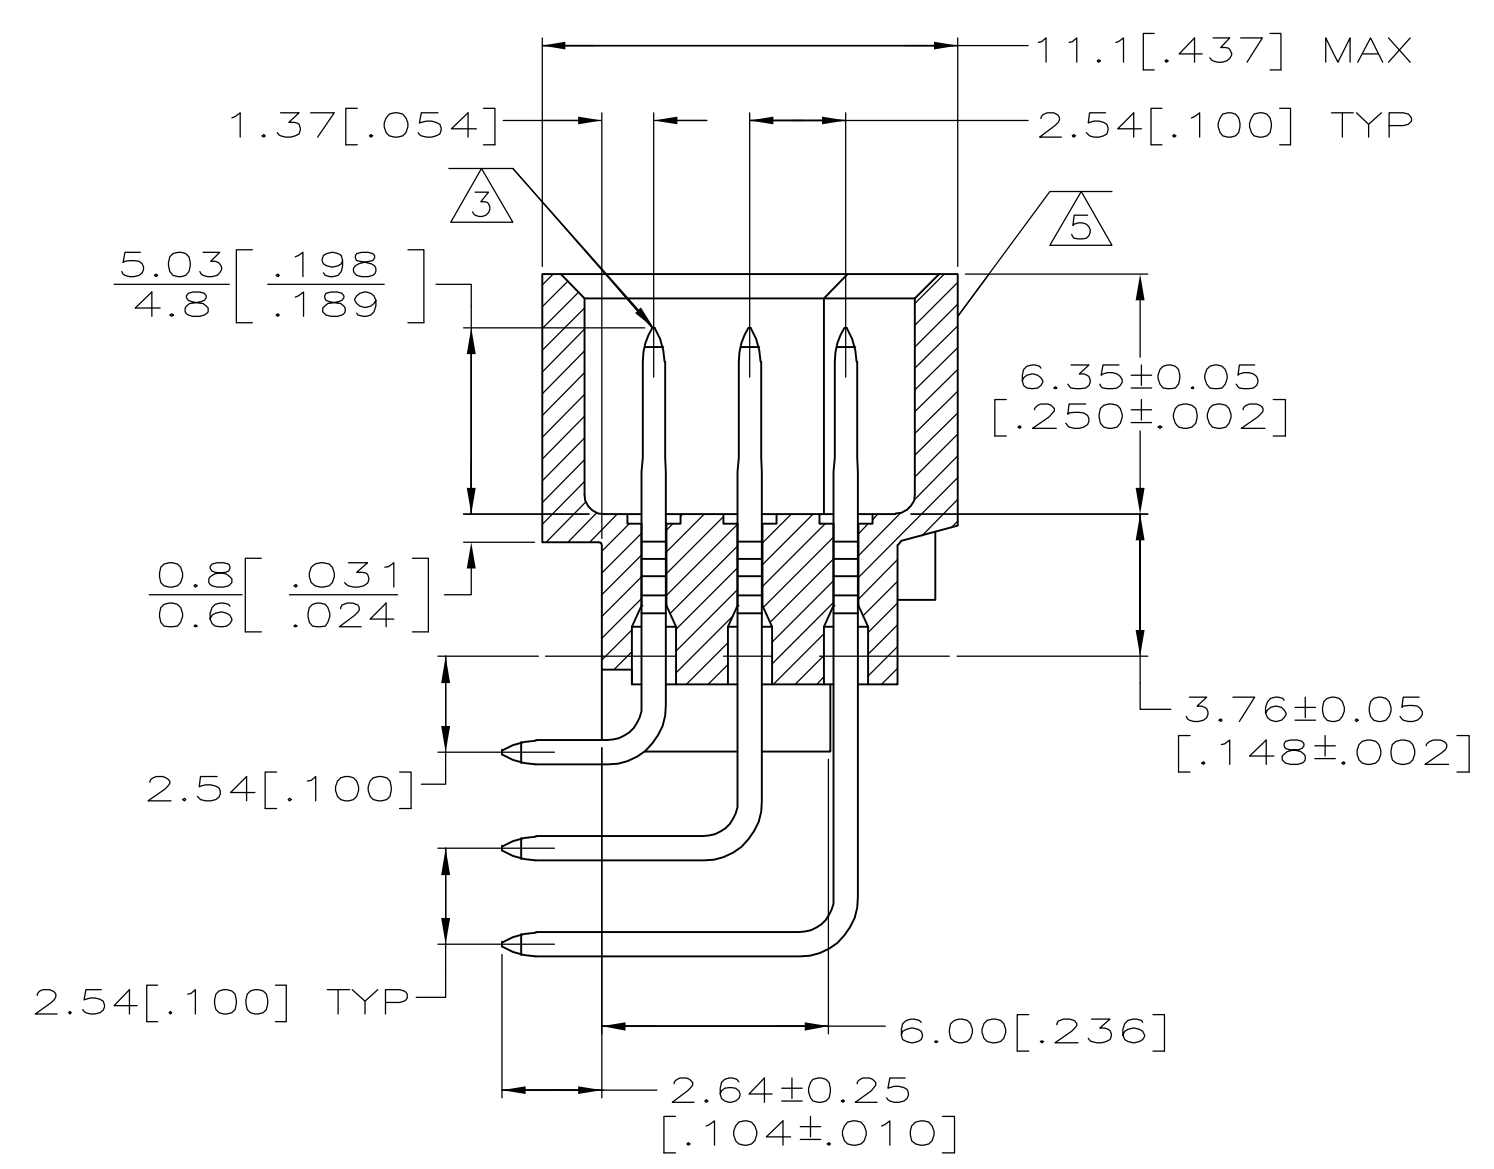
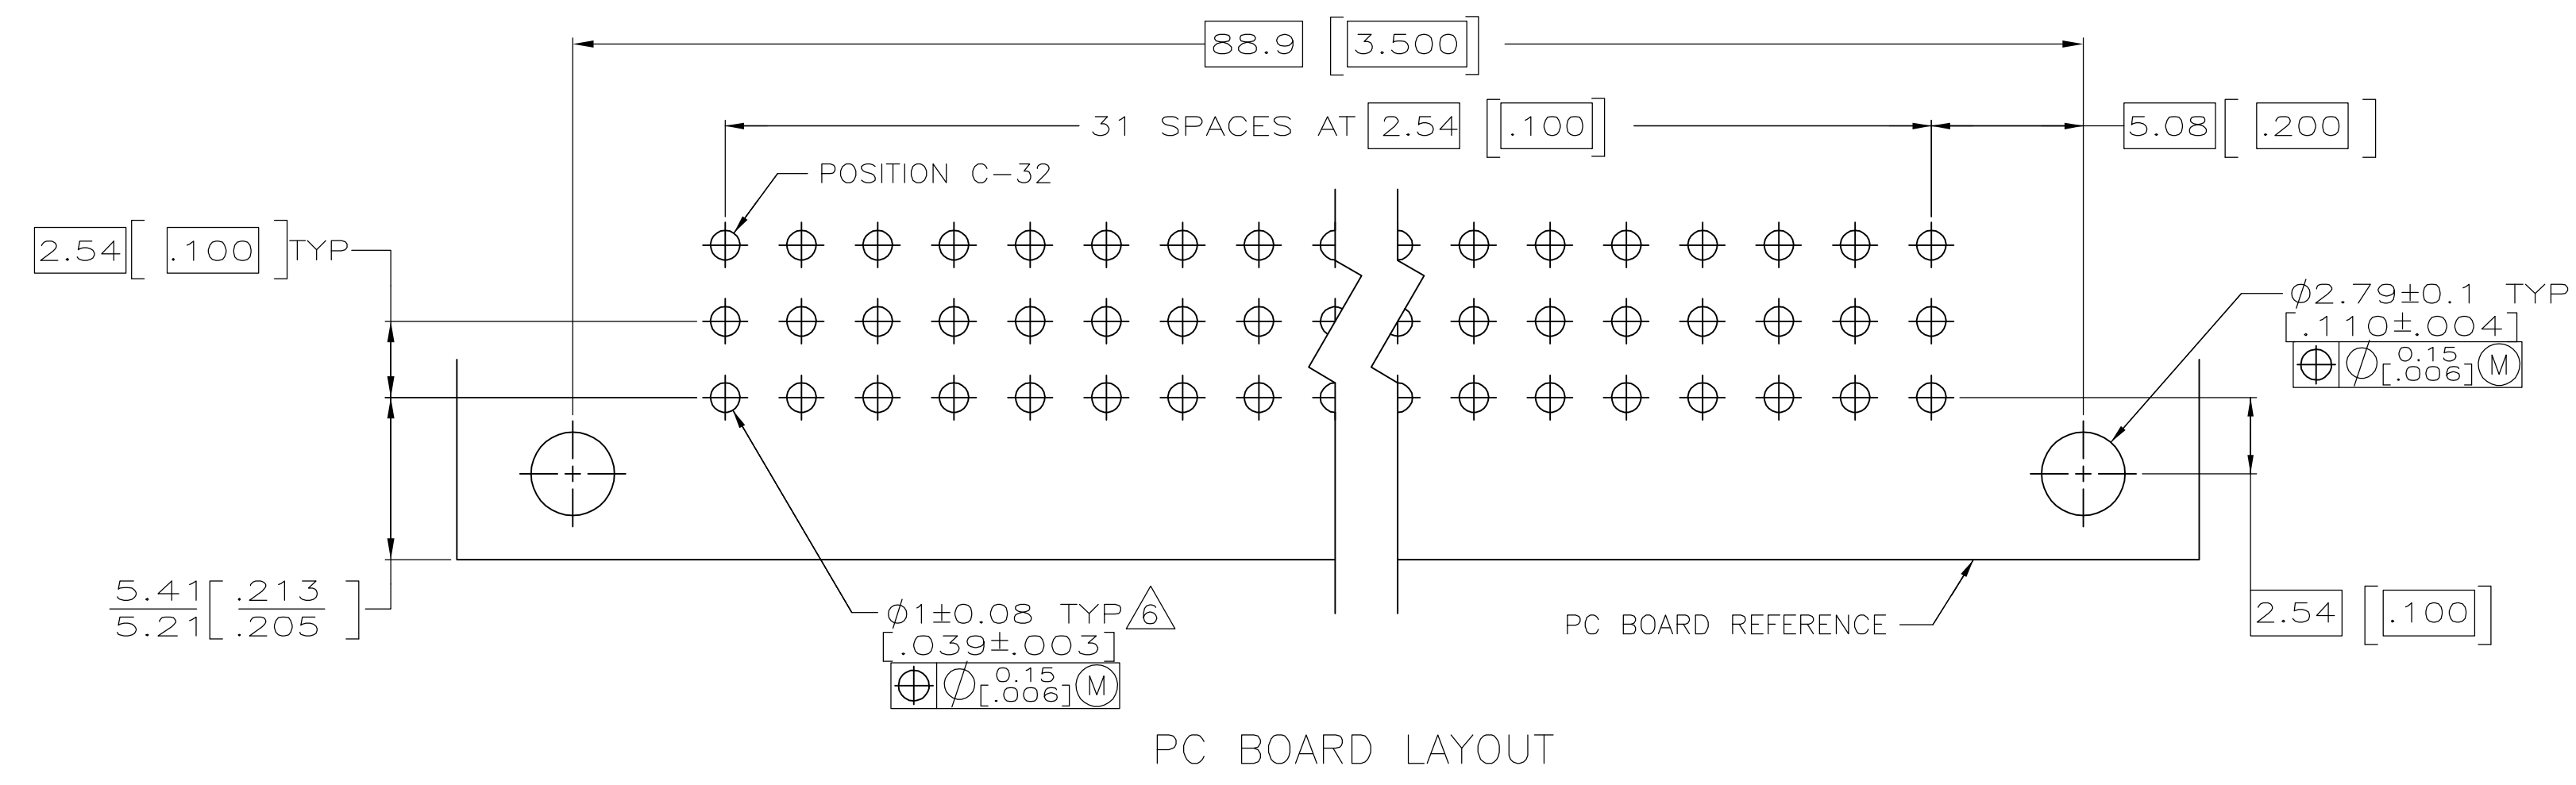
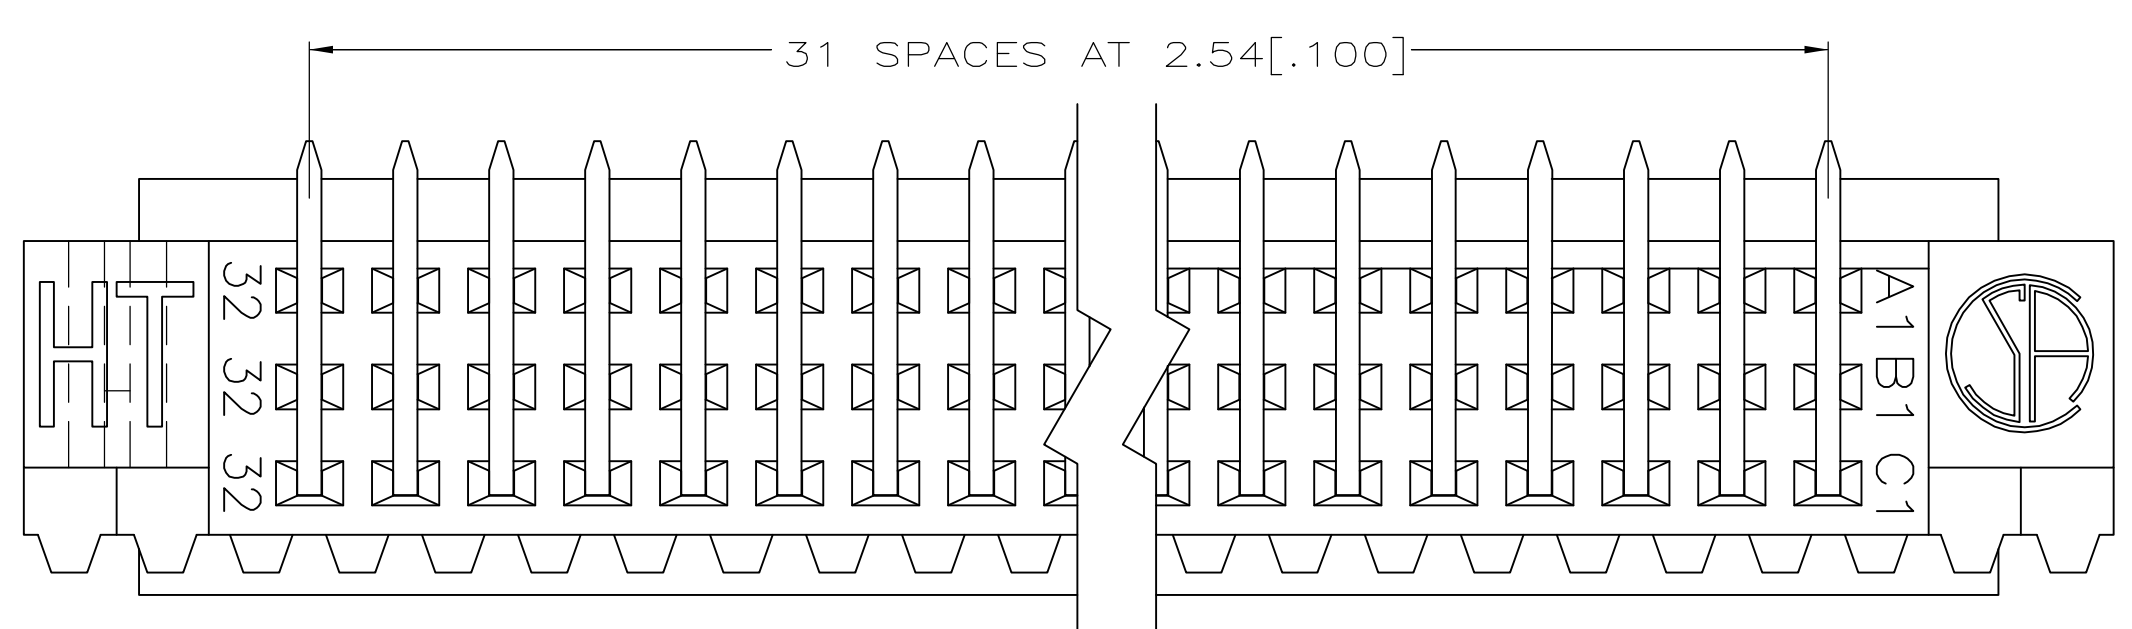
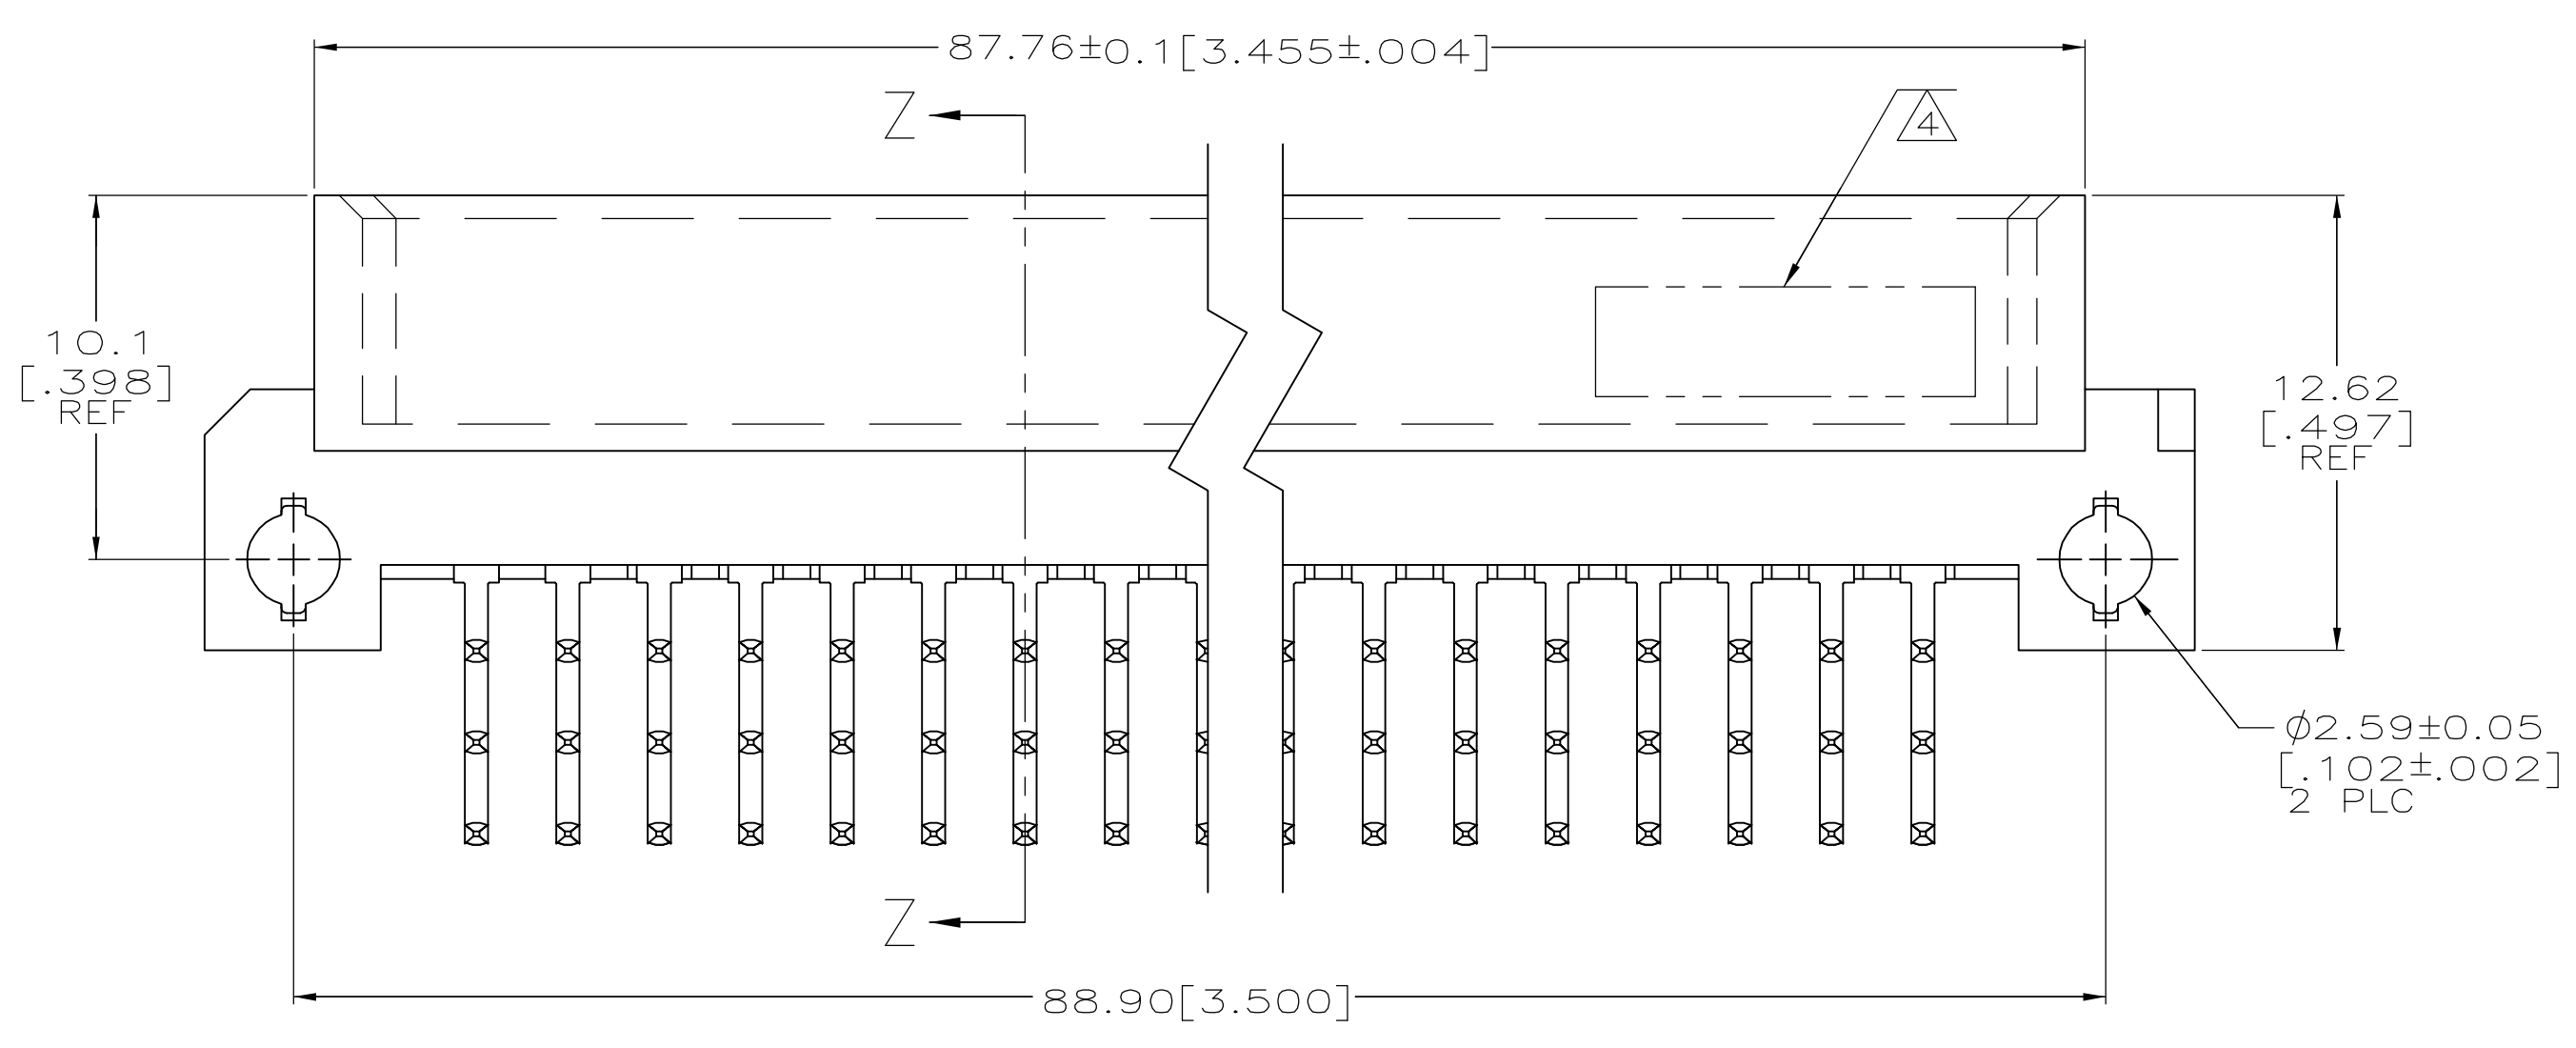
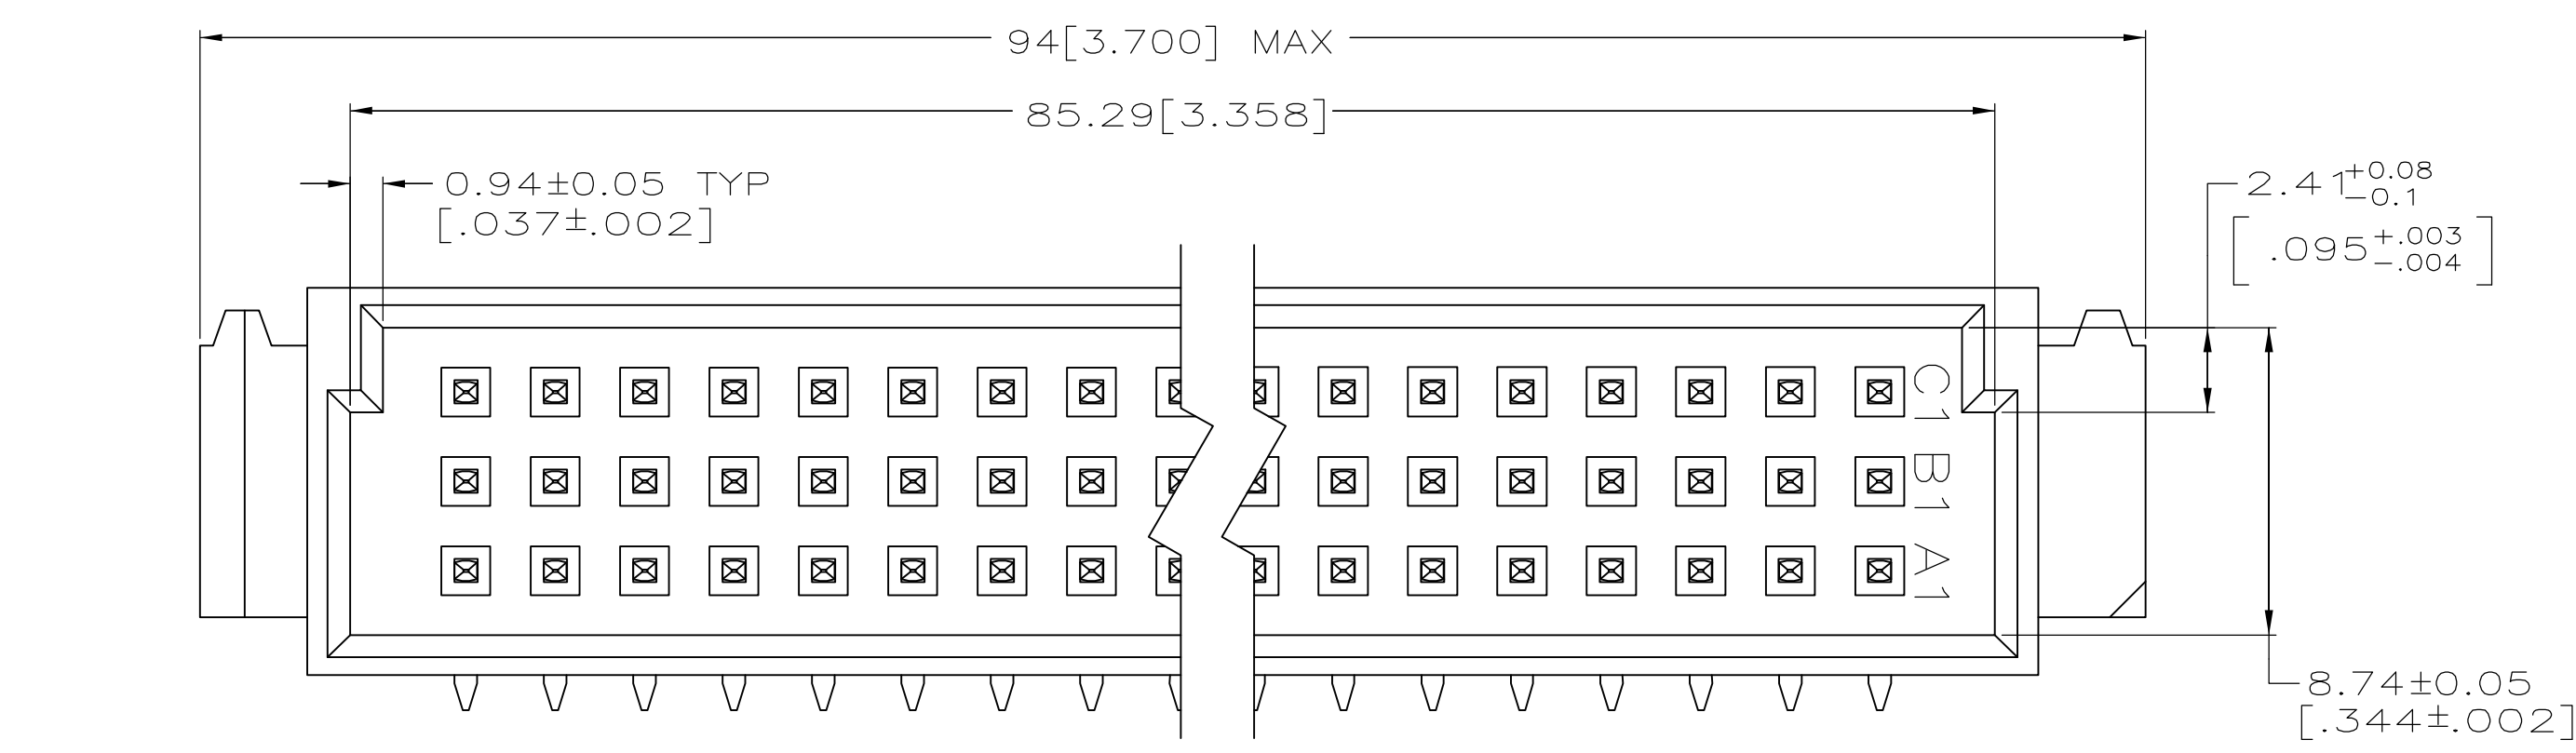


- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 [PART NUMBER, DATE CODE] MARKED THIS APPROXIMATE AREA.
- 5 MARKING ON THIS SIDE.
- 6 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.



SECTION Z-Z

SUPERSEDED BY 5650473-5		1-32	X	X	X	96	7-5650473-5
		1-32	X	X	X	96	5650473-5
		POSITIONS LOADED	C	B	A	NO. OF LOADED POSITIONS	PART NUMBER
			ROWS LOADED				
THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. POLIGNONE CHK A. SHARPE	OSMAYOS OSMAYOS		tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE	NAME ASSEMBLY, PIN EUROCARD, TYPE C, 96 POSITION, .104 SOLDER POST		
	0 PLC ± -	PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO A100779 C=5650473 -			
	1 PLC ± -	APPLICATION SPEC					
	2 PLC ± 0.13[.005]						
	3 PLC ± -						
	4 PLC ± -						
MATERIAL	FINISH	WEIGHT	SCALE 5:1 SHEET 1 OF 1 REV A				
		CUSTOMER DRAWING					