

LOC	DIST	REVISIONS				
AJ	16	P	LTR	DESCRIPTION	DATE	DWN
		A		REVISED PER EC OS14-0150-05	26AUG05	JL

- 1

ZINC PER QQ-Z-363.
- 2

POLYMETHYLPENTENE PER ASTM-D-1238.
- 3

PHOSPHOR BRONZE PER QQ-B-750.
- 4

BRASS PER ASTM-B-453.
- 5



BRASS PER ASTM-B-16.
- 6

NICKEL PLATE PER QQ-N-290,
3.81 μm [.000150] MINIMUM THICK.
- 7


TIN PLATE PER ASTM-B-545,
3.81 μm [.000150] MINIMUM THICK.
- 8

GOLD PLATE PER MIL-G-45204,
1.27 μm [.000050] MINIMUM THICK.
- 9

GOLD PLATE PER MIL-G-45204,
0.76 μm [.000030] MINIMUM THICK.
10. SEE INSTRUCTION SHEET 408-2769.

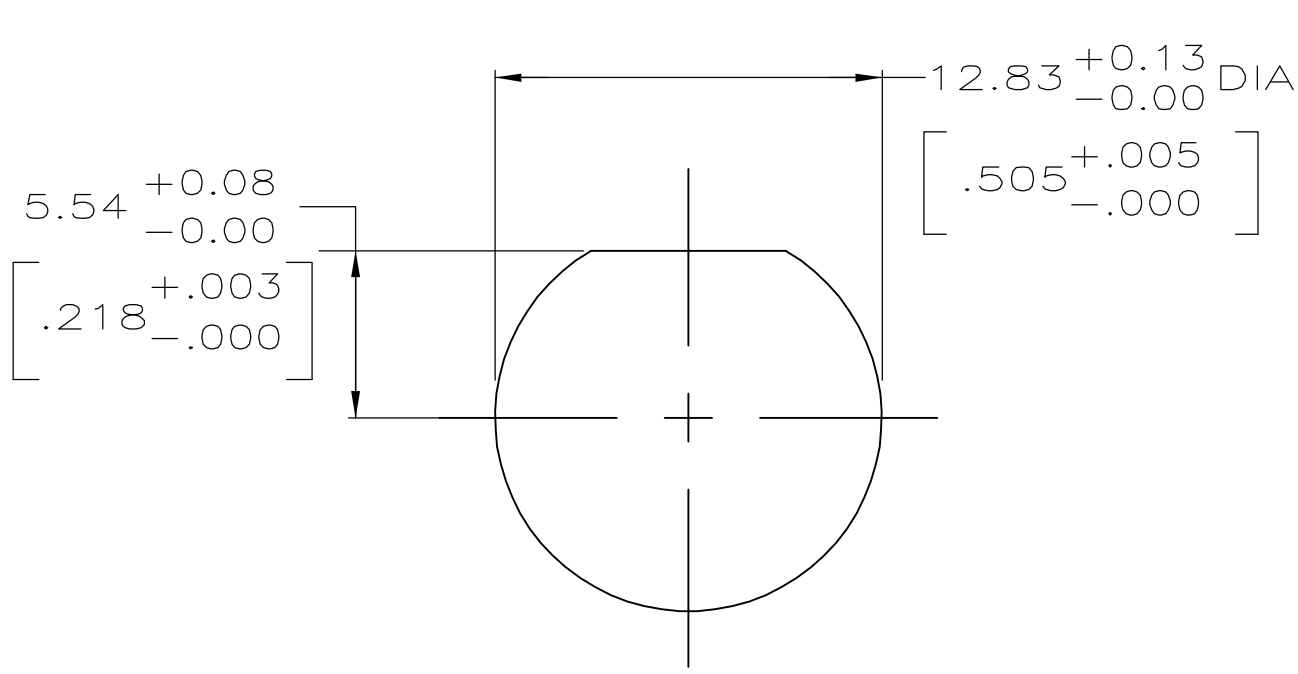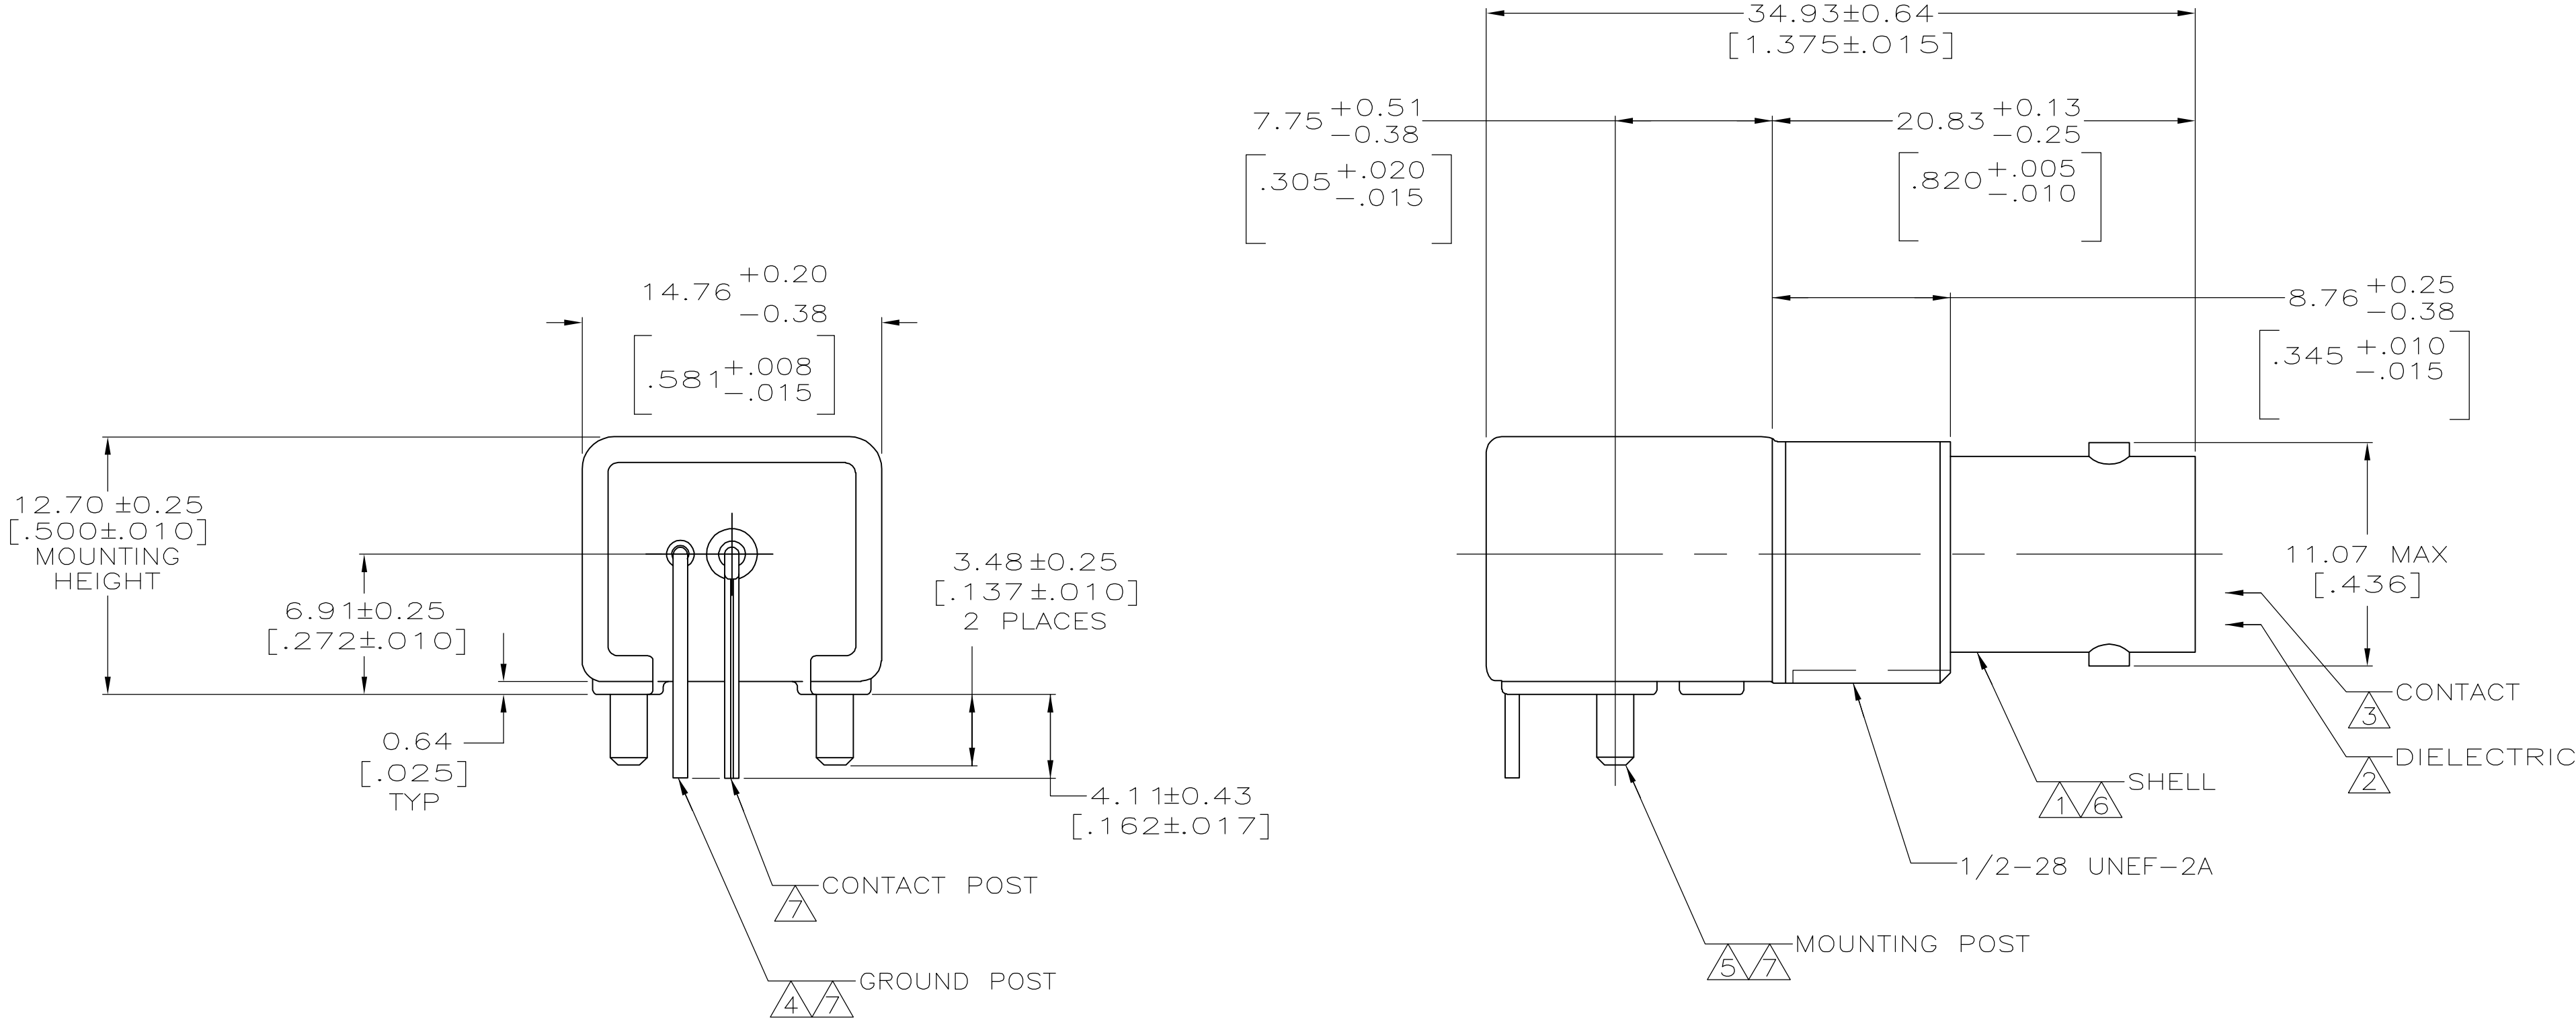

RECOMMENDED PANEL CUTOUT

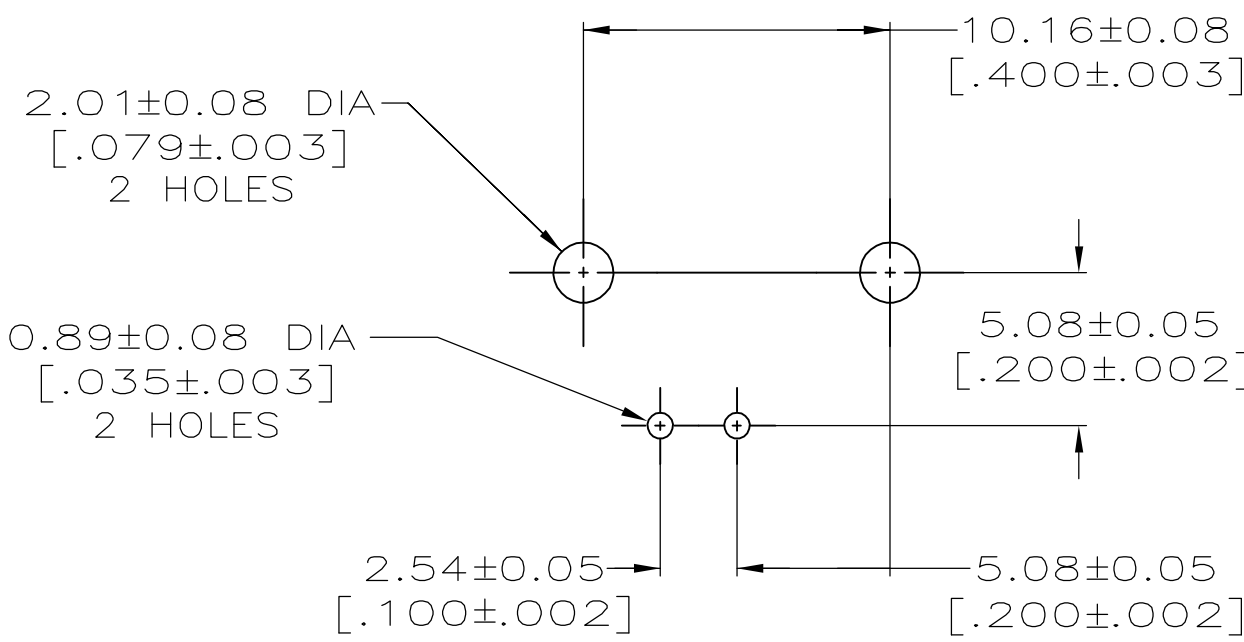

PCB CONFIGURATION

	5413879-2
	5413879-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ-DOCK5 22APR2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
	DIMENSIONS: mm [INCHES]	CHK J. HAVENER 22APR2005	NAME	
		APP'D J. LIPPERT 22APR2005	PRODUCT SPEC	
			108-12078	
			APPLICATION SPEC	
MATERIAL SEE NOTES 1-5		WEIGHT -	SIZE A1	CAGE CODE 00779
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	REV A