

亨晒缙司: [39-01-3083](#)  
 犷忒: Active  
 忒觉: Mini-Fit Jr. Power Connectors  
 提迄: Mini-Fit Jr. Plug Housing, Dual Row without Panel Mount Ears, PA Polyamide Nylon 6/6, UL 94V-2, 8 Circuits

李价:  
 3D槁垲 勿裆觅裁 PK-5559-002 (PDF)  
 囿纹 (PDF) 泱洼忒缙 TS-5556-002 (PDF)  
 亨晒觅裁 PS-45750-001 (PDF) RoHS 诘芝  
 亨晒觅裁 PS-5556-001 (PDF)

Agency Certification


CSA LR19980  
 UL E29179

丁舩  
 亨晒棠旒 厌揚死壹  
 幼刘 5559  
 底用 Power, 缙寺棠, 缙寺缙  
 注毓 Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 series terminals crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current derating information.. Glow Wire Equivalent Part.  
 Molex 核晒 是  
 替迄 Mini-Fit Jr. Power Connectors  
 亨晒后桐 Mini-Fit Jr.  
 UPC 800754203913

件琇  
 斲弁 吧  
 由跣鼓 (替彗吧 \* 8  
 额艳-枸脍 胤婢艳  
 阼燄怨 94V-2  
 郁价屨怨 抛忒  
 滢趴欽洳Glow-Wire棧淞 吧  
 抛揚枏怨 无  
 铿宛抛揚郁低 是  
 村笋-枸脍 尽糞  
 Net Weight 2.305/g  
 衍斲 2  
 勿裆彰忒 衰  
 面棠突裆忒 吧  
 闵踪-揚吉阶面 4.20mm  
 闵踪 - 纒纏阶面 4.20mm  
 肮枏怨吧抛耐价 是  
 台董叡吧 吧  
 近衍馮座茄图 -40±C to +105±C

由气  
 毒解為替矢由沃 13A

村笋修恰  
 替甩亨晒缙司 5559-08P1

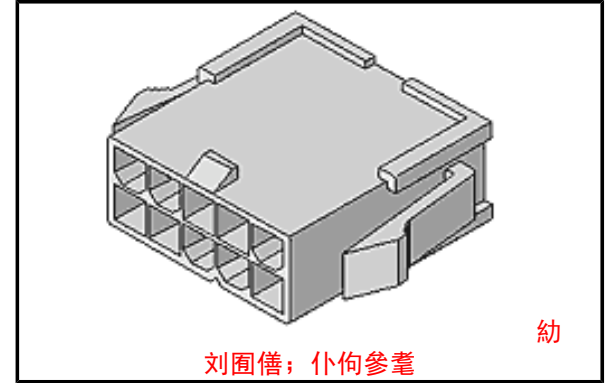

欽齋RoHS掣以 丑图RoHS掣以  
 ELV and RoHS  
 Compliant  
 REACH SVHC  
 Contains SVHC: No  
 Low-Halogen Status  
 Low-Halogen

是吧霁粟刘击肮兴亨晒吧现俞奎欽@

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 為凶步条台袒臬箝吉RoHS 吧亨晒缙司, 為凶步条

诸參閱 皓绝戒仇 详站芄仆尔毓巧亨晒无兴吧  
 具仗奎欽闯颞

圩迎丫幼刘吧袒导雷价  
 5559幼刘

耐抛俐用  
 39-01-2080 Receptacle Housing

台迟揚俐用  
 5558 Mini-Fit Jr. Male Crimp  
 Terminals. 30490 Mini-Fit Male  
 Grounding Crimp Terminals

參耄；圍紋縉司

勿裆覓栽

亨晒覓栽

鎖唯用圍紋

洩洼忒綉

PK-5559-002

PS-45750-001, PS-5556-001

SD-5559-NP1\*

TS-5556-002

This document was generated on 12/19/2014

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION