



## FEATURES

- Intel® Atom™ N270 1.6GHz processor and Intel® 945GSE + ICH7-M chipset
- One 200-pin SO-DIMM supports DDR2 SDRAM up to 2GB
- Analog Display: Up to 2048 x 1536 (QXGA)
- 36mm height supports thin client and DS application
- Fan-less and optional cable-less design for easy maintenance
- Versatile mounting solutions such as Wall and Panel mount (optional)
- Single DC 12V power input for easy system integration
- CF socket for storage

### SYSTEM

CPU	Intel® Atom™ N270 1.6GHz processor
FSB	533 MHz
BIOS	Award BIOS
System Chipset	Intel® 945GSE GMCH integrated GMA 950 Graphics and ICH7-M
System Memory	One 200-pin SO-DIMM supports DDR2 400/533 up to 2GB
SSD	1 x CF
Watchdog Timer	Programmable via S/W from 1sec. to 255min.
H/W Status Monitor	Temperature (CPU and System), Voltage, Case open function

### REAR PANEL

Serial Port	1 x RS232
Display	1 x VGA
USB	4 x USB 2.0
Audio Interface	Line-out and Mic-in
Ethernet	1 x Gigabit Ethernet


### Power Supply Unit

Power Input	DC 12V
Adaptor	AC 100~240V

### MECHANICAL & ENVIRONMENTAL

Operation Temperature	-5~45°C
Storage Temperature	-20~80°C
Relative Humidity	10~90% non-condensing
Dimension (WxDxH)	200x200x36 mm; 7.9"x7.9"x1.4"
Weight	1.1 kg

## REAR I/O

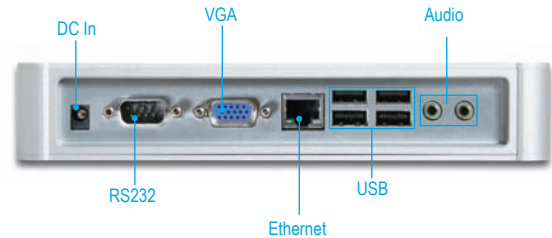

## Brick Concept



## ORDERING GUIDE

- **WEBS-3331-1600**  
System with WADE-8071 (Atom™ N270 1.6GHz) + 2GB DDR2 + 4GB CF
- **WEBS-3331-1601**  
System with WADE-8071 (Atom™ N270 1.6GHz) + 1GB DDR2 + 512MB CF