

## Sensor/Actuator cable - SAC-3P- 5,0-800/M12FS - 1456695

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 3-position, PUR halogen-free, welding sputter-resistant, highly flexible, Gray RAL 7001, free cable end, on Socket straight M12, A-coded, Cable length: 5 m, for robots and drag chains

### Why buy this product

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Flexible: cable supports a high degree of torsion and bending
- ✓ Reliable solution for the body shop as cable is resistant to welding sparks



### Key commercial data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 046356 593052 |
| Weight per Piece (excluding packing) | 150.8 g   |
| Custom tariff number                 | 85444290  |
| Country of origin                    | Poland  |
| Note                                 | Made to Order (non-returnable)  |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |        |
|-----------------------|--------|
| Rated current at 40°C | 4 A    |
| Rated voltage         | 250 V  |
| Number of positions   | 3      |
| Contact resistance    | ≤ 5 mΩ |

# Sensor/Actuator cable - SAC-3P- 5,0-800/M12FS - 1456695

## Technical data

### General

|                              |                               |
|------------------------------|-------------------------------|
| Insulation resistance        | ≥ 100 MΩ                      |
| Coding                       | A - standard                  |
| Standards/regulations        | M12 connector IEC 61076-2-101 |
| Status display               | No                            |
| Protective circuit/component | Unwired                       |
| Surge voltage category       | II                            |
| Pollution degree             | 3                             |
| Insertion/withdrawal cycles  | ≥ 100                         |
| Torque                       | 0.4 Nm (M12 connector)        |

### Material

|   |   |
|---|---|
| Inflammability class according to UL 94 | HB  |
| Contact material                        | CuSn  |
| Contact surface material                | Ni/Au                                       |
| Contact carrier material                | TPU GF                                      |
| Material of grip body                   | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                        | Zinc die-cast, nickel-plated                |
| Sealing material                        | NBR   |

### Cable

|   |  |
|---|--|
| Note  | Due to the extremely robust outer sheath, this cable should only be stripped in 5 cm increments. |
| Cable type                                    | Gray, highly flexible PUR  |
| Cable type (abbreviation)                     | 800  |
| Cable abbreviation                            | Li12Y11Y-HF  |
| Conductor cross section                       | 3x 0.34 mm <sup>2</sup> (signal line)  |
| AWG signal line                               | 22   |
| Conductor structure signal line               | 42x 0.10 mm  |
| Core diameter including insulation            | 1.3 mm ±0.05 mm (signal line)  |
| Wire colors                                   | brown, blue, black   |
| Overall twist                                 | 3 wires, twisted   |
| External sheath, color                        | Gray RAL 7001  |
| External cable diameter D                     | 4.5 mm ±0.2 mm   |
| Minimum bending radius, fixed installation    | 5 x D  |
| Minimum bending radius, flexible installation | 5 x D  |
| Number of bending cycles                      | 15000000   |
| Bending radius                                | 50 mm  |
| Traversing path                               | 0.9 m  |
| Traversing rate                               | 5 m/s  |
| Acceleration                                  | 30 m/s <sup>2</sup>  |
| Torsion force                                 | ± 360 °/m  |
| Cable weight                                  | 28.3 kg/km   |

## Sensor/Actuator cable - SAC-3P- 5,0-800/M12FS - 1456695

### Technical data

#### Cable

|                                 |  |
|---------------------------------|--|
| Outer sheath, material          | PUR  |
| Material conductor insulation   | PES  |
| Conductor material              | Bare Cu litz wires   |
| Insulation resistance           | ≥ 20 MΩ*km   |
| Conductor resistance            | approx. 53 Ω/km  |
| Nominal voltage, cable          | 300 V  |
| Test voltage, cable             | 2000 V   |
| Special properties              | Sheath resistant to welding beads, can be recycled, matt, without adhesion, wear-resistant, flame resistant and self-extinguishing |
|                                 | Free from silicone and cadmium   |
|                                 | Free of substances which would hinder coating with paint or varnish  |
| Flame resistance                | DIN VDE 0472 part 804, test type B   |
|                                 | IEC 60332-1  |
|                                 | in acc. with UL FT-2   |
| Halogen-free                    | The cable is halogen-free  |
| Resistance to oil               | According to VDE 0250 Part 407   |
| Other resistance                | Highly resistant to acids, alkaline solutions and solvents   |
| Ambient temperature (operation) | -40 °C ... 90 °C (cable, fixed installation)   |
|                                 | -30 °C ... 90 °C (cable, flexible installation)  |
|                                 | to 120 °C (for 3000 h)   |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |

# Sensor/Actuator cable - SAC-3P- 5,0-800/M12FS - 1456695

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31251501 |
|-------------|----------|

## Approvals

### Approvals

### Approvals

UL Listed / cUL Listed / EAC / cULus Listed

### Ex Approvals

### Approvals submitted

## Approval details

|                    |       |
|--------------------|-------|
| UL Listed          |       |
| Nominal current IN | 4 A   |
| Nominal voltage UN | 300 V |

|                    |       |
|--------------------|-------|
| cUL Listed         |       |
| Nominal current IN | 4 A   |
| Nominal voltage UN | 300 V |

|     |
|-----|
| EAC |
|-----|

|              |
|--------------|
| cULus Listed |
|--------------|

## Accessories

### Accessories

Protective cap

# Sensor/Actuator cable - SAC-3P- 5,0-800/M12FS - 1456695

## Accessories

Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



---

## Screwdriver tools

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and for M12 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive

---

## Torque tool

Torque screwdriver - TSD 04 SAC - 1208429




Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

---


## Drawings

Schematic diagram



Pin assignment M12 socket, 3-pos., A-coded, view female side


Cable cross section




Gray, highly flexible PUR [800]

## Sensor/Actuator cable - SAC-3P- 5,0-800/M12FS - 1456695

Dimensioned drawing

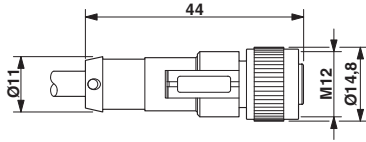

Circuit diagram

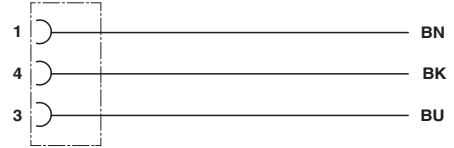

M12 x 1 socket, straight

Contact assignment of the M12 socket