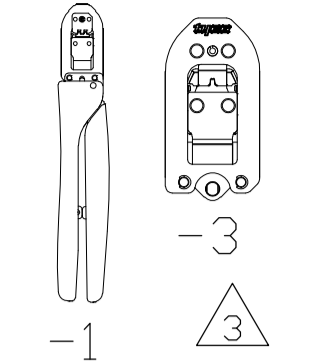



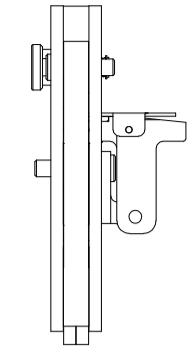



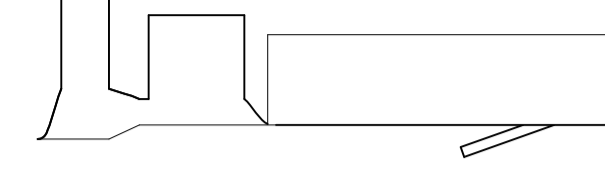
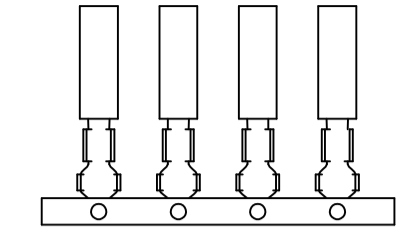




TOOL NUMBER 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSULATION ADJUSTER 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 		CONTACT DESCRIPTION	APPLIC. SPECIF.
							LOOSE PIECE 	STRIP FORM 		
2063848-1	0.20-0.35 [24-22]	1.50-2.55 [.059-.100]	NO	NO	3.50 ± 0.50 [.138 ± .020]	0.89-0.99 [.035-.039]	170203-2	-	187 FASTON contacts	114-5013
2063848-3	0.50-0.56 [20]	1.95-2.60 [.077-.102]				1.00-1.10 [.039-.043]				
2063760-1	0.20-0.35 [24-22]	1.50-1.90 [.059-.075]	NO	NO	4.5 ± 0.5 [.177 ± .020]	0.90-1.05 [.035-.041]	170330-()	170324-()	.187 SERIES POSITIVE LOCK RECEPTACLE	114-5041
2063760-3	0.50-0.53 [20]	2.00-2.70 [.079-.106]				1.00-1.13 [.039-.047]				

THIS DRAWING IS A CONTROLLED DOCUMENT. DRAW NO 1583005

 LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.

2. AMP, CERTI-CRIMP, and FASTON ARE TRADEMARKS.

 -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY. -3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.


4. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET

DWN: M. YOUNGER 21FEB2012		MATERIAL: -	HEAT TREAT: -
CHK: B.A.WOLFE 22FEB2012		TE Connectivity	
APVD: B.A. WOLFE 22FEB2012		NAME: CERTI-CRIMP II TOOL DATA SHEET FASTON & POSITIVE LOCK CONTACT FAMILY	
SCALE: -		SIZE: A1	DRAWING NO: 1583005
SHEET: 2		OF: 2	REV: D4

REVISION	DATE	DWN	APVD	DESCRIPTION
-	-	-	-	SEE SHEET 1

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± .-	1 PLC ± .-
1 PLC ± .-	2 PLC ± .-
2 PLC ± .-	3 PLC ± .-
3 PLC ± .-	4 PLC ± .-
4 PLC ± .-	

ANGLES: -	SURFACE TEXTURE: 
-----------	--

LOC A
DIST 00