

**W-Series**  
**WDU 1.5/BLZ 5.08****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

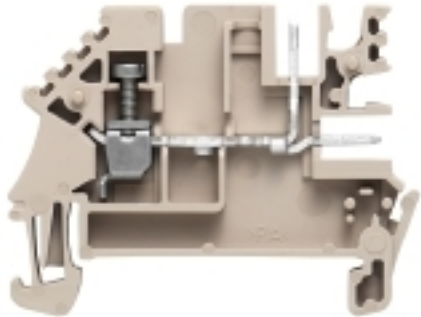

The idea is simple:

One terminal strip for the functional unit and one plug-in connector for the cable harness. All that remains to be done is to clip the two units together during final assembly. Finished!

**General ordering data**

|            |                                                                                              |
|------------|----------------------------------------------------------------------------------------------|
| Type       | WDU 1.5/BLZ 5.08                                                                             |
| Order No.  | <a href="#">1577340000</a>                                                                   |
| Version    | W-Series, Feed-through terminal, Rated cross-section: 1.5 mm <sup>2</sup> , Screw connection |
| GTIN (EAN) | 4008190142728                                                                                |
| Qty.       | 100 pc(s).                                                                                   |

**W-Series**  
**WDU 1.5/BLZ 5.08**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

|                          |         |                 |            |
|--------------------------|---------|-----------------|------------|
| Width                    | 5.08 mm | Width (inches)  | 0.2 inch   |
| Height                   | 49 mm   | Height (inches) | 1.929 inch |
| Depth                    | 37 mm   | Depth (inches)  | 1.457 inch |
| Depth including DIN rail | 37.5 mm | Weight          | 3.2 g      |
| Net weight               | 4.55 g  |                 |            |

**Temperatures**

|                                  |        |                                  |        |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 120 °C |
|----------------------------------|--------|----------------------------------|--------|

**Material data**

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | Dark Beige |
| UL 94 flammability rating | V-0   |        |            |

**System specifications**

|                                   |                                                                                                                      |                               |     |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------|-----|
| Version                           | 1 plug-in connection -<br>2 plug-in connections,<br>for screwable cross-<br>connection, One end<br>without connector | End cover plate required      | Yes |
| Number of potentials              | 1                                                                                                                    | Number of levels              | 1   |
| No. of clamping points per level  | 3                                                                                                                    | Number of potentials per tier | 1   |
| Levels cross-connected internally | No                                                                                                                   | PE connection                 | No  |
| Mounting rail                     | TS 35                                                                                                                | N-function                    | No  |
| PE function                       | No                                                                                                                   | PEN function                  | No  |

**Additional technical data**

|                          |       |                             |         |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | No    | Number of similar terminals | 1       |
| Open sides               | right | Type of mounting            | Snap-on |

**CSA rating data**

|                               |           |                               |        |
|-------------------------------|-----------|-------------------------------|--------|
| Certificate No. (CSA)         | 12400-260 | Current size B (CSA)          | 10 A   |
| Current size C (CSA)          | 10 A      | Current size D (CSA)          | 10 A   |
| Voltage size B (CSA)          | 300 V     | Voltage size C (CSA)          | 300 V  |
| Voltage size D (CSA)          | 300 V     | Wire cross section max. (CSA) | 12 AWG |
| Wire cross section min. (CSA) | 26 AWG    |                               |        |

**Conductors for clamping (additional connection)**

|                                                                                                   |                     |
|---------------------------------------------------------------------------------------------------|---------------------|
| Conductor cross-section, flexible plus<br>plastic collar DIN 46228/1, further<br>connection, max. | 2.5 mm <sup>2</sup> |
|---------------------------------------------------------------------------------------------------|---------------------|

**W-Series**  
**WDU 1.5/BLZ 5.08**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Conductors for clamping (rated connection)**

|                                                                                                                               |                      |                                                                                                                                       |                     |
|-------------------------------------------------------------------------------------------------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| Blade size                                                                                                                    | 0.6 x 3.5 mm         | Clamping range, rated connection, max.                                                                                                | 4 mm <sup>2</sup>   |
| Clamping range, rated connection, min.                                                                                        | 0.13 mm <sup>2</sup> | Clamping screw                                                                                                                        | M 2.5               |
| Connection direction                                                                                                          |                      | Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min. | 0.5 mm <sup>2</sup> |
|                                                                                                                               | on side              | Number of connections                                                                                                                 | 3                   |
| Gauge to IEC 60947-1                                                                                                          | A3                   | Tightening torque, max.                                                                                                               | 0.6 Nm              |
| Stripping length                                                                                                              | 10 mm                | Torque level with DMS electric screwdriver                                                                                            | 1                   |
| Tightening torque, min.                                                                                                       | 0.4 Nm               | Wire connection cross section AWG, max.                                                                                               | AWG 12              |
| Type of connection                                                                                                            | Screw connection     | Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.                             | 2.5 mm <sup>2</sup> |
| Wire connection cross section AWG, min.                                                                                       | AWG 26               | Wire connection cross section, finely stranded, max.                                                                                  | 4 mm <sup>2</sup>   |
| Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.                     | 0.5 mm <sup>2</sup>  | Wire connection cross section, solid core, min. rated connection                                                                      | 0.5 mm <sup>2</sup> |
| Wire connection cross section, solid core max. rated connection                                                               | 4 mm <sup>2</sup>    | Wire connection cross section, stranded, rated connection, min.                                                                       | 1.5 mm <sup>2</sup> |
| Wire connection cross section, stranded, rated connection, max.                                                               | 4 mm <sup>2</sup>    | Wire connection cross-section, finely stranded, min.                                                                                  | 0.5 mm <sup>2</sup> |
| Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max. | 2.5 mm <sup>2</sup>  |                                                                                                                                       |                     |

**Dimensions**

|              |         |
|--------------|---------|
| TS 35 offset | 31.5 mm |
|--------------|---------|

**PE rating data**

|              |    |
|--------------|----|
| PEN function | No |
|--------------|----|

**Rating data**

|                                 |                                             |                                              |         |
|---------------------------------|---------------------------------------------|----------------------------------------------|---------|
| Rated cross-section             | 1.5 mm <sup>2</sup>                         | Rated voltage                                | 250 V   |
| Rated current                   | 16 A                                        | Current at maximum wires                     | 16 A    |
| Standards                       | IEC 61210, In accordance with IEC 60947-7-1 | Volume resistance according to IEC 60947-7-x | 1.83 mΩ |
| Rated impulse withstand voltage | 4 kV                                        | Pollution severity                           | 3       |

**UL rating data**

|                                         |        |                                         |        |
|-----------------------------------------|--------|-----------------------------------------|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 12 AWG |
| Conductor size Factory wiring min. (UR) | 26 AWG | Conductor size Field wiring max. (UR)   | 12 AWG |
| Conductor size Field wiring min. (UR)   | 22 AWG | Current size B (UR)                     | 20 A   |
| Current size C (UR)                     | 20 A   | Current size D (UR)                     | 5 A    |
| Voltage size B (UR)                     | 300 V  | Voltage size C (UR)                     | 300 V  |
| Voltage size D (UR)                     | 600 V  |                                         |        |

**W-Series**  
**WDU 1.5/BLZ 5.08**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Classifications**

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC000897    | ETIM 4.0   | EC000897    |
| ETIM 5.0   | EC000897    | ETIM 6.0   | EC000897    |
| UNSPSC     | 30-21-18-11 | eClass 5.1 | 27-14-11-20 |
| eClass 6.2 | 27-14-11-20 | eClass 7.1 | 27-14-11-20 |
| eClass 8.1 | 27-14-11-20 | eClass 9.0 | 27-14-11-20 |

**Product information**

|                                 |                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Descriptive text ordering data  | WDU 1.5 BLA Order no. 1577260000 (100 pcs.). Techn. data same as WDU 1.5 BLZ.                                                                                                         |
| Descriptive text technical data | Dimensions with female header BLZ: length 57.5 mm / height 55.5 mm. 2.5 mm <sup>2</sup> conductor with wire-end ferrule with plastic collar, only with order No. 1333100000, QTY 500. |
| Descriptive text accessories    | The WBB with peg (order number 1068260000) can be used for direct mounting on both sides. Cross-connections, see section "W series accessories".                                      |

**Approvals**

Approvals




ROHS

Conform

### W-Series WDU 1.5/BLZ 5.08

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

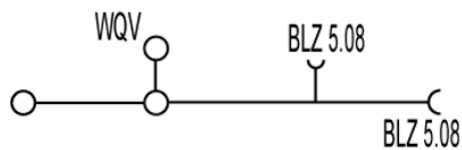

# Addresses worldwide

Let's connect.

## AE United Arab Emirates

Weidmüller Middle East FZE  
Warehouse Q3-79  
SAIF-Zone  
P.O. BOX 8591  
Sharjah  
Telephone number +971 65572723  
Fax number +971 65572724  
wme.info@weidmueller.com

## AO Angola

Please contact  
Phambili Interface  
South Africa

## AR Argentina

CPI SA  
Bauness 2660  
C1431DOF Buenos Aires  
Telephone number +54 11 4523 8008  
Fax number +54 11 4522 0546  
info@cpi.com.ar  
www.cpi.com.ar

## AT Austria

Weidmüller GmbH  
IZ NOE Süd Straße 2b, Obj  
M 59  
2355 Wiener Neudorf  
Telephone number +43 2236 67080  
Fax number +43 2236 6708-899  
office.at@weidmueller.com  
www.weidmueller.com

## AU Australia

Weidmüller Pty. Ltd.  
PO BOX 6944  
Huntingwood 2148  
Huntingwood Drive 43  
Huntingwood NSW 2148  
Telephone number +61 2 9671 9999  
Fax number +61 2 9671 9911  
info@weidmuller.com.au  
www.weidmuller.com.au

## AZ Azerbaijan

Representative Office  
Weidmüller Interface  
Demirchi Tower, 4th floor  
37, Khojali ave.  
AZ 1025 Baku  
Telephone number +994 12 488 80 36  
Fax number +994 12 488 80 37  
rashad.mahmudov@weidmueller.com

## BA Bosnia and Herzegovina

Please contact  
our Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
Serbia  
  
or  
  
BIG electric d.o.o  
Mladena Stojanovića 117A  
78000 Banja Luka  
Telephone number +387 51926277  
Fax number +387 51926277  
bigelectric@blic.net  
www.bigelectric.ba

## BE Belgium

Weidmüller Benelux B. V.  
Mechelsesteenweg 519 bus  
6 en 7  
1930 Nossegem  
Telephone number +32 2 752 40 70  
Fax number +32 2 751 36 06  
info@weidmueller.be  
www.weidmueller.be

## BG Bulgaria

Weid-Bul EOOD  
Bul. "Kliment Ohridski" 13  
1756 Sofia  
Telephone number +359 2 963 2560  
Fax number +359 2 963 1098  
sofia@weidbul.com  
www.weidbul.com

## BH Bahrain

Khayber Trading Company  
P.O Box 1976  
Manama  
Telephone number +973 720747  
Fax number +973 720331  
khayber@batelco.com.bh

## BR Brazil

Weidmüller Conexel do Brasil  
Conexões Elétricas Ltda.  
Av. Presidente Juscelino, 642  
- Piraporinha  
Diadema, São Paulo  
09950-370  
Telephone number +55 (11) 4366-9600  
Fax number +55 (11) 4362-1677  
vendas@weidmueller.com.br  
www.weidmueller.com.br

## BW Botswana

Please contact  
Phambili Interface  
South Africa

## BY Belarus

TECHNIKON Ltd.  
Nezavisimosti pr. 177-9  
220125 Minsk  
Telephone number +375 17 393-11-77  
Fax number +375 17 3930080  
wm@technikon.by

## CA Canada

W Interconnections Canada  
Inc.  
10 Spy Court  
Markham Ontario L3R 5H6  
Telephone number +1 (905) 475-1507 Ext. 9836  
Fax number +1 (905) 475-2798  
support@weidmuller.ca  
www.weidmuller.ca

## CG Congo

Please contact  
Phambili Interface  
South Africa

## CH Switzerland

Weidmüller Schweiz AG  
Rundbuckstraße 2  
8212 Neuhausen am  
Rheinfall SH  
Telephone number +41 52 674 07 07  
Fax number +41 52 674 07 08  
info@weidmueller.ch  
www.weidmueller.ch

## CL Chile

ATS- INTECH  
Maria Luisa Santander 0475  
Santiago  
Providencia 7500859  
Telephone number +56 2 341 1271  
Fax number +56 2 341 1275  
felipe@atsintech.com  
www.atsintech.com  
  
CPI CHILE LTDA  
Av. Presidente Frei Montalva  
6001, 47 complejo el cortijo  
Santiago - Conchalí  
Telephone number +562 963 8440  
Fax number +562 963 8440  
cpi@cpichile.cl  
www.cpichile.cl

## CN China

Weidmüller Interface  
(Shanghai) Co. Ltd.  
100 Yutong Road  
25 F. BM Intercontinental  
Business Center  
200070 Shanghai  
Telephone number +86 21-22195008  
Fax number +86 21-22195009  
customer.hotline@weidmueller.com.cn  
www.weidmueller.com.cn

## CO Colombia

Automatización Avanzada  
S. A.  
Carrera 97 No., 24 c - 23  
Bodega 4  
110911 Bogotá-D.C.  
Telephone number +57 (1) 547-8510  
Fax number +57 (1) 422-3044  
comercial@  
automatizacionavanzada.com  
www.  
automatizacionavanzada.com

## CR Costa Rica

ELVATRON S. A.  
la Uruca 400 Norte Banco  
Costa Rica  
San Jose Costa Rica  
Telephone number +506 2961-060  
Fax number +506 5200-609  
dirk.haase@elvatron.com  
www.elvatron.com

## CZ Czech Republic

Weidmüller s.r.o.  
Lomnického 5/1705  
140 00 Praha 4  
Telephone number +420 244 001 400  
Fax number +420 244 001 499  
office@weidmueller.cz  
www.weidmueller.cz

## DE Germany

Weidmüller GmbH & Co. KG  
Ohmstraße 9  
32758 Detmold  
Postfach 30 54  
32720 Detmold  
Telephone number +49 5231 1428-0  
Fax number +49 5231 14-292083  
weidmueller@weidmueller.de  
www.weidmueller.de

## DK Denmark

Weidmüller Danmark  
Vallensbækvej 18A  
2605 Brøndby  
Telephone number +45 27747800  
kundeservice@weidmueller.dk  
www.weidmueller.dk

## DZ Algeria

SARL INTER ELECTRIC  
1a Angles des Rues Okba Ibn  
Nafaa et Hassi Beida  
2300 Annaba  
Telephone number  
Fax number  
contact@inter-electric.com

## EC Ecuador

Elsystec S. A., Electricidad  
Sistemas y Tecnología  
Vasco de Contreras N35-251  
y Mañosa  
Quito - Pichincha  
Telephone number +593 22456510  
Fax number +593 22456755  
Elsystec@uio.satnet.net

## EE Estonia

Please contact  
our Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
Latvia  
  
or

Soots Interface OÜ  
Pärnu mnt 142  
11317 Tallinn  
Telephone number +372 609 6933  
Fax number  
info@sootsinterface.ee  
www.sootsinterface.ee

## EG Egypt

Standard Electric (OMEGA)  
1, Abdelhamid Badawy Street  
Heliopolis  
Cairo  
Telephone number +202 21805111  
Fax number +202 21805600  
stdelec@rite.com

## ES Spain

Weidmüller, S. A.  
Narcís Monturiol 11-13, Pol.  
Ind. Sudoeste  
8960 Sant Just  
Desvern - Barcelona  
Telephone number +34 934 803 386  
Fax number +34 933 718 055  
weidmuller@weidmuller.es  
www.weidmuller.es

## FI Finland

Weidmüller Suomi,  
Weidmüller Aktiebolagetin  
sivuliike  
Koy Plaza Vivace  
Äyrtie 8C  
FI 1510 Vantaa  
Telephone number +358 20 7351300  
Fax number +358 800 114 667  
asiakaspalvelu@weidmuller.fi  
www.weidmuller.fi

## FR France

Weidmüller E. U. R. L.  
12, Chaussée Jules César  
BP 263 Osny  
95523 Cergy-Pontoise Cedex  
Telephone number +33 1 34 24 55 00  
Fax number +33 1 34 24 55 01  
mail@weidmuller.fr

## GB Great Britain

Weidmüller Ltd.  
Klippon House  
Centurion Court Office Park,  
Meridian East, Meridian  
Business Park  
Leicester  
LE19 1TP  
Telephone number +44 116 282 3470  
Fax number +44 116 289 3582  
marketing@weidmuller.co.uk  
www.weidmuller.co.uk

## GE Georgia

Please contact  
our Representative Office  
Weidmüller Interface  
Azerbaijan.

## GH Ghana

Please contact  
our Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
South Africa.

## GR Greece

G.A. Solutions  
Ippokratous 11 Metamorfosi  
144 52 Athen  
Telephone number +30 210 2823233  
Fax number +30 210 2823233  
info@weidmuller.gr  
www.weidmuller.gr

## GT Guatemala

Prestelectro, Prestegard  
Electro, S.A.  
Avenida Petapa 44-22,  
Zona 12  
Guatemala City  
Telephone number +502 2442-3346  
Fax number +502 2476-8945  
ventas@prestelectro.com

## HK Hong Kong

Weidmüller (Hong Kong)  
Limited Co. Ltd.  
Unit 1617, Metropolis Tower  
No. 10 Metropolis Drive,  
Hunghom, Kowloon  
Telephone number +852 3154 8088  
Fax number +852 31548099  
Info-hk@weidmueller.com.hk

## HR Croatia

ElektroPARTNER d.o.o.  
Slavonska avenija 24/6  
HR-10000 Zagreb  
Telephone number +385 (1) 6184 793  
Fax number +385 (1) 6184 795  
elektropartner@zg.t-com.hr  
www.elektropartner.hr

## HU Hungary

Weidmüller Kereskedelmi Kft.  
Budapest  
Gubacsi út 6.  
1097  
Telephone number +36 1 382 7700  
Fax number +36 1 382 7701  
info@weidmueller.hu  
www.weidmueller.hu

## ID Indonesia

PT. Nego Electrindo  
Ruko Mega Grosir Cempaka  
Mas Blok I No. 20 – 22  
Jakarta 10640  
Telephone number +62 21 42882255  
Fax number +62 21 42882266  
sales@negoelectrindo.co.id

## IE Ireland

Please contact  
Weidmüller Ltd.  
Great Britain

## IL Israel

A. U. Shay Ltd.  
23/25, Embar Street  
49222 Petach-Tikva  
P.O. Box 1 00 49  
49222 Petach-Tikva  
Telephone number +972 3-923-3601  
Fax number +972 3-923-4601  
shay@uriel-shay.com  
www.uriel-shay.com

ATEKA Ltd.  
4, Ha Tavor lane Industrial  
area Segula  
49691 Petach-Tikva  
P.O. Box 4710  
Petach-Tikva  
Telephone number +972 73-200-1311  
Fax number +972 3-924 4245  
marketing@ateka.co.il  
www.ateka.co.il

## IN India

Representative Office  
Weidmüller Electronics India  
Pvt. Ltd.  
12th Lane North Avenue, Opp  
Joggers Park,  
Kalyani Nagar, Pune  
411 006  
Telephone number +91 20-41290090  
wmi@weidmueller.in  
www.weidmueller.com

## IS Iceland

Samey Automation Center  
Lýngas 13  
210 Garoabær  
Telephone number +354 510 5200  
Fax number +354 5 10 5201  
Samey@samey.is  
www.samey.is

## IT Italy

Weidmüller S. r.l.  
Via Albert Einstein 4  
20092 Cinisello  
Balsamo Milano  
Telephone number +39 02 660681  
Fax number +39 02 6124945  
weidmuller@weidmuller.it  
www.weidmuller.it

## JM Jamaica

Please contact  
W Interconnections Inc.  
United States

## JO Jordan

Trans Jordan for Electro  
PO Box 33 06 07  
Amman  
Telephone number +962 6 533 2020  
Fax number +962 6 533 5800  
transjordan@batelco.jo



You can find all Weidmüller addresses and your local contact on the internet at: [www.weidmueller.com/countries](http://www.weidmueller.com/countries)

Let's connect.

Sales company

Representation abroad

without representation abroad

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>JP</b><br><b>Japan</b><br>Nihon Weidmüller Co. Ltd.<br>Sphere Tower Tennoz 2-2-8<br>Higashi-Shinagawa,<br>Shinagawa-ku<br>Tokyo<br>140-0002<br>Telephone number +81 3<br>6711 5300<br>Fax number +81 3 6711<br>5333<br><a href="mailto:weidmullerjapan@weidmueller.co.jp">weidmullerjapan@weidmueller.co.jp</a><br><a href="http://www.weidmueller.co.jp">www.weidmueller.co.jp</a>                                                                                                                                                         | <b>MA</b><br><b>Morocco</b><br>Sofimed<br>137, Bd Moulay Ismail Roches<br>Noires<br>20290 Casablanca<br>Telephone number<br>Fax number<br><a href="mailto:contact@sofimedmaroc.com">contact@sofimedmaroc.com</a>                                                                                                         | <b>MY</b><br><b>Malaysia</b><br>Connect Plus Technology<br>Sdn Bhd<br>No. 43, Jalan PJS 11/22,<br>Bandar Sunway<br>46150 Petaling Jaya<br>Selangor Darul Ehsan<br>Telephone number +60 3<br>5633 7363<br>Fax number +60 3 5633<br>6562<br><a href="mailto:paul@cpctech.com.my">paul@cpctech.com.my</a><br><a href="http://www.cpctech.com.my">www.cpctech.com.my</a>                                                                                                                                                                                                     | <b>PH</b><br><b>Philippines</b><br>Enclosure Systems Specialists<br>Inc.<br>2276 Don Chino Roces<br>Avenue Extension<br>Room 103/105 Narra Building<br>1231 Makati City<br>Telephone number +63 2<br>813 8580<br>Fax number +63 2 813 8596<br><a href="mailto:sales_encsys@pltdtdsl.net">sales_encsys@pltdtdsl.net</a><br><a href="http://www.enclosuresystemsph.com">www.enclosuresystemsph.com</a>                                                                                                                                                                                  | <b>RS</b><br><b>Serbia</b><br>Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>Ustanicka 189, III sprat<br>lokal 7a<br>11050 Beograd<br>Telephone number +381<br>112885274<br>Fax number +381<br>112885274<br><a href="mailto:zoran.rabrenovic@weidmueller.com">zoran.rabrenovic@weidmueller.com</a><br><br>TeLa Elektrik d.o.o.<br>Ul. Dr. Džurica Ljčić 6<br>Beograd<br>Telephone number +381 11<br>2772 415<br>Fax number +381 11 2772<br>850<br><a href="mailto:office@tela.rs">office@tela.rs</a><br><a href="http://www.tela.rs">www.tela.rs</a>                                |
| <b>KE</b><br><b>Kenya</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>South Africa.                                                                                                                                                                                                                                                                                                                                                                                                             | <b>MD</b><br><b>Moldova</b><br>BERHORD A & D srl<br>79/1, str. Milescu Spartaru<br>MD-2075 Chisinau<br>Moldova<br>Telephone number +373 (22)<br>815002<br>Fax number +373 (22)<br>815007<br><a href="mailto:atuleanu@berhord.com">atuleanu@berhord.com</a><br><a href="http://www.ad.berhord.com">www.ad.berhord.com</a> | <b>MZ</b><br><b>Mozambique</b><br>Please contact<br>Phambili Interface<br>South Africa                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>PK</b><br><b>Pakistan</b><br>Automation Controls (Pak)<br>Apartment No. 33 C III,<br>Chenab Block, Allama Iqbal<br>Town<br>Lahore<br>Telephone number +92 42<br>37809948<br>Fax number +92 42<br>37809950<br><a href="mailto:nadeem@acpak.com.pk">nadeem@acpak.com.pk</a><br><a href="http://www.acpak.com.pk">www.acpak.com.pk</a>                                                                                                                                                                                                                                                | <b>RU</b><br><b>Russia</b><br>Weidmüller Group<br>7/10 Khlebozavodskiy<br>Passage,<br>Moskau<br>115230<br>Telephone number +7 495<br>280 72 71<br>Fax number +7 495 280<br>72 71<br><a href="mailto:Info@weidmueller.ru">Info@weidmueller.ru</a><br><a href="http://www.weidmueller.ru">www.weidmueller.ru</a>                                                                                                                                                                                                                                                                                         |
| <b>KG</b><br><b>Kyrgyzstan</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface<br>Azerbaijan.                                                                                                                                                                                                                                                                                                                                                                                                                           | <b>ME</b><br><b>Montenegro</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>Serbia.                                                                                                                                                                                        | <b>NA</b><br><b>Namibia</b><br>Please contact<br>Phambili Interface<br>South Africa                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <b>PL</b><br><b>Poland</b><br>Weidmüller Sp. z o. o.<br>ul. Ogrodowa 58<br>00-876 Warszawa<br>Telephone number +48 22<br>510 09 40<br>Fax number +48 22 510<br>09 41<br><a href="mailto:biuro@weidmueller.com.pl">biuro@weidmueller.com.pl</a><br><a href="http://www.weidmueller.pl">www.weidmueller.pl</a>                                                                                                                                                                                                                                                                          | <b>SA</b><br><b>Saudi Arabia</b><br>Al Abdulkarim Holding Co.<br>P.O. Box 4<br>Dammam 31411<br>Telephone number +966 3<br>8337110<br>Fax number +966 3<br>8829547<br>E-mail <a href="mailto:salehsak@akh.com.sa">salehsak@akh.com.sa</a><br><a href="http://www.weidmueller.ae">www.weidmueller.ae</a><br><br>Saudi Electric Supply<br>Company (SESCO)<br>P.O. Box 32 98<br>Al Khobar 31952<br>Telephone number +966 3<br>8829546 Ext. 3030<br>Fax number<br>E-mail <a href="mailto:Safdar.Malik@sescogex.com">Safdar.Malik@sescogex.com</a><br><a href="http://www.sescogex.com">www.sescogex.com</a> |
| <b>KR</b><br><b>Korea</b><br>Weidmüller Korea Co. Ltd.<br>9th floor<br>429, Teheran-ro, Gangnam-Gu<br>Seoul 135-721<br>Telephone number +82<br>2-516-0003<br>Fax number +82 2-516-0090<br><a href="mailto:info@weidmueller.co.kr">info@weidmueller.co.kr</a><br><a href="http://www.weidmueller.co.kr">www.weidmueller.co.kr</a>                                                                                                                                                                                                               | <b>MG</b><br><b>Madagascar</b><br>Please contact<br>Phambili Interface<br>South Africa                                                                                                                                                                                                                                   | <b>NL</b><br><b>Netherlands</b><br>Weidmüller Benelux B. V.<br>Franciscusweg 221<br>1216 SE Hilversum<br>P.O. Box 1505<br>1200 BM Hilversum<br>Telephone number +31 35<br>626 12 61<br>Fax number +31 35 623<br>20 44<br><a href="mailto:info@weidmueller.nl">info@weidmueller.nl</a><br><a href="http://www.weidmueller.nl">www.weidmueller.nl</a>                                                                                                                                                                                                                      | <b>PR</b><br><b>Puerto Rico</b><br>Please contact<br>W Interconnections Inc.<br>United States                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>SE</b><br><b>Sweden</b><br>Weidmüller AB<br>Axe Danielssons väg 271<br>BOX 31025<br>SE-200 49 Malmö<br>Telephone number +46 77-<br>143 00 44<br>Fax number +46 40-37 48 60<br><a href="mailto:info@weidmueller.se">info@weidmueller.se</a><br><a href="http://www.weidmueller.se">www.weidmueller.se</a>                                                                                                                                                                                                                                                                                            |
| <b>KW</b><br><b>Kuwait</b><br>Kana Controls General Trading<br>& Contracting Co. W. L. L.<br>Al Rai Industrial Area, Plot<br>28-30, St. 31<br>13016 Safat<br>B.P. 25593<br>Telephone number +965<br>4741373<br>Fax number +965 4741537<br><a href="mailto:info@kanacontrols.com">info@kanacontrols.com</a>                                                                                                                                                                                                                                     | <b>MK</b><br><b>Macedonia</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>Serbia<br><br>or<br>ELEKTRO - SMK dooel<br>UL. III Makedonska brigada<br>b.b.<br>1000 Skopje<br>Telephone number +389<br>22460295<br>Fax number<br>Elektro-smk@telekabel.net.mk                 | <b>NO</b><br><b>Norway</b><br>Sivilingeniør J.F. Knudtzen AS<br>Billingstadsletta 97<br>1396 Billingstad<br>PO Box 160<br>1378 Nesbru<br>Telephone number +47 66<br>98 33 50<br>Fax number +47 66 98 09 55<br><a href="mailto:firmapost@jfkknudtzen.no">firmapost@jfkknudtzen.no</a><br><a href="http://www.jfkknudtzen.no">www.jfkknudtzen.no</a>                                                                                                                                                                                                                       | <b>PT</b><br><b>Portugal</b><br>Weidmüller Sistemas de<br>Interface S. A.<br>Estrada Outeiro Polima, R.<br>Augusto Dias da Silva, Lote<br>B - Esc. 2<br>São Domingos de Rana<br>2785-515 Abóboda<br>Telephone number +351 214<br>459 191<br>Fax number +351 214<br>455 871<br><a href="mailto:weidmuller@weidmueller.pt">weidmuller@weidmueller.pt</a><br><a href="http://www.weidmueller.pt">www.weidmueller.pt</a>                                                                                                                                                                  | <b>SG</b><br><b>Singapore</b><br>Weidmüller Pte. Ltd.<br>70 Bendemeer Road<br># 04-03 Luzerne Building<br>Singapore 339940<br>Telephone number +65 6841<br>5311<br>Fax number +65 6841 5377<br><a href="mailto:info@weidmueller.com.sg">info@weidmueller.com.sg</a><br><a href="http://www.weidmueller.com.sg">www.weidmueller.com.sg</a>                                                                                                                                                                                                                                                              |
| <b>KZ</b><br><b>Kazakhstan</b><br>Please contact<br>Weidmüller Group<br>Russia                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>MN</b><br><b>Mongolia</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface<br>Azerbaijan.                                                                                                                                                                                                       | <b>NZ</b><br><b>New Zealand</b><br>Cuthbert S. Stewart Ltd.<br>27 Te Puni Street<br>Petone<br>PO Box 38496<br>Wellington Mail Centre 5054<br>Telephone number (04) 568<br>6156<br>Fax number (09) 489 1752<br><a href="mailto:cs@cutthbertstewart.co.nz">cs@cutthbertstewart.co.nz</a>                                                                                                                                                                                                                                                                                   | <b>PY</b><br><b>Paraguay</b><br>Please contact<br>CPI SA<br>Argentina                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <b>SI</b><br><b>Slovenia</b><br>Elektrospoj d. o. o.<br>Stegne 27<br>SI- 1000 Ljubljana<br>Osrednjeslovenska<br>Telephone number +386 1<br>511 3810<br>Fax number +386 1 511<br>1604<br><a href="mailto:info@elektrospoj.si">info@elektrospoj.si</a><br><a href="http://www.elektrospoj.si">www.elektrospoj.si</a>                                                                                                                                                                                                                                                                                     |
| <b>LB</b><br><b>Lebanon</b><br>Progress Engineering &<br>Trading Enterprises<br>Al Nahr Street<br>Beirut 11-1111<br>Telephone number +961 1<br>444 664<br>Fax number +961 1 561 880<br><a href="mailto:progress@inco.com.lb">progress@inco.com.lb</a>                                                                                                                                                                                                                                                                                          | <b>MT</b><br><b>Malta</b><br>E. S. S., Electrical Supplies &<br>Services Ltd.<br>San Gwakklin Road<br>Mriehel<br><br>Telephone number +356<br>21255777<br>Fax number +356 21255999<br><a href="mailto:robert.agius@ess.com.mt">robert.agius@ess.com.mt</a>                                                               | <b>OM</b><br><b>Oman</b><br>DAN INTERNATIONAL LLC.<br>Ghala St. 111<br>BP 2901<br>Seeb<br>Telephone number +968<br>5036 77<br>Fax number +968 5037 55<br><a href="mailto:yedu@danintl.com">yedu@danintl.com</a>                                                                                                                                                                                                                                                                                                                                                          | <b>QA</b><br><b>Qatar</b><br>Doha Motors<br>PO Box 145<br><br>Telephone number +974<br>4651441<br>Fax number +974 4654579<br><a href="mailto:dmtctech@qatar.net.qa">dmtctech@qatar.net.qa</a><br><a href="http://www.dohamotorsgroup.com/td.html">http://www.dohamotorsgroup.com/td.html</a><br><br>Petroleum Technology Co.<br>W.L.L.<br>PO Box 16069<br>5th Floor Toyota tower<br>Telephone number +974<br>44419603<br>Fax number +974 44419604<br><a href="mailto:petrotec@qatar.net.qa">petrotec@qatar.net.qa</a><br><a href="http://www.petrotec.com.qa">www.petrotec.com.qa</a> | <b>SK</b><br><b>Slovakia</b><br>ELEKTRIS s.r.o.<br>Elektrárnská 1<br>831 04 Bratislava<br>Telephone number +421<br>2/4920 0113<br>Fax number +421 2/4920<br>0119<br><a href="mailto:bratislava@elektris.sk">bratislava@elektris.sk</a>                                                                                                                                                                                                                                                                                                                                                                 |
| <b>LT</b><br><b>Lithuania</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>Latvia<br><br>or<br>ELEKTROS IRANGA<br>Tinklų g. 29 a<br>LT-5319 Panevėžys<br>Telephone number +370 (45)<br>582 828<br>Fax number<br><a href="mailto:info@eliranga.lt">info@eliranga.lt</a>                                                                                                                                                                                                                           | <b>MU</b><br><b>Mauritius</b><br>Mubelo Electrical Ltd.<br>Office 26, Gateway building,<br>St Jean Road<br>Quatre Bornes<br>Mauritius<br>Telephone number +230<br>4670989<br>Fax number +230 4654051<br><a href="mailto:richard.mubelo@orange.mu">richard.mubelo@orange.mu</a>                                           | <b>PE</b><br><b>Peru</b><br>IMPEXINCA S.A.C.<br>Calle Ortiz de Zevallos No.<br>105, Urb. San Antonio<br>18<br>Lima, Miraflores<br>Telephone number +51 1<br>447 5608<br><a href="mailto:info@impexinca.pe">info@impexinca.pe</a><br><a href="http://www.impexinca.pe">www.impexinca.pe</a><br><br>J & W CIA. S. A.<br>Calle 6 Mz. D Lte. 23, Urb.<br>Ind. Grimanesa<br>01<br>Callao<br>Telephone number +51 1<br>572 2539<br>Fax number +51 1 572 0152<br><a href="mailto:contacto@jwcia.com">contacto@jwcia.com</a><br><a href="http://www.jwcia.com">www.jwcia.com</a> | <b>RO</b><br><b>Romania</b><br>Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>Ionescu Crum Street, No.<br>1, 1st Tower, 1st Floor,<br>Office 4<br>500446 Brasov - Brasov<br>Business Park<br>Telephone number +40 (268)<br>446 222<br>Fax number +40 (262)<br>205 410<br><a href="mailto:claudiu.totea@weidmueller.com">claudiu.totea@weidmueller.com</a><br><a href="http://www.weidmueller.com">www.weidmueller.com</a>                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LU</b><br><b>Luxembourg</b><br>Please contact<br>Weidmüller Benelux B. V.<br>Netherlands                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>MW</b><br><b>Malawi</b><br>Please contact<br>our Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>South Africa.                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>LV</b><br><b>Latvia</b><br>SIA Abi4<br>Daugavgrivas 31b<br>Rīga, LV-1007<br>Telephone number +371 674<br>70999<br>Fax number +371 676<br>24562<br><a href="mailto:abi_4@tvnet.lv">abi_4@tvnet.lv</a><br><br>Representative Office<br>Weidmüller Interface GmbH<br>& Co. KG<br>Udens str. 12-118<br>Rīga, LV-1007<br>Telephone number +371<br>29254766<br>Fax number +371 674<br>65637<br><a href="mailto:ilgonis.rudaks@weidmueller.com">ilgonis.rudaks@weidmueller.com</a><br><a href="http://www.weidmueller.com">www.weidmueller.com</a> | <b>MX</b><br><b>Mexico</b><br>W Interconnections S. A.<br>DE C. V.<br>Blvd. Hermanos Serdán 698,<br>Col. San Rafael Oriente<br>72029 Puebla<br>Telephone number +52 (222)<br>268 6227<br>Fax number +52 (222) 286<br>6242<br><a href="mailto:clientes@weidmueller.com.mx">clientes@weidmueller.com.mx</a>                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

# Addresses worldwide

Let's connect.

**SV El Salvador**  
Prestegard Electro  
11 Avenida Norte No. 240  
Edificio Salazar No. 2  
San Salvador  
Telephone number +503  
2271 1690  
Fax number +503 2221  
3851  
prestegard@navegante.com.sv

**SY Syria**  
Please contact  
Weidmüller Middle East FZE  
United Arab Emirates

**SZ Swaziland**  
Please contact  
Phambili Interface  
South Africa

**TH Thailand**  
Pisanu Engineering Co. Ltd.  
Kwang Dingaeng, Khet  
Dingaeng  
800/2 Soi Trakulsuk, Asoke-  
dindaeng Road  
Dindaeng, Bangkok  
10400  
Telephone number +66 2  
248 2896  
Fax number +662 105 6301  
ecsales@pisanu.co.th  
www.pisanu.co.th

Representative Office  
Weidmüller Pte. Ltd.  
37/F, Sathorn Square Building  
98 North Sathorn Road  
Bangkok, Silom Bangrak  
10500  
Telephone number +66 2  
105 6300  
Fax number +66 2 642 9220  
info@weidmuller.com.sg

**TJ Tajikistan**  
Please contact  
our Representative Office  
Weidmüller Interface  
Azerbaijan.

**TM Turkmenistan**  
Please contact  
our Representative Office  
Weidmüller Interface  
Azerbaijan.

**TN Tunisia**  
Please contact  
Weidmüller E. U. R. L.  
France

**TR Turkey**  
Weidmüller Elektronik Ticaret  
Ltd. Sirketi  
Kavacik Mah. Orhan Veli Kanik  
Caddesi 9/1  
34810 Beykoz / Istanbul  
Telephone number +90 (216)  
537 10 70  
Fax number +90 (216) 537  
10 77  
info@weidmuller.com.tr  
www.weidmuller.com.tr

**TW Taiwan**  
Weidmüller (Hong Kong)  
Limited  
No. 3, Lane 89, ChungYang  
N. Rd  
24148 SanChuang City,  
Taipei  
Telephone number +886 921  
949 751  
roy.lin@weidmueller.com.hk

**TZ Tanzania**  
Please contact  
our Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
South Africa.

**UA Ukraine**  
LLC WM UKRAINE  
Levanevskogo str. 6  
Kiev  
3058  
Telephone number +38 044  
490 32 48  
Fax number  
info@wm-ua.com.ua  
wm-ua.com.ua/

Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
Z, office 303  
7-D, Zdolbunivska str.  
Kiev, 2081  
Telephone number  
(mobile) +38 050 440 25 24  
info.ua@weidmueller.com

**US United States**  
W Interconnections Inc.  
821 Southlake Boulevard  
Richmond Virginia 23236  
Telephone number +1 (804)  
794-2877  
Fax number +1 (804) 379-  
2593  
info@weidmuller.com  
www.weidmuller.com

**UY Uruguay**  
REWO Uruguay S. A.  
AV. Bolivia 2001Esq  
Rocafuerte  
11300 Carrasco Montevideo  
Telephone number +598  
2604 8439  
Fax number +598 2604  
8439  
rewo@rewoouruguay.com.uy

**UZ Republic of Uzbekistan**  
Please contact  
our Representative Office  
Weidmüller Interface  
Azerbaijan.

**VE Venezuela**  
Somerinca C. A.  
Corazon de Jesus - 3ra  
Transversal con calle el  
Carmen- Los Dos Caminos  
Caracas 1070-A  
Telephone number +58  
2 122352748  
Fax number +58  
2122399341  
klocmoeller@cantv.net  
www.somerinca.com

**VN Vietnam**  
AUMI Industrial Equipment &  
Automation Company Limited  
E1, La Thanh Hotel  
218 Doi Can Street  
Lieu Giai Ward, Ba Dinh  
District  
Hanoi City  
Telephone number +84 4  
37628601  
Fax number +84 4  
62661391  
aumi@aumi.com.vn  
www.aumi.com.vn

Representative Office  
Weidmüller Pte. Ltd.  
Level 16 Saigon Tower  
Building  
29 Le Duan Street  
District 1  
Ho Chi Minh  
Telephone number +848  
3520 7717  
Fax number +848 3520  
7604  
info@weidmuller.com.sg

**ZA South Africa**  
Phambili Interface  
PO Box 193  
1609 Johannesburg, Edenvale  
5 Bundo Road, Sebenza  
1610 Johannesburg  
Telephone number +27 (11)  
4521930  
Fax number  
info@weidmuller.co.za  
www.weidmuller.co.za

Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
210 Amarand  
Avenue, Pegasus Building  
181 Pretoria, waterkloof Glen  
ext 2 -  
Telephone number +27 12  
003 2906  
Fax number +27 (11)  
4526455  
Jacques.Vosloo@weidmueller.  
com  
www.weidmueller.com

**ZM Zambia**  
Please contact  
Phambili Interface  
South Africa

**ZW Zimbabwe**  
Please contact  
Phambili Interface  
South Africa