



Double-deck  
compression clamp  
heavy duty switch  
terminal blocks

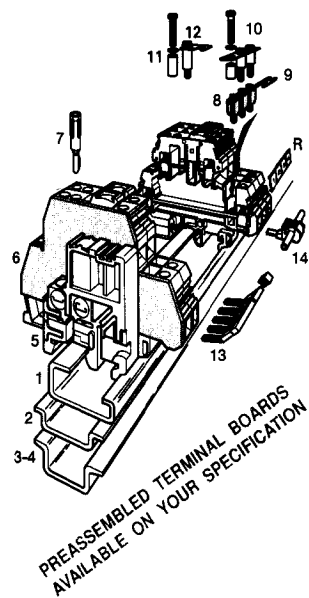

M 4/6.D2.SNBT

Spacing 6 mm + 0,05



6 mm block - equipped with 4 test sockets  
DIA 2 mm / .079" - Switch on top circuit  
standard connection on bottom

| Type          | P/N        |
|---------------|------------|
| Grey body     |            |
| M 4/6.D2.SNBT | 115 561.15 |

| Type | P/N | Type | P/N |
|------|-----|------|-----|
|------|-----|------|-----|

Characteristics

| Wire size<br>(see generalities) | Solid wire    | 0-4 mm <sup>2</sup> | 22-12 AWG         | 22-12 AWG | 0-4 mm <sup>2</sup> |                   |  |  |  |  |  |  |  |
|---------------------------------|---------------|---------------------|-------------------|-----------|---------------------|-------------------|--|--|--|--|--|--|--|
|                                 | Stranded wire | 0-4 mm <sup>2</sup> |                   |           | 0-4 mm <sup>2</sup> |                   |  |  |  |  |  |  |  |
| Rated voltage                   | V             | ~ AC                | 380 Gr.C          |           | 400 Cat.C           |                   |  |  |  |  |  |  |  |
|                                 |               | = DC                | 450 Gr.C          | 300       | 250 Cat.C           |                   |  |  |  |  |  |  |  |
| Rated current                   | A             |                     | 10                | 15        | 15                  | 10                |  |  |  |  |  |  |  |
| Rated wire size                 |               |                     | 4 mm <sup>2</sup> | 12 AWG    | 12 AWG              | 4 mm <sup>2</sup> |  |  |  |  |  |  |  |

Other characteristics

| For compression clamp connection | Wire stripping length | Recommended screwdriver | Recommended torque      | Protection | Wire stripping length | Recommended screwdriver | Recommended torque | Protection | Wire stripping length | Recommended screwdriver | Recommended torque | Protection |
|----------------------------------|-----------------------|-------------------------|-------------------------|------------|-----------------------|-------------------------|--------------------|------------|-----------------------|-------------------------|--------------------|------------|
|                                  | 9,5 mm .37"           | 4 mm                    | 0,5-0,8 Nm 3,5-5,3lb.in | IP20       |                       |                         |                    |            |                       |                         |                    |            |

Approvals (Contact Entelec)

| Type | P/N | Type | P/N | Type | P/N |
|------|-----|------|-----|------|-----|
|------|-----|------|-----|------|-----|

Accessories

- 1 Rail 32 x 15 DIN1  
2 Rail 35 x 7,5 x 1 DIN3  
3 Rail 35 x 15 x 2,3 DIN3  
4 Rail 35 x 15 x 1,5  
5 High end stop (all rails)  
6 End section  
7 Test plug  
8 Assembled jumper bar  
  
9 Connector plate  
10 Jumper bar not preassembled  
11 Screw + washer + post  
12 Pivoting jumper bar  
13 Comb type jumper bar  
14 IDC jumper

| Type              | P/N           |
|-------------------|---------------|
| PR1 Z2            | 163 050.04    |
| PR30 prepunched   | 173 220.05    |
| PR4               | 168 500.12    |
| PR5 prepunched    | 101 588.26    |
| BAMH th. 9.1 mm   | 114 836.00    |
| FEMS6D            | 116 591.05    |
| FC                | (see access.) |
| BJM61 (1) 2 poles | 173 515.11    |
| 3 poles           | 173 516.12    |
| 4 poles           | 173 517.13    |
| 5 poles           | 173 519.25    |
| 10 poles          | 173 520.22    |
| EL6 (1)           | 173 627.21    |
| BJS1 (1) 10 poles | 168 485.27    |
| EV6D (1)          | 168 400.16    |
| BJP61             | 167 225.20    |
| PC61 10 poles     | 163 311.22    |
| AD2.5             | 114 205.20    |

| Type | P/N | Type | P/N |
|------|-----|------|-----|
|------|-----|------|-----|

R See markers and  
other accessories

Marking Method

(1) Use of these accessories requires the user to cut out the partition