METAL STOPWATCH INSTRUCTIONS

You have just purchased the ULTIMATE stopwatch. Your timer includes a GIANT, easy to read display, combined with three separate countdown timers (countdown/repeat, countdown/ continue, countdown/stop), a stopwatch and time of day chronograph.

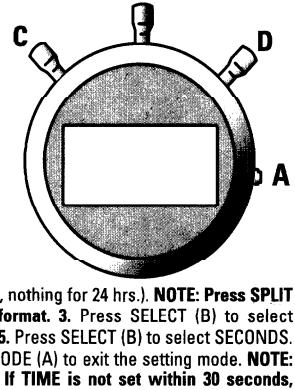

A - Mode Button (MODE)
B - Function Select Button (SELECT)
C - Split/Reset Button (SPLIT/RESET)
D - Start / Stop Button (START/STOP)

The starting point for operating your Stopwatch is *NORMAL TIME*. If *NORMAL TIME* is not displayed, press MODE button (A) until it appears ("TM" will appear above the display).

TO SET TIME OF DAY CLOCK

1. Press MODE (A) for 2 seconds. Hour digits will flash. ("SET" and "TM" will appear above the display) **2.** Press START / STOP (D) to set HOURS (A OR P= 12 hrs, nothing for 24 hrs.). **NOTE: Press SPLIT / RESET (C) to switch between 12 or 24 hour time format. 3.** Press SELECT (B) to select MINUTES. **4.** Press START / STOP (D) to set MINUTES. **5.** Press SELECT (B) to select SECONDS. 6. Press START / STOP (D) to set SECONDS. 7. Press MODE (A) to exit the setting mode. **NOTE: To "fast advance" digits, press and HOLD (D) Button. If TIME is not set within 30 seconds, display will return to NORMAL TIME.**

ALARM MODE

To see the Alarm Time, starting from NORMAL TIME, press SPLIT / RESET (C) until you see "AL" above the display. **1.** Press START / STOP (D) to activate alarm. (((0))) will show. **2.** Press START / STOP (D) to de-activate alarm. Nothing will show.

TO SET ALARM TIME

Starting from NORMAL TIME, press SPLIT / RESET (C) until you see "AL" above the display. **1.** Press MODE (A) for 2 seconds. Hour digits will flash. ("SET" and "AL" will appear above the display). **2.** Press START / STOP (D) to set HOURS. **3.** Press SELECT (B) to select MINUTES. **4.** Press START / STOP (D) to set MINUTES. **5.** Press MODE (A) to exit the setting mode **NOTE: To 'fast advance" digits. press and HOLD (D) Button. If ALARM is not set within 30 seconds, display will return to NORMAL TIME.**

STOPWATCH MODE

From NORMAL TIME, press MODE button (A) until you see "SW" above the display. ("LAP" or "CUM" will flash.) **1.** Press SELECT (B) to choose either CUM (cumulative split), or LAP (Lap split) timing mode. **2.** Press START / STOP (D) to start timing. **3.** Press SPLIT / RESET (C) to take "split". ("SPT" will flash.) **4.** Press SPLIT / RESET (C) to "release" display to show running time. (press (C) repeatedly for more split times) **5.** Press START / STOP (D) to stop timing. ("SP" will show above the display.) **6.** Press SPLIT / RESET (C) to reset stopwatch to "00".

1- 2 FAST FINISH TIMING: **1.** Press START / STOP (D) to start timing. **2.** Press SPLIT / RESET (C) to take "split #1" **3.** Press START / STOP (D) to take "split #2" (See and record "split #1 at this time) **4.** Press SPLIT / RESET (C) to release display to show "split #2". (See and record "split #2 at this time) **5.** Press SPLIT / RESET (C) to reset stopwatch to "00".

COUNT-UP TIMER

From NORMAL TIME, press the MODE button (A) until you see "SW" above the display. ("LAP" or "CUM" will flash. Disregard them.) **1.** If numbers (other than 00:00) appear on display and they are "moving", the stopwatch is counting up. **2.** Press START/STOP (D). Timer will stop. **3.** Press SPLIT / RESET (C) to RESET clock to 00:00. **4.** If numbers (other than 00:00) appear on display and they are "not moving", the stopwatch is stopped.. **5.** Press SPLIT / RESET (C) to RESET clock to 00:00. *TO COUNT -UP:* **1.** Press START / STOP (D) to start timing. **2.** Press START / STOP (D) to stop timing. **3.** Press SPLIT / RESET (C) to reset stopwatch to "00".

COUNT-DOWN TIMER

From NORMAL TIME, press MODE button (A) until you see "CD" above and to the right of the display. Press SELECT (B) to choose countdown method you prefer: (This shows in the upper left above the display): "CR" Countdown and repeat counting down from the preset time when timer reaches 00 "CC" Countdown and countup when timer reaches 00. "CS" Countdown and Stop at 0:00:00 After you select the Countdown Mode (CR,CC, or CS), press MODE button (A) for 2 seconds to begin SETTING your Countdown time.. Hour digits will flash. ("SET" will appear above the display). **1.** Press START / STOP (D) to set HOURS. **2.** Press SELECT (B) to select MINUTES. **3.** Press START / STOP (D) to set MINUTES. **4.** Press SELECT (B) to select SECONDS. **5.** Press START / STOP (D) to set SECONDS. **6.** Press MODE (A) to exit the setting mode and begin countdown timing. **NOTE: To 'fast advance" digits, press and HOLD (D) Button. If TIME is not set within 30 seconds, display will return to NORMAL TIME.**

TO BEGIN COUNTDOWN TIMING: **1.** Press START / STOP (D) to start timing. **2.** Press START / STOP (D) to stop timing. **3.** Press SPLIT / RESET (C) to reset countdown timer to preset time.

IMPORTANT

• If there is a Countdown Time "SET" on the timer, you will always reset to that time until you change the countdown time. • If there is no time (00:00) set on the timer, and you start the countdown, it will begin from 24 hours. • If you want to reset the hours, minutes or seconds digits to 00, put the time in the SET Mode and press "C" button when the digits flash.

"TIME'S UP"ALARM When the Count-Down Timer reaches 00:00, it will sound an Alarm for one minute, alerting you that the timing has been completed.

SPECIFICATIONS

Accuracy at a normal temperature: + or - 15 sec/mo.

Display Capacity - Count Down
HOURS/ MINUTES: 23 hrs, 59 min
SECONDS: 59 sec

Display Capacity - Count Up
HOURS/MINUTES/SECONDS: 23 hrs., 59 min, 59 sec.

Battery For best results use silver oxide or alkaline battery.