


24 HOUR PLUG-IN TIME CONTROLLER

Cat. No TS800B



OPERATING INSTRUCTIONS

TS800B 24 Hour Plug-In Time Controller

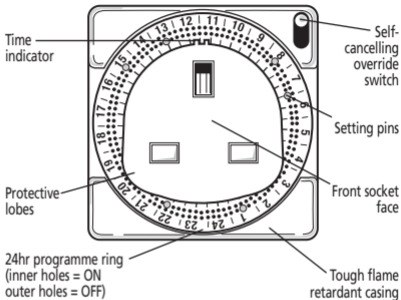


- 1 To programme the controller:-
 - a Decide what times you would like the Timecontroller to switch on and off.
 - b Insert the setting pins into the programme ring according to your requirements. **To switch ON insert the pins into the inner circle of holes. To switch OFF insert the pins into the outer circle of holes.**

Important

The pins should be pushed fully home or they will catch on the underside of the protective lobes on the bottom of the front socket face (see diagram).

- 2 Check your programme by manually turning the programme ring clockwise once through the 24 hour cycle.
Note: When the pins pass over the time indicator it will require a firm hand.

- 
- 3
- 3 Turn the programme ring clockwise until the correct time of day is directly above the time indicator at the top of the front socket face (see diagram).
 - 4 Plug the Timecontroller into a socket and switch socket ON if necessary.
 - 5 Plug your appliance into the Timecontroller and switch the appliance ON.
 - 6 You can switch your appliance ON and OFF at any time, by using the small lever at the side of the Timecontroller
0=OFF, 1=ON. This will self cancel when the next ON or OFF programme operates.

Points to note

- a Each time the Timecontroller has carried out an automatic switching operation the manual switch cannot be operated for about 15 minutes before and after automatic switching because it is mechanically locked for this period.
- b If required you can programme your Timecontroller to switch off only by inserting just a single pin. For many electrical appliances you can, therefore, programme for off only to ensure that if you forget to switch the appliance off nothing can be damaged or unnecessary power used. When using this technique switch on by hand using the self cancelling override switch.
- c The Programme ring can be turned even when the Timecontroller is operating. In case of power failure, please re-adjust the Timecontroller to the correct time of day, turning the dial in a clockwise direction.

Important

This Timecontroller is recommended for general domestic appliances up to 13 amp resistive or 5 amp inductive rating. Certain washing machines require the power to be permanently connected and they cannot be controlled by the TS800B. This is also true of tumble dryers with push button start.

Note: Minimum setting interval =
15 minutes.

Minimum ON/OFF time between
settings = 30 minutes.

Specifications

Operating Temp: 0°C to 40°C

Operating Voltage: 230V AC 50Hz

Switch Rating: 230V AC 13 amp resistive
(3kW)

5 amp inductive

400W Filament Lighting

100W Low Energy or any
type of Fluorescent
Lighting

Conforms to

Directives: 73/23/EEC & 89/336/EEC

**Not suitable for discharge lighting
(eg SON or Halide)**

3 Year Guarantee

In the unlikely event of the product becoming faulty due to defective material or manufacture within 3 years of the date of purchase, please return it to your supplier in the first year with proof of purchase and it will be replaced free of charge. During the second and third years or any difficulty in the first year telephone the helpline on **020 8450 0515**

HELPLINE
020-8450-0515

or email helpline@timeguard.com



For a product brochure please contact:

Timeguard Ltd.

Victory Park, 400 Edgware Road,
London NW2 6ND Tel: 020-8452-1112

or email csc@timeguard.com

A **theben** Group company