


Extremely Thin SPST-NO Flat Relay, One of the Thinnest Relays in the World

- Dimensions of 7.0(W) × 10.6(L) × 4.2 mm(H) (SMD) or 3.8 mm(H) (TH) represent a reduction of approximately 20% in mounting area and approximately 67% in volume compared with the OMRON G5V-1, for higher-density mounting.
- Ensures a dielectric strength between coil and contacts (1,000 VAC), and conforms to FCC Part 68 (i.e., withstanding an impulse withstand voltage of 1.5 kV for 10 × 160 μs). High dielectric strength between contacts of same polarity (750 VAC).
- Surface-mounting relays are also available.
- Conforms to UL60950 (File No. E41515) / CSA C22.2 No. 60950 (File No. LR31928).
- Use of lead completely eliminated.

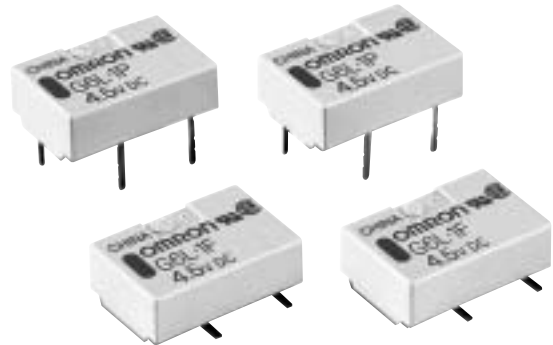

Ordering Information

Standard Surface-mounting Terminal Models (UL- and CSA-certified)

Classification	Construction	Contact form	Rated coil voltage	Model
Single-side stable	Plastic sealed	SPST-NO	3 VDC	G6L-1P
			4.5 VDC	
			5 VDC	
			12 VDC	
			24 VDC	
			3 VDC	G6L-1F
			4.5 VDC	
			5 VDC	
			12 VDC	
			24 VDC	

Note: When ordering tape packing (Surface-mounting Terminal Relays), add "-TR" to the model number. Be sure since "-TR" is not part of the relay model number, it is not marked on the relay case.

Model Number Legend:

G6L□-1□-□
1 2 3 4

1. Relay function

None: Single-side stable relay

2. Number of contact poles/ Contact form

1: SPST-NO

3. Terminal shape

P: PCB terminals

F: Surface-mounting terminals

4. Packing state

None: Stick packing

TR: Tape packing

Application Examples

Peripherals of MODEM/PC, telephones, office automation machines, audio-visual products, communications equipment, measurement devices, amusement equipment, or security equipment.

Specifications

■ Contact Ratings

Item/Load	Resistive load
Contact mechanism	Single crossbar
Rated load	0.3 A at 125 VAC, 1 A at 24 VDC
Rated carry current	1 A
Max. switching voltage	125 VAC, 60 VDC
Max. switching current	1 A

■ Coil Ratings

Single-side Stable Relays (G6L-1P, G6L-1F)

Rated voltage	3 VDC	4.5 VDC	5 VDC	12 VDC	24 VDC
Rated current	60.0 mA	40.0 mA	36.0 mA	15.0 mA	9.6 mA
Coil resistance	50.0 Ω	112.5 Ω	139.0 Ω	800.0 Ω	2,504.0 Ω
Must operate voltage	75% max. of rated voltage				
Must release voltage	10% min. of rated voltage				
Maximum voltage	150% of rated voltage				130% of rated voltage
Power consumption	Approx. 180 mW				Approx. 230 mW

- Note:**
1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.
 2. The operating characteristics are measured at a coil temperature of 23°C.
 3. The maximum voltage is the highest voltage that can be imposed on the relay coil.


■ Characteristics

Item	Classification	Single-side Stable Relays
	Model	G6L-1P, G6L-1F
Contact resistance (See note 1.)		100 mΩ max.
Operating time (See note 2.)		5 ms max. (approx. 1.1 ms)
Release time (See note 2.)		5 ms max. (approx. 0.4 ms)
Insulation resistance (See note 3.)		1,000 MΩ min. (at 500 VDC)
Dielectric strength	Coil and contacts	1,000 VAC, 50/60 Hz for 1 min
	Contacts of same polarity	750 VAC, 50/60 Hz for 1 min
Impulse withstand voltage	Coil and contacts	1,500 VAC, 10 × 160 μs
Vibration resistance	Destruction	10 to 55 Hz, 1.65-mm single amplitude (3.3-mm double amplitude)
	Malfunction	10 to 55 Hz, 1.65-mm single amplitude (3.3-mm double amplitude)
Shock resistance	Destruction	1,000 m/s ²
	Malfunction	100 m/s ²
Life expectancy	Mechanical	5,000,000 operations min. (at 36,000 operations/hour)
	Electrical	100,000 operations min. (with a rated load at 1,800 operations/hour)
Failure rate (P level) (See note 4.)		1 mA at 5 VDC
Ambient temperature		Operating: -40°C to 70°C (with no icing or condensation)
Ambient humidity		Operating: 5% to 85%
Weight		Approx. 0.6 g


- Note:**
1. The contact resistance was measured with 10 mA at 1 VDC with a fall-of-potential method.
 2. Values in parentheses are actual values.
 3. The insulation resistance was measured with a 500-VDC Megger Tester applied to the same parts as those used for checking the dielectric strength.
 4. This value was measured at a switching frequency of 120 operations/min. This value may vary, depending on switching frequency, operating conditions, expected reliability level of the relay, etc. It is always recommended to double-check relay suitability under actual load conditions.
 5. The above values are initial values.

Engineering Data

Maximum Switching Capacity

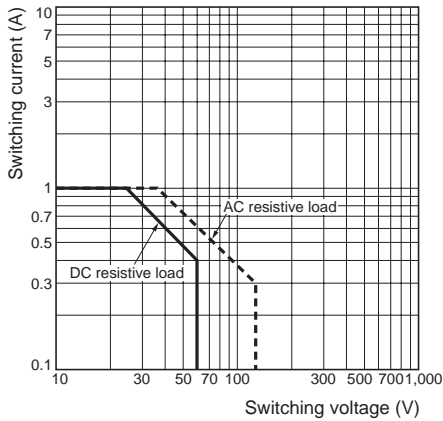


Ambient Temperature vs. Maximum Voltage

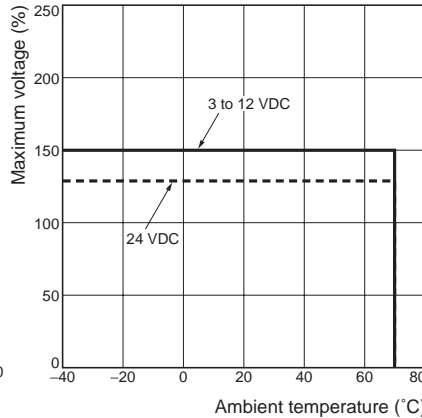


Note: "Maximum voltage" is the maximum voltage that can be applied to the Relay coil.


Ambient Temperature vs. Switching Current

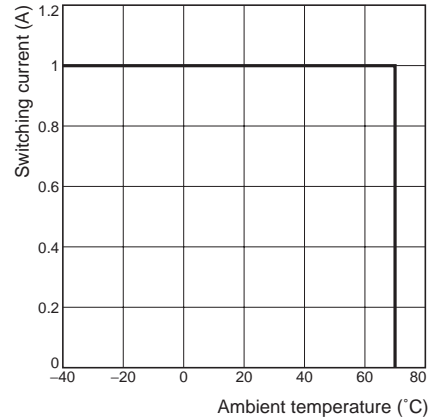


Life Expectancy

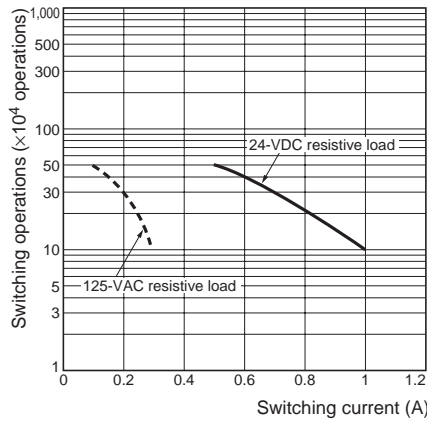


Ambient Temperature vs. Must Operate or Must Release Voltage

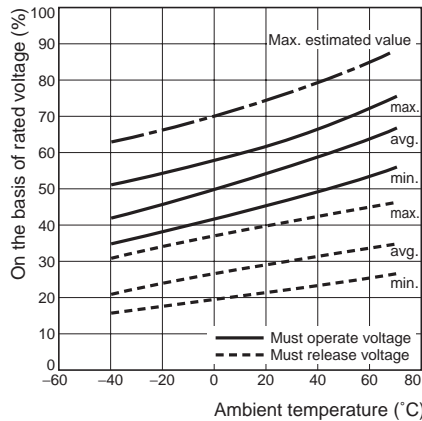


Shock Malfunction

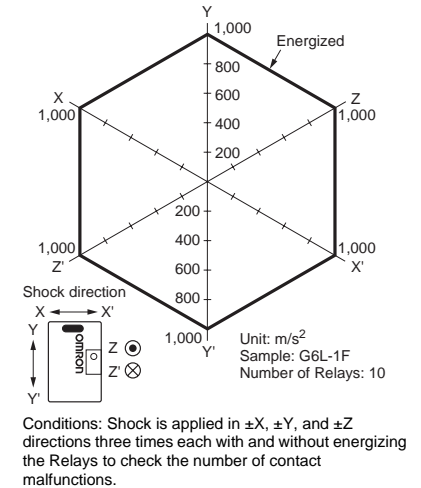


Electrical Life Expectancy (with Must Operate and Must Release Voltage) (See note.)

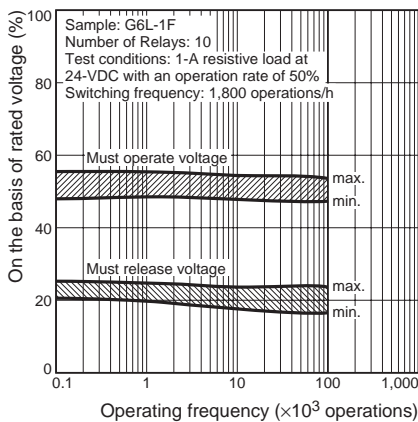

Electrical Life Expectancy (Contact Resistance) (See note.)

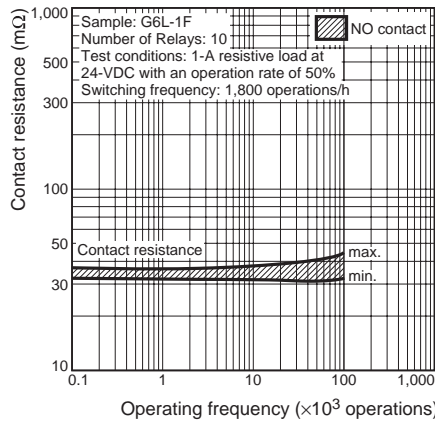


Contact Reliability Test (Contact Resistance) (See note.)

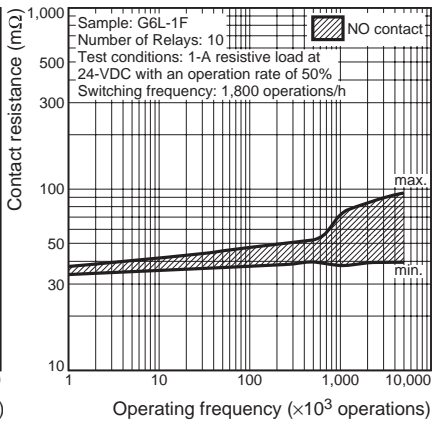


Note: The tests were conducted at an ambient temperature of 23°C.




Mutual Magnetic Interference

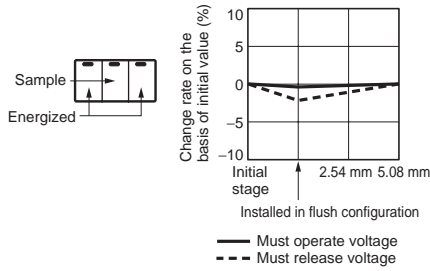


Mutual Magnetic Interference

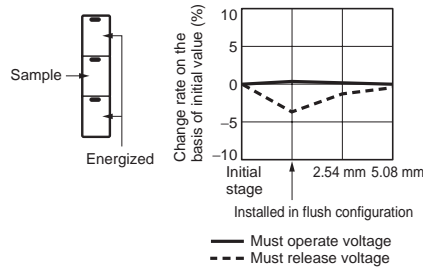


External Magnetic Interference

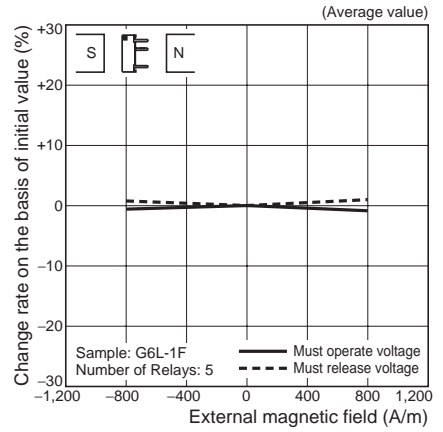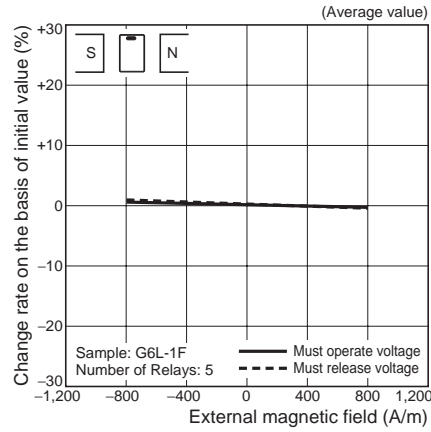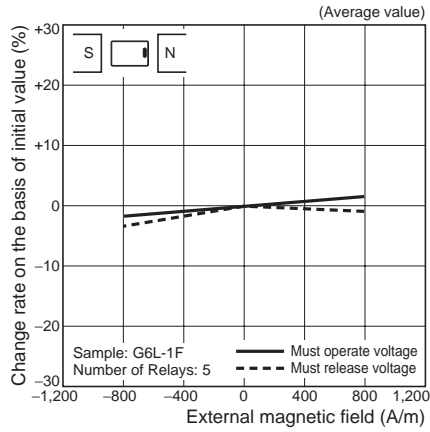


High-frequency Characteristics (Isolation)

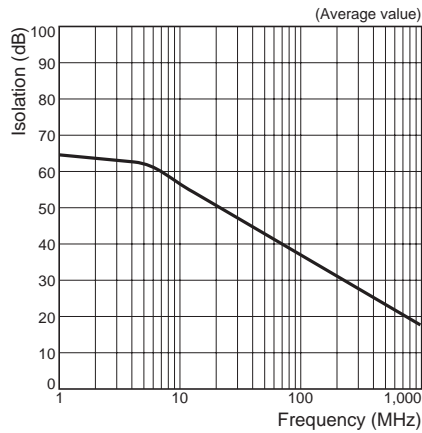


High-frequency Characteristics (Insertion Loss)

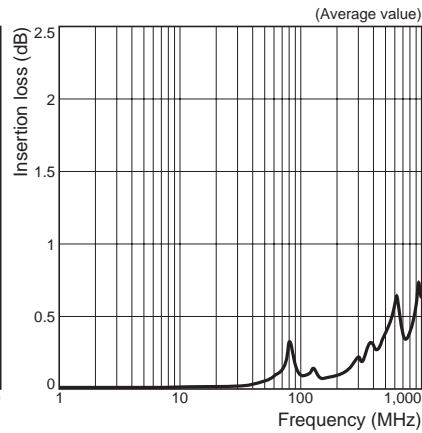


High-frequency Characteristics (Return Loss, V.SWR)

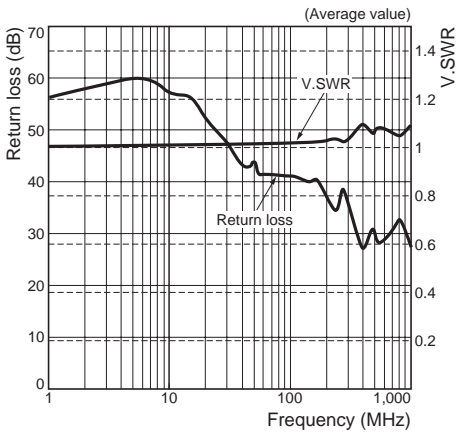


Must Operate and Must Release Time Distribution (See note.)

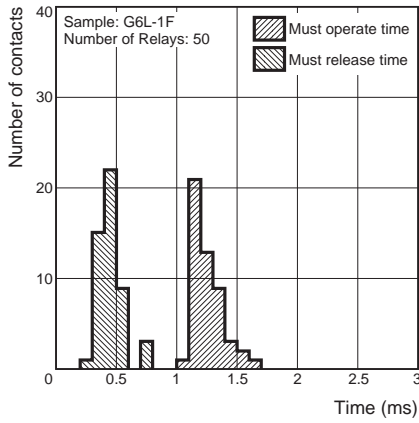

Distribution of Bounce Time (See note.)

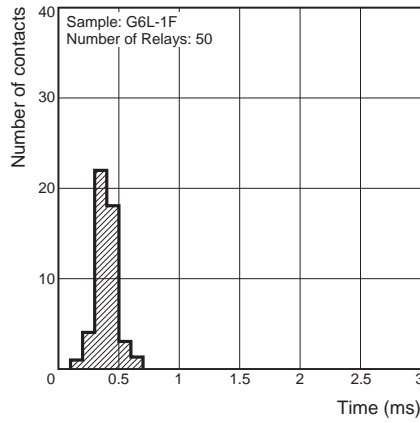

Vibration Resistance


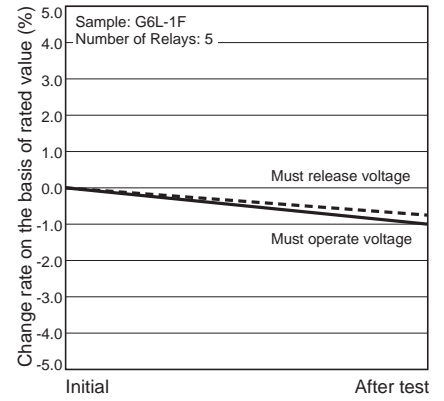


Note: The tests were conducted at an ambient temperature of 23°C.


Dimensions

Note: All units are in millimeters unless otherwise indicated.


G6L-1P

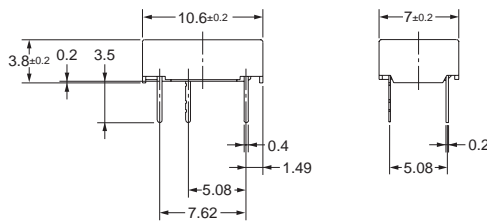

PCB Mounting Holes (Bottom View)
Tolerance: ±0.1 mm





Terminal Arrangement/ Internal Connections (Bottom View)




Note: Each value has a tolerance of ±0.3 mm.


G6L-1F

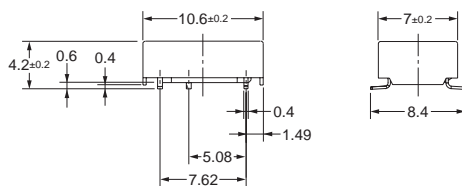

PCB Mounting Holes (Top View)
Tolerance: ±0.1 mm



Terminal Arrangement/ Internal Connections (Top View)




Note: Each value has a tolerance of ±0.3 mm.

Stick Packing and Tape Packing

1. Stick Packing

Relays in stick packing are arranged so that the orientation mark of each Relay is on the left side.

Always confirm that the Relays are in the correct orientation when mounting the Relays to the PCBs.



Stick length: 552 mm (stopper not included)
 No. of Relays per stick: 50

2. Tape Packing (Surface-mounting Terminal Relays)


When ordering Relays in tape packing, add the suffix "-TR" to the model number, otherwise the Relays in stick packing will be provided.

Tape type: TB2412R (Refer to EIAJ (Electronic Industries Association of Japan))


Reel type: R24D (Refer to EIAJ (Electronic Industries Association of Japan))

Relays per reel: 1,000

Direction of Relay Insertion

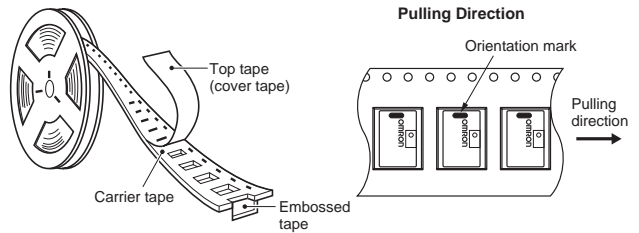


Reel Dimensions

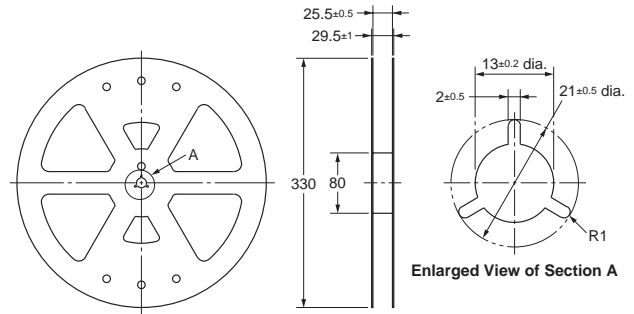

Carrier Tape Dimensions


G6L-1F

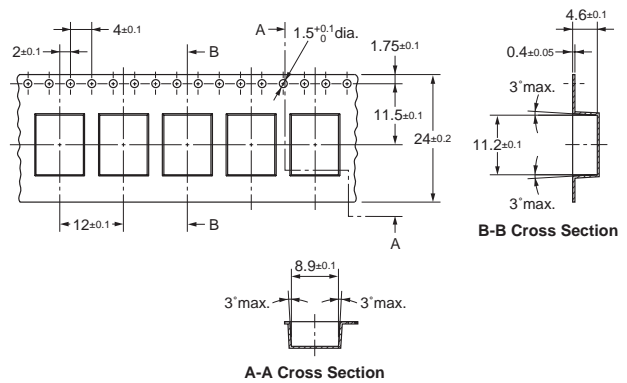


Recommended Soldering Method

Temperature Profile According to IRS

- When performing reflow-soldering, check the profile on an actual device after setting the temperature condition so that the temperatures at the relay terminals and the upper surface of the case do not exceed the limits specified in the following table.

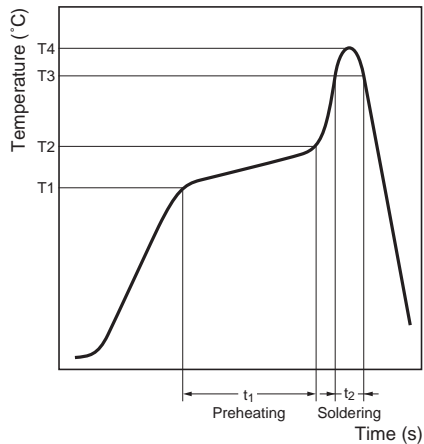

- The thickness of cream solder to be applied should be within a range between 150 and 200 μm on OMRON's recommended PCB pattern.

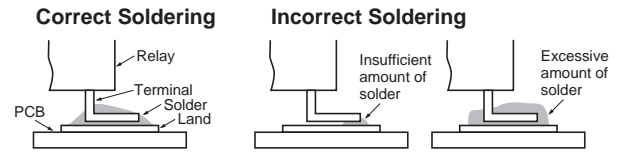

Visually check that the Relay is properly soldered.

Item Measuring position	Preheating (T1 to T2, t_1)	Soldering (T3, t_2)	Peak value (T4)
Terminal	150°C to 180°C, 120 s max.	180°C to 200°C, 20 to 30 s	245°C max.
Upper surface of case	—	—	250°C max.

■ Approved Standards

UL approval: UL60950 (File No. E41515)

CSA approval: C22.2 No.60950 (File No. LR31928)

Contact form	Coil rating	Contact rating	Number of test operations
SPST-NO	G6L-1P and G6L-1F: 3 to 24 VDC	1A at 30 VDC 0.5A at 60 VDC 0.3A at 125 VAC	6,000

Precautions

For general precautions, refer to the *PCB Relay Catalog (X033)*. Familiarize yourself with the precautions and glossary before using the G6L.

Correct Use

Handling

Leave the Relays packed until just prior to mounting them.

Soldering

Solder: JIS Z3282, H63A


Soldering temperature: Approx. 250°C (At 260°C if the DWS method is used.)

Soldering time: Approx. 5 s max. (approx. 2 s for the first time and approx. 3 s for the second time if the DWS method is used.)

Be sure to adjust the level of the molten solder so that the solder will not overflow onto the PCB.

Claw Securing Force During Automatic Insertion

During automatic insertion of Relays, make sure to set the securing force of the claws to the following values so that the Relay characteristics will be maintained.



Direction A: 5.0 N max.

Direction B: 5.0 N max.

Direction C: 5.0 N max.

Secure the claws to the area indicated by shading. Do not attach them to the center area or to only part of the Relay.

Environmental Conditions During Operation, Storage, and Transportation

Protect the Relays from direct sunlight and keep the Relays under normal temperature, humidity, and pressure.

Maximum Voltage

The maximum voltage of the coil can be obtained from the coil temperature increase and the heat-resisting temperature of coil insulating sheath material. (Exceeding the heat-resisting temperature may result in burning or short-circuiting.) The maximum voltage also involves important restrictions which include the following:

- Must not cause thermal changes in or deterioration of the insulating material.
- Must not cause damage to other control devices.
- Must not cause any harmful effect on people.
- Must not cause fire.

Therefore, be sure not to exceed the maximum voltage specified in the catalog.

As a rule, the rated voltage must be applied to the coil. A voltage exceeding the rated value, however, can be applied to the coil provided that the voltage is less than the maximum voltage. It must be noted that continuous voltage application to the coil will cause a coil temperature increase thus affecting characteristics such as electrical life and resulting in the deterioration of coil insulation.

Coating

Relays mounted on PCBs may be coated or washed. Do not apply silicone coating or detergent containing silicone, otherwise the silicone coating or detergent may remain on the surface of the Relays.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. K119-E1-01 **In the interest of product improvement, specifications are subject to change without notice.**

OMRON Corporation

Electronics Components Company

Electronic & Mechanical Components Division H.Q.

Low Signal Relay Division

2-1, 2-Chome, Nishikusatsu, Kusatsu-City,

Shiga, 525-0035 Japan

Tel: (81)77-565-5841/Fax: (81)77-565-5581

Printed in Japan

0302-2M (0701) (B)