


Product Information

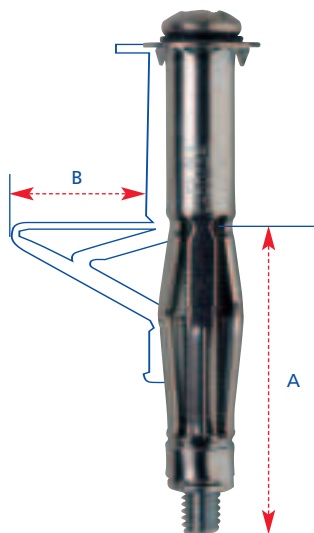

Typical applications

Coat hooks to hollow doors.
Shelves and bathroom accessories to standard plasterboard.
Radiators and kitchen cabinets to double thickness and tiled plasterboard.

DESCRIPTION

Fixing heavy objects securely in a variety of board materials. Fixtures can be removed and re-fitted, eg when moving radiators for redecoration. Can be secured using slotted or Pozzi Driv screwdriver.

Suitable for use in:

Plasterboard, Hardboard & Plywood.

Features

1. Combination head screw supplied.
2. Integral anti-rotation lugs.
3. Hinged legs positioned to maximise load capacity.
4. One piece stamping, with integral thread and flange for increased reliability.

Setting Tool




Interaset®

DESCRIPTION	HOLE DIAMETER	BOARD THICKNESS RANGE	MAX FIXTURE THICKNESS	MINIMUM CLEARANCE	MINIMUM CLEARANCE	QUANTITY	PACK	BOX
M4x20	8	2-5	10	16	5	6	41-605	41-606
M4x20						10	41-603	
M4x20						100		
M4x32		2-10	15	25	7	100		41-612
M4x40	8	8-15	15	25	8	6	41-625	41-700
M4x40 With Drill						8		
M4x40						10	41-619	
M4x40						20	41-627	
M4x40						25		
M4x40	100		41-620	41-622				
M5x40	10	5-13	15	27	9	6	41-645	41-636
M5x40						10	41-635	
M5x40						20	41-637	
M5x40						25		
M5x40						100		
M5x65	10	15-28	20	38	15	20	41-657	41-652
M5x65						25		
M5x65						100	41-654	
M6x52		13-15	20	38	13	100		41-680
M6x65	12	15-28	25	38	13	20	41-667	41-668
M6x65						25		
M6x65						100	41-670	
Setting Tool						1		41-545


Interaset® Performance Data

MATERIAL	MAXIMUM SAFE WORKING LOAD TENSION AND SHEAR					
	4x20	4x32	4x40	5x40	5x65	6x52
Plasterboard 9.5mm		9kg	10kg	12kg		
Plasterboard 12.5mm			12kg	14kg	16kg	18kg
Hollow Door	10kg	12kg				


Installation




1. Drill a hole to appropriate size.



2. Insert the fixing into the hole. Tap in lightly, ensuring that the anti-rotation lugs penetrate the face of the base material.



3. Keeping a firm forward pressure tighten the screw to set the fixing in position and then remove the screw.



4. Position the fixture, insert the screw and tighten until secure.

Technical Advisory Service Tel: +44 (0) 115 984 9142
Fax: +44 (0) 115 984 4837

Product Information



Typical applications

Securing wall and ceiling fittings, installing hooks and brackets etc.
Fixing electrical boxes, sanitary ware, cable trunking etc.
Installing shelving units and wooden battens.

DESCRIPTION

No drill required—simply pierce paper skin and screw home.
Can be used in single and double thickness plasterboard.
Ideal for use with either a power or standard Pozi Drive screwdriver.
Must only be used with screws provided.

Suitable for use in:

Plasterboard.

Features

1. Flange prevents accidental push through in plasterboard.
2. Short length ideally suited for dry-lined walls.


Metal Self-Drive

PRODUCT LENGTH	SCREW SIZE AND TYPE	MAX FIXTURE THICKNESS	QUANTITY	PACK	BOX
27mm	With 4.5x20mm Panhead Screws	10	6	07-105	07-120
			12	07-115	
			25	07-122	
			25	07-124	
			100	07-123	
			100		
27mm	With 4.5x30mm Panhead Screws	20	100		07-130
			100	07-132	


Metal Self-Drive Performance Data

MATERIAL	MAXIMUM SAFE WORKING LOAD TENSION OR SHEAR
Plasterboard 9.5mm	6kg
Plasterboard 12.5mm	8kg


Installation



1. Position the fixture and mark out holes. Using a No. 2 Pozi Drive screwdriver or screwdriver bit, push firmly into the board until thread engages.



2. Maintaining a firm pressure, screw in fixing until flush with the base material.



3. Place fixture in position, insert screw and tighten until secure.

Product Information



Typical applications

Ideal for installation of sockets, light switches and other electrical fittings.

DESCRIPTION

For cost effective fixing of lightweight items to plasterboard. Nylon construction reduces the risk of accidental electrical shock from contact with cables.

Features

1. Flange prevents accidental push through.
2. Precision tip for faster cutting.

Suitable for use in:
Plasterboard.


Nylon Self-Drill

PRODUCT LENGTH	SCREW TYPE	SCREW SIZE	MAX. FIXTURE THICKNESS	QUANTITY	PACK	BOX
37mm	Panhead	4.5x30	20	6	07-005	07-020
	Countersunk			6	07-010	
	Panhead			12	07-015	
	Countersunk			12	07-016	
	Panhead			25		
	Countersunk			25	07-022	
	Panhead			100		07-025


Nylon Self-Drill Performance Data

MATERIAL	MAXIMUM SAFE WORKING LOAD TENSION OR SHEAR
Plasterboard 9.5mm	5kg
Plasterboard 12.5mm	7kg


Installation



1. Using a screwdriver, push firmly into base material to create a small pilot hole. Where difficult, e.g. heavy wallpaper, use tip of driver to break surface and make small pilot hole.



2. Screw in the fixing until flush with the base material.



3. Place fixture in position, insert screw and tighten until secure. Use only with screw provided.