

SIEMENS

Product data sheet

3RB2056-2FW2



Abb. ähnlich / similar picture

OVERLOAD RELAY 50...200 A FOR MOTOR PROTECTION SIZE S6, CLASS 20 MOUNT. ONTO CONT./ STAND-ALONE MAIN CIRCUIT: THROUGH TRANSF. AUX. CIRCUIT: SCREW CONNECTION MANUAL-AUTOMATIC-RESET

General technical details:

Adjustable response current / of the current-dependent overload release / initial value	50 A
Adjustable response current / of the current-dependent overload release / final value	200 A
Trip class	CLASS 20
Type of assignment	2
Type of protection	PTB 06 ATEX 3001 Ex II (2) GD

Control circuit:



Design of the electrical connection / for auxiliary and control current circuit	screw-type terminals
---	----------------------

Main circuit:

Operating current / of the fuse link / rated value	315 A
Service power / for three-phase servomotors / rated value / maximum	90 kW
Service power / for three-phase servomotors / rated value / minimum	22 kW
Design of the electrical connection / for main current circuit	straight-through transformers

Auxiliary circuit:

Number of NC contacts / for auxiliary contact	1
Number of NO contacts / for auxiliary contact	1
Number of change-over switches / for auxiliary contact	0
Mechanical design:	
Type of fixing/fixation	direct mounting / stand-alone installation
Size of the contactor / can be combined / company-specific	S6
Size of overload relay	S6
Ambient conditions:	
Protection class IP	IP20

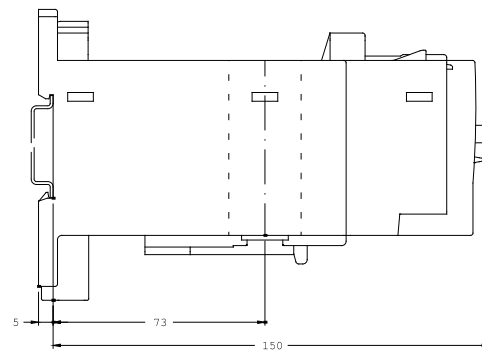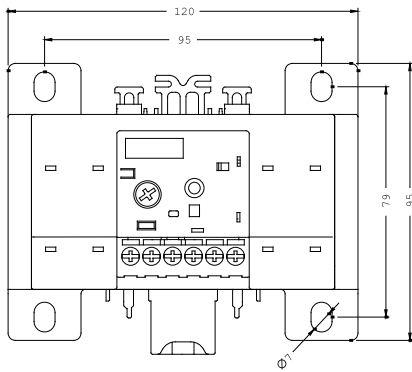

last change:

10/31/2006

Technical Assistance:

Telephone: +49 (0) 911-895-5900 (8°° - 17°° CET)

Fax: +49 (0) 911-895-5907

E-Mail: technical-assistance@siemens.com

Internet: www.siemens.de/lowvoltage/technical-assistance