



# NC7SZ57 / NC7SZ58

## TinyLogic® UHS Universal Configurable Two-Input Logic Gates

### Features

- Ultra High Speed
- Capable of Implementing any Two-Input Logic Functions
- Typical Usage Replaces Two (2) TinyLogic® Gate Devices
- Reduces Part Counts in Inventory
- Broad  $V_{CC}$  Operating Range: 1.65V to 5.5V
- Power Down High Impedance Input/Output
- Over-Voltage Tolerant Inputs Facilitate 5V to 3V Translation
- Proprietary Noise/EMI Reduction Circuitry Implemented

### Description

The NC7SZ57 and NC7SZ58 are universal configurable two-input logic gates. Each device is capable of being configured for 1 of 5 unique two-input logic functions. Any possible two-input combinatorial logic function can be implemented, as shown in the *Function Selection Table*. Device functionality is selected by how the device is wired at the board level. *Figures 4 through 13* illustrate how to connect the NC7SZ57 and NC7SZ58, respectively, for the desired logic function. All inputs have been implemented with hysteresis.

The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a broad  $V_{CC}$  operating range. The device is specified to operate over the 1.65V to 5.5V  $V_{CC}$  operating range. The input and output are high impedance when  $V_{CC}$  is 0V. Inputs tolerate voltages up to 5.5V independent of  $V_{CC}$  operating range.

### Ordering Information

| Part Number | Top Mark | Package                                     | Packing Method            |
|-------------|----------|---------------------------------------------|---------------------------|
| NC7SZ57P6X  | Z57      | 6-Lead SC70, EIAJ SC-88a, 1.25mm Wide       | 3000 Units on Tape & Reel |
| NC7SZ57L6X  | KK       | 6-Lead Micropak™, 1.0mm Wide                | 5000 Units on Tape & Reel |
| NC7SZ57FHX  | KK       | 6-Lead, MicroPak2™, 1x1mm Body, .35mm Pitch |                           |
| NC7SZ58P6X  | Z58      | 6-Lead SC70, EIAJ SC-88a, 1.25mm Wide       | 3000 Units on Tape & Reel |
| NC7SZ58L6X  | LL       | 6-Lead Micropak™, 1.0mm Wide                | 5000 Units on Tape & Reel |
| NC7SZ58FHX  | LL       | 6-Lead, MicroPak2™, 1x1mm Body, .35mm Pitch |                           |

## Pin Configurations




Figure 1. SC70 (Top View)




Figure 2. MicroPak™ (Top Through View)




Figure 3. Pin 1 Orientation

### Notes:

1. AAA represents product code top mark (see *Ordering Information*).
2. Orientation of top mark determines pin one location.
3. Reading the top mark left to right, pin one is the lower left pin.

## Pin Definitions

| Pin # SC70 | Pin # MicroPak™ | Name     | Description    |
|------------|-----------------|----------|----------------|
| 1          | 1               | $I_1$    | Data Input     |
| 2          | 2               | GND      | Ground         |
| 3          | 3               | $I_0$    | Data Input     |
| 4          | 4               | Y        | Output         |
| 5          | 5               | $V_{CC}$ | Supply Voltage |
| 6          | 6               | $I_2$    | Data Input     |

**Function Table**

| Inputs |       |       | NC7SZ57                                                           | NC7SZ58                                                           |
|--------|-------|-------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| $I_2$  | $I_1$ | $I_0$ | $Y = \overline{(I_0)} \cdot \overline{(I_2)} + (I_1) \cdot (I_2)$ | $Y = (I_0) \cdot \overline{(I_2)} + \overline{(I_1)} \cdot (I_2)$ |
| L      | L     | L     | H                                                                 | L                                                                 |
| L      | L     | H     | L                                                                 | H                                                                 |
| L      | H     | L     | H                                                                 | L                                                                 |
| L      | H     | H     | L                                                                 | H                                                                 |
| H      | L     | L     | L                                                                 | H                                                                 |
| H      | L     | H     | L                                                                 | H                                                                 |
| H      | H     | L     | H                                                                 | L                                                                 |
| H      | H     | H     | H                                                                 | L                                                                 |

H = HIGH Logic Level

L = LOW Logic Level

**Function Selection Table**

| 2-Input Logic Function                 | Device Selection | Connection Configuration |
|----------------------------------------|------------------|--------------------------|
| 2-Input AND                            | NC7SZ57          | Figure 4                 |
| 2-Input AND with Inverted Input        | NC7SZ58          | Figure 10, Figure 11     |
| 2-Input AND with Both Inputs Inverted  | NC7SZ57          | Figure 7                 |
| 2-Input NAND                           | NC7SZ58          | Figure 9                 |
| 2-Input NAND with Inverted Input       | NC7SZ57          | Figure 5, Figure 6       |
| 2-Input NAND with Both Inputs Inverted | NC7SZ58          | Figure 12                |
| 2-Input OR                             | NC7SZ58          | Figure 12                |
| 2-Input OR with Inverted Input         | NC7SZ57          | Figure 5, Figure 6       |
| 2-Input OR with Both Inputs Inverted   | NC7SZ58          | Figure 9                 |
| 2-Input NOR                            | NC7SZ57          | Figure 7                 |
| 2-Input NOR with Inverted Input        | NC7SZ58          | Figure 9, Figure 10      |
| 2-Input NOR with Both Inputs Inverted  | NC7SZ57          | Figure 4                 |
| 2-Input XOR                            | NC7SZ58          | Figure 13                |
| 2-Input XNOR                           | NC7SZ57          | Figure 8                 |

## NC7SZ57 Logic Configurations

Figure 4 through Figure 8 show the logical functions that can be implemented using the NC7SZ57. The diagrams show the DeMorgan's equivalent logic duals for a given

two-input function. The logical implementation is next to the board-level physical implementation of how the pins of the function should be connected.

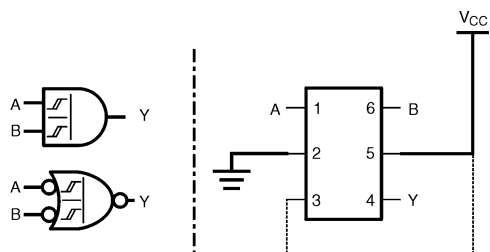


Figure 4. 2-Input AND Gate

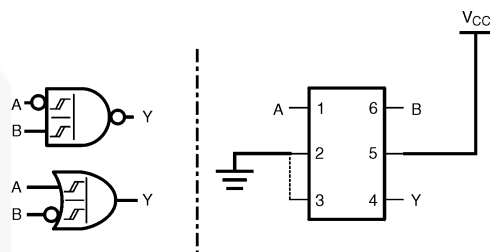


Figure 5. 2-Input NAND with Inverted A Input

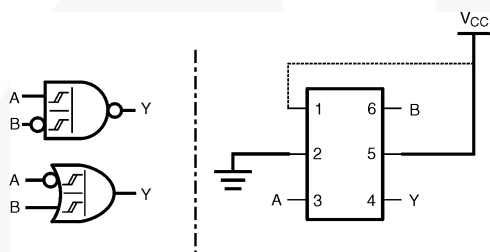


Figure 6. 2-Input NAND with Inverted B Input

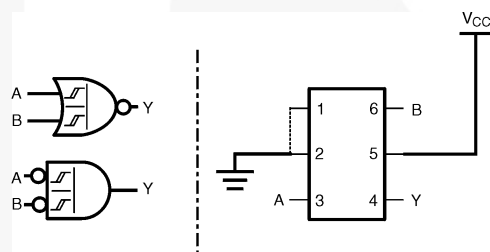


Figure 7. 2-Input NOR Gate

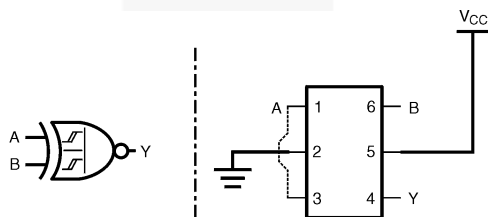


Figure 8. 2-Input XNOR Gate

## NC7SZ58 Logic Configurations

Figure 9 through Figure 13 show the logical functions that can be implemented using the NC7SZ58. The diagrams show the DeMorgan's equivalent logic duals for a given two-input function. The logical

implementation is next to the board-level physical implementation of how the pins of the function should be connected.

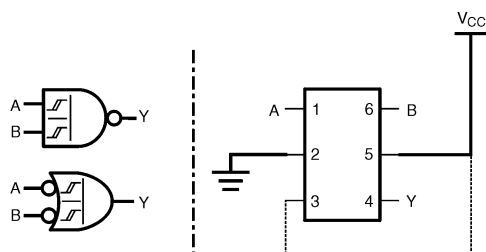


Figure 9. 2-Input NAND Gate

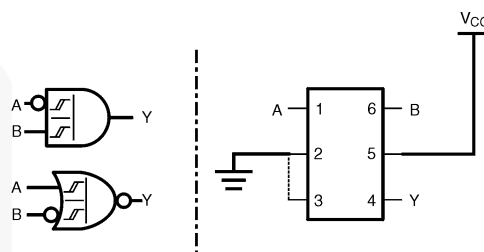


Figure 10. 2-Input AND with Inverted A Input

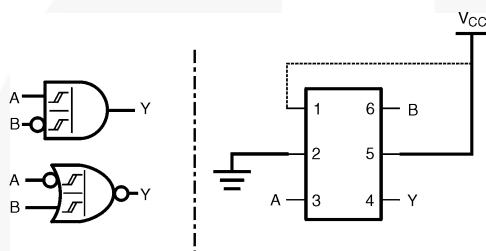


Figure 11. 2-Input AND with Inverted B Input

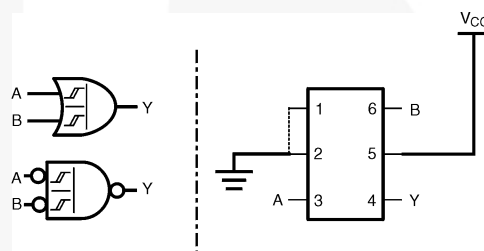


Figure 12. 2-Input OR Gate

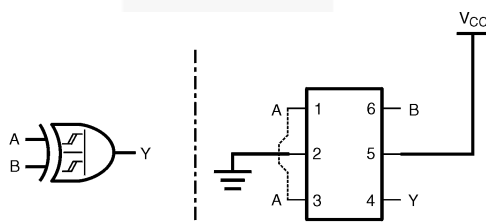


Figure 13. 2-Input XOR Gate

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol                | Parameter                               |                   | Min. | Max.     | Units |
|-----------------------|-----------------------------------------|-------------------|------|----------|-------|
| $V_{CC}$              | Supply Voltage                          |                   | -0.5 | 7.0      | V     |
| $V_{IN}$              | DC Input Voltage                        |                   | -0.5 | 7.0      | V     |
| $V_{OUT}$             | DC Output Voltage                       |                   | -0.5 | 7.0      | V     |
| $I_{IK}$              | DC Input Diode Current                  | $V_{IN} < 0.5V$   |      | -50      | mA    |
| $I_{OK}$              | DC Output Diode Current                 | $V_{OUT} < -0.5V$ |      | -50      | mA    |
| $I_{OUT}$             | DC Output Source / Sink Current         |                   |      | $\pm 50$ | mA    |
| $I_{CC}$ or $I_{GND}$ | DC $V_{CC}$ or Ground Current           |                   |      | $\pm 50$ | mA    |
| $T_{STG}$             | Storage Temperature Range               |                   | -65  | +150     | °C    |
| $T_J$                 | Maximum Junction Temperature under Bias |                   |      | +150     | °C    |
| $T_L$                 | Lead Temperature, Soldering 10 Seconds  |                   |      | +260     | °C    |
| $P_D$                 | Power Dissipation at +85°C              | MicroPak™-6       |      | 130      | mW    |
|                       |                                         | SC70-6            |      | 180      |       |
|                       |                                         | MicroPak2™-6      |      | 120      |       |
| ESD                   | Human Body Model, JEDEC:JESD22-A114     |                   |      | 4000     | V     |
|                       | Charged Device Model, JEDEC:JESD22-C101 |                   |      | 2000     |       |

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol        | Parameter                     | Conditions   | Min. | Max.     | Units |
|---------------|-------------------------------|--------------|------|----------|-------|
| $V_{CC}$      | Supply Voltage Operating      |              | 1.65 | 5.5      | V     |
|               | Supply Voltage Data Retention |              | 1.5  | 5.5      |       |
| $V_{IN}$      | Input Voltage                 |              | 0    | 5.5      | V     |
| $V_{OUT}$     | Output Voltage                |              | 0    | $V_{CC}$ | V     |
| $T_A$         | Operating Temperature         |              | -40  | +85      | °C    |
| $\theta_{JA}$ | Thermal Resistance            | SC70-6       |      | 350      | °C/W  |
|               |                               | MicroPak™-6  |      | 500      |       |
|               |                               | MicroPak2™-6 |      | 560      |       |

## DC Electrical Characteristics

| Symbol          | Parameter                  | V <sub>CC</sub> | Conditions                                                                      | T <sub>A</sub> =+25°C   |      |      | T <sub>A</sub> =-40 to +85°C |      | Units |
|-----------------|----------------------------|-----------------|---------------------------------------------------------------------------------|-------------------------|------|------|------------------------------|------|-------|
|                 |                            |                 |                                                                                 | Min.                    | Typ. | Max. | Min.                         | Max. |       |
| V <sub>P</sub>  | Positive Threshold Voltage | 1.65            |                                                                                 | 0.60                    | 0.99 | 1.40 | 0.60                         | 1.40 | V     |
|                 |                            | 2.30            |                                                                                 | 1.00                    | 1.39 | 1.80 | 1.00                         | 1.80 |       |
|                 |                            | 3.00            |                                                                                 | 1.30                    | 1.77 | 2.20 | 1.30                         | 2.20 |       |
|                 |                            | 4.50            |                                                                                 | 1.90                    | 2.49 | 3.10 | 1.90                         | 3.10 |       |
|                 |                            | 5.50            |                                                                                 | 2.20                    | 2.95 | 3.60 | 2.20                         | 3.60 |       |
| V <sub>N</sub>  | Negative Threshold Voltage | 1.65            |                                                                                 | 0.20                    | 0.50 | 0.90 | 0.20                         | 0.90 | V     |
|                 |                            | 2.30            |                                                                                 | 0.40                    | 0.75 | 1.15 | 0.40                         | 1.15 |       |
|                 |                            | 3.00            |                                                                                 | 0.60                    | 0.99 | 1.50 | 0.60                         | 1.50 |       |
|                 |                            | 4.50            |                                                                                 | 1.00                    | 1.43 | 2.00 | 1.00                         | 2.00 |       |
|                 |                            | 5.50            |                                                                                 | 1.20                    | 1.70 | 2.30 | 1.20                         | 2.30 |       |
| V <sub>H</sub>  | Hysteresis Voltage         | 1.65            |                                                                                 | 0.15                    | 0.48 | 0.90 | 0.15                         | 0.90 | V     |
|                 |                            | 2.30            |                                                                                 | 0.25                    | 0.64 | 1.10 | 0.25                         | 1.10 |       |
|                 |                            | 3.00            |                                                                                 | 0.40                    | 0.78 | 1.20 | 0.40                         | 1.20 |       |
|                 |                            | 4.50            |                                                                                 | 0.60                    | 1.06 | 1.50 | 0.60                         | 1.50 |       |
|                 |                            | 5.50            |                                                                                 | 0.70                    | 1.25 | 1.70 | 0.70                         | 1.70 |       |
| V <sub>OH</sub> | HIGH Level Output Voltage  | 1.65            | V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OH</sub> = -100μA | 1.55                    | 1.65 |      | 1.55                         |      | V     |
|                 |                            | 2.30            |                                                                                 | 2.20                    | 2.30 |      | 2.20                         |      |       |
|                 |                            | 3.00            |                                                                                 | 2.90                    | 3.00 |      | 2.90                         |      |       |
|                 |                            | 4.50            |                                                                                 | 4.40                    | 4.50 |      | 4.40                         |      |       |
|                 |                            | 1.65            | V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>                             | I <sub>OH</sub> = -4mA  | 1.29 | 1.52 | 1.29                         |      |       |
|                 |                            | 2.30            |                                                                                 | I <sub>OH</sub> = -8mA  | 1.90 | 2.15 | 1.90                         |      |       |
|                 |                            | 3.00            |                                                                                 | I <sub>OH</sub> = -16mA | 2.40 | 2.80 | 2.40                         |      |       |
|                 |                            | 3.00            |                                                                                 | I <sub>OH</sub> = -24mA | 2.30 | 2.68 | 2.30                         |      |       |
|                 |                            | 4.50            |                                                                                 | I <sub>OH</sub> = -32mA | 3.80 | 4.20 | 3.80                         |      |       |
|                 |                            |                 |                                                                                 |                         |      |      |                              |      |       |

Continued on the following page...

## DC Electrical Characteristics (Continued)

| Symbol           | Parameter                 | V <sub>CC</sub> | Conditions                                                                    | T <sub>A</sub> =+25°C |      |      | T <sub>A</sub> =-40 to +85°C |      | Units |
|------------------|---------------------------|-----------------|-------------------------------------------------------------------------------|-----------------------|------|------|------------------------------|------|-------|
|                  |                           |                 |                                                                               | Min.                  | Typ. | Max. | Min.                         | Max. |       |
| V <sub>OL</sub>  | LOW Level Output Voltage  | 1.65            | V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub><br>I <sub>OL</sub> =100μA |                       |      | 0.10 |                              | 0.10 | V     |
|                  |                           | 2.30            |                                                                               |                       |      | 0.10 |                              | 0.10 |       |
|                  |                           | 3.00            |                                                                               |                       |      | 0.10 |                              | 0.10 |       |
|                  |                           | 4.50            |                                                                               |                       |      | 0.10 |                              | 0.10 |       |
|                  |                           | 1.65            | V <sub>IN</sub> =V <sub>IH</sub> or V <sub>IL</sub>                           | I <sub>OL</sub> =4mA  | 0.08 | 0.24 |                              | 0.24 |       |
|                  |                           | 2.30            |                                                                               | I <sub>OL</sub> =8mA  | 0.10 | 0.30 |                              | 0.30 |       |
|                  |                           | 3.00            |                                                                               | I <sub>OL</sub> =16mA | 0.15 | 0.40 |                              | 0.40 |       |
|                  |                           | 3.00            |                                                                               | I <sub>OL</sub> =24mA | 0.22 | 0.55 |                              | 0.55 |       |
|                  |                           | 4.50            |                                                                               | I <sub>OL</sub> =32mA | 0.22 | 0.55 |                              | 0.55 |       |
| I <sub>IN</sub>  | Input Leakage Current     | 0 to 5.50       | V <sub>IN</sub> = 5.5V, GND                                                   |                       |      | ±0.1 |                              | ±1.0 | μA    |
| I <sub>OFF</sub> | Power Off Leakage Current | 0               | V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V                                    |                       |      | 1    |                              | 10   | μA    |
| I <sub>CC</sub>  | Quiescent Supply Current  | 1.65 to 5.5     | V <sub>IN</sub> = 5.5V, GND                                                   |                       |      | 1    |                              | 10   | μA    |

## AC Electrical Characteristics


| Symbol                              | Parameter                             | V <sub>CC</sub> | Conditions                                    | T <sub>A</sub> =25°C |      |      | T <sub>A</sub> =-40 to 85°C |      | Units | Figure                 |
|-------------------------------------|---------------------------------------|-----------------|-----------------------------------------------|----------------------|------|------|-----------------------------|------|-------|------------------------|
|                                     |                                       |                 |                                               | Min.                 | Typ. | Max. | Min.                        | Max. |       |                        |
| t <sub>PHL</sub> , t <sub>PLH</sub> | Propagation Delay I <sub>n</sub> to Y | 1.8 ± 0.15      | C <sub>L</sub> =15pF, R <sub>L</sub> =1MΩ     | 3.0                  | 8.0  | 14.0 | 3.0                         | 14.5 | ns    | Figure 14<br>Figure 16 |
|                                     |                                       | 2.5 ± 0.2       |                                               | 1.5                  | 4.9  | 8.0  | 1.5                         | 8.5  |       |                        |
|                                     |                                       | 3.3 ± 0.3       |                                               | 1.2                  | 3.7  | 5.3  | 1.2                         | 5.7  |       |                        |
|                                     |                                       | 5.0 ± 0.5       |                                               | 0.8                  | 2.8  | 4.3  | 0.8                         | 4.6  |       |                        |
|                                     |                                       | 3.3 ± 0.3       | C <sub>L</sub> =50pF,<br>R <sub>L</sub> =500Ω | 1.5                  | 4.2  | 6.0  | 1.5                         | 6.5  |       |                        |
|                                     |                                       | 5.0 ± 0.5       |                                               | 1.0                  | 3.4  | 4.9  | 1.0                         | 5.3  |       |                        |
| C <sub>IN</sub>                     | Input Capacitance                     | 0               |                                               |                      | 2    |      |                             |      | pF    |                        |
| C <sub>PD</sub>                     | Power Dissipation Capacitance         | 3.3             | Note 4                                        |                      | 14   |      |                             |      | pF    | Figure 15              |
|                                     |                                       | 5.0             |                                               |                      | 17   |      |                             |      |       |                        |

### Note:

- C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle. (See Figure 12) C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>)(V<sub>CC</sub>)(f<sub>in</sub>) + (I<sub>CCstatic</sub>).




## AC Loadings and Waveforms

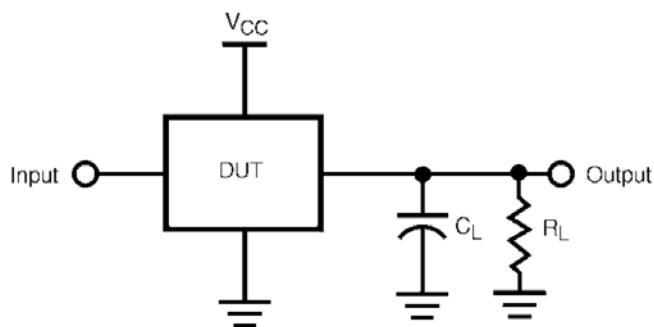

**Note:**

5.  $C_L$  includes load and stray capacitance.
6. Input PRR = 1.0MHz,  $t_w$  = 500ns.

Figure 14. AC Test Circuit

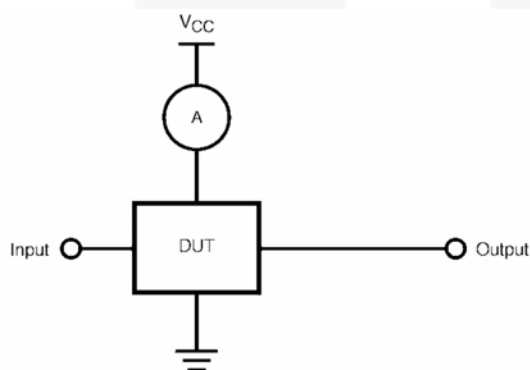

**Note:**

7. Input = AC waveforms.
8. PRR = Variable; Duty Cycle = 50%.

Figure 15.  $I_{CCD}$  Test Circuit


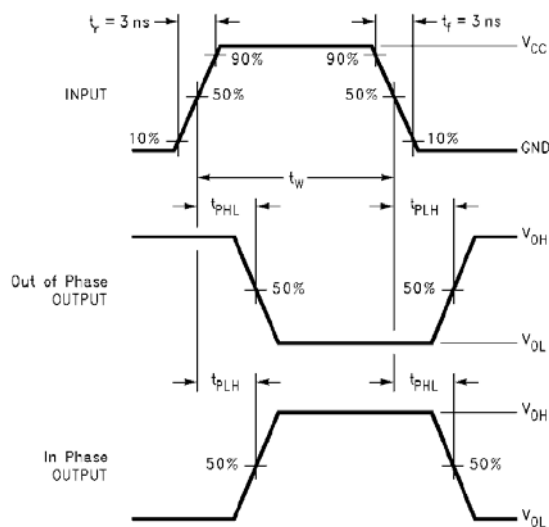


Figure 16. AC Waveforms

## Physical Dimensions

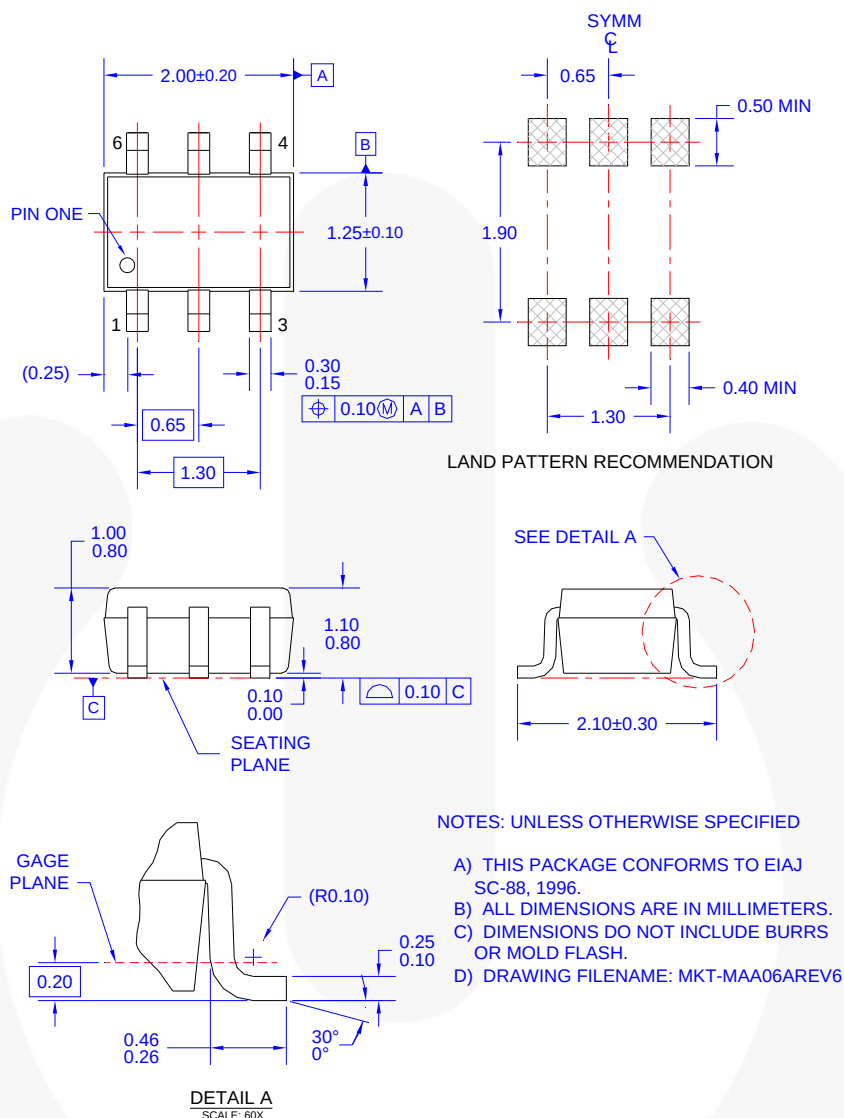

**Figure 17. 6-Lead, SC70, EIAJ SC-88a, 1.25mm Wide**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>


## Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications:

[http://www.fairchildsemi.com/products/analog/pdf/sc70-6\\_tr.pdf](http://www.fairchildsemi.com/products/analog/pdf/sc70-6_tr.pdf)

| Package Designator | Tape Section       | Cavity Number | Cavity Status | Cover Type Status |
|--------------------|--------------------|---------------|---------------|-------------------|
| P6X                | Leader (Start End) | 125 (Typical) | Empty         | Sealed            |
|                    | Carrier            | 3000          | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (Typical)  | Empty         | Sealed            |

## Physical Dimensions

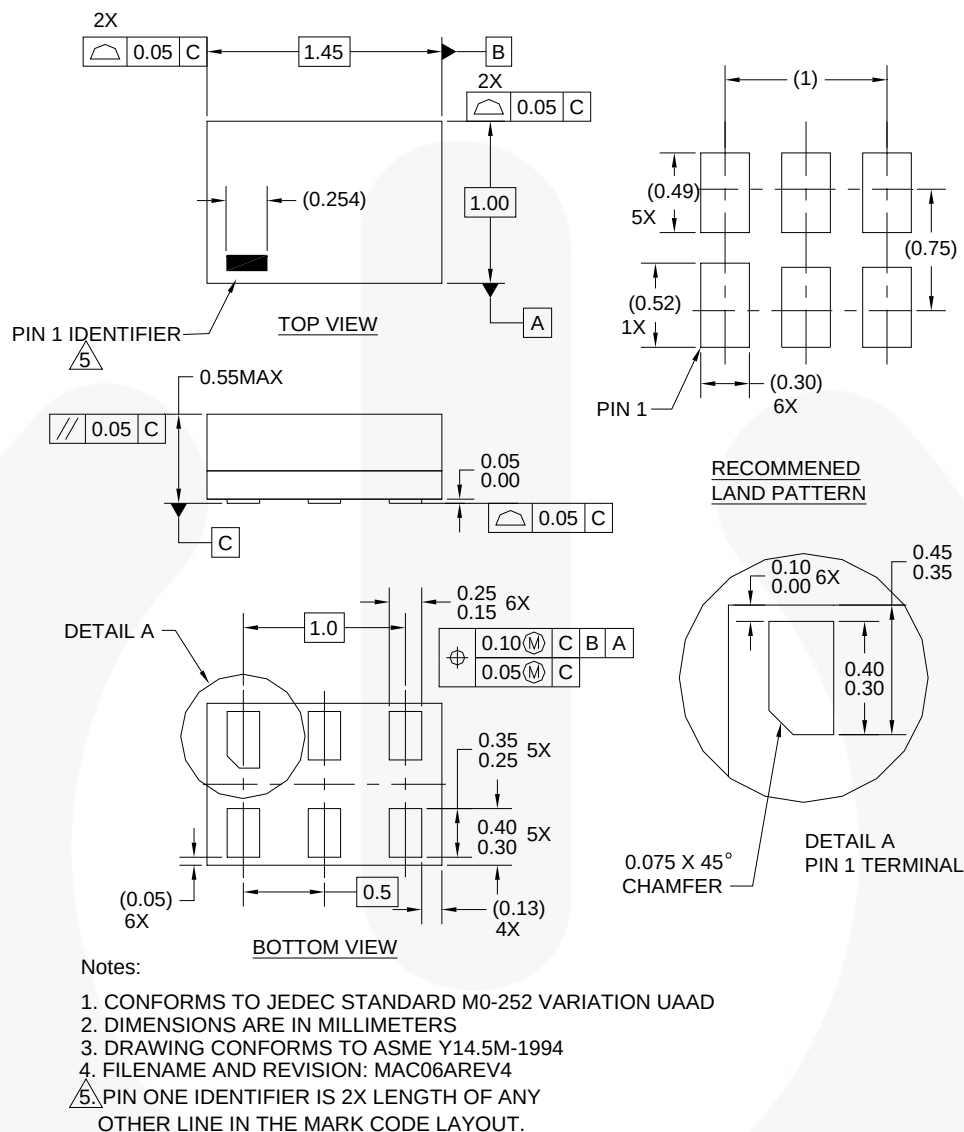

**Figure 18. 6-Lead, MicroPak™, 1.0mm Wide**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>


## Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications:

[http://www.fairchildsemi.com/products/logic/pdf/micropak\\_tr.pdf](http://www.fairchildsemi.com/products/logic/pdf/micropak_tr.pdf)

| Package Designator | Tape Section       | Cavity Number | Cavity Status | Cover Type Status |
|--------------------|--------------------|---------------|---------------|-------------------|
| L6X                | Leader (Start End) | 125 (Typical) | Empty         | Sealed            |
|                    | Carrier            | 5000          | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (Typical)  | Empty         | Sealed            |

## Physical Dimensions

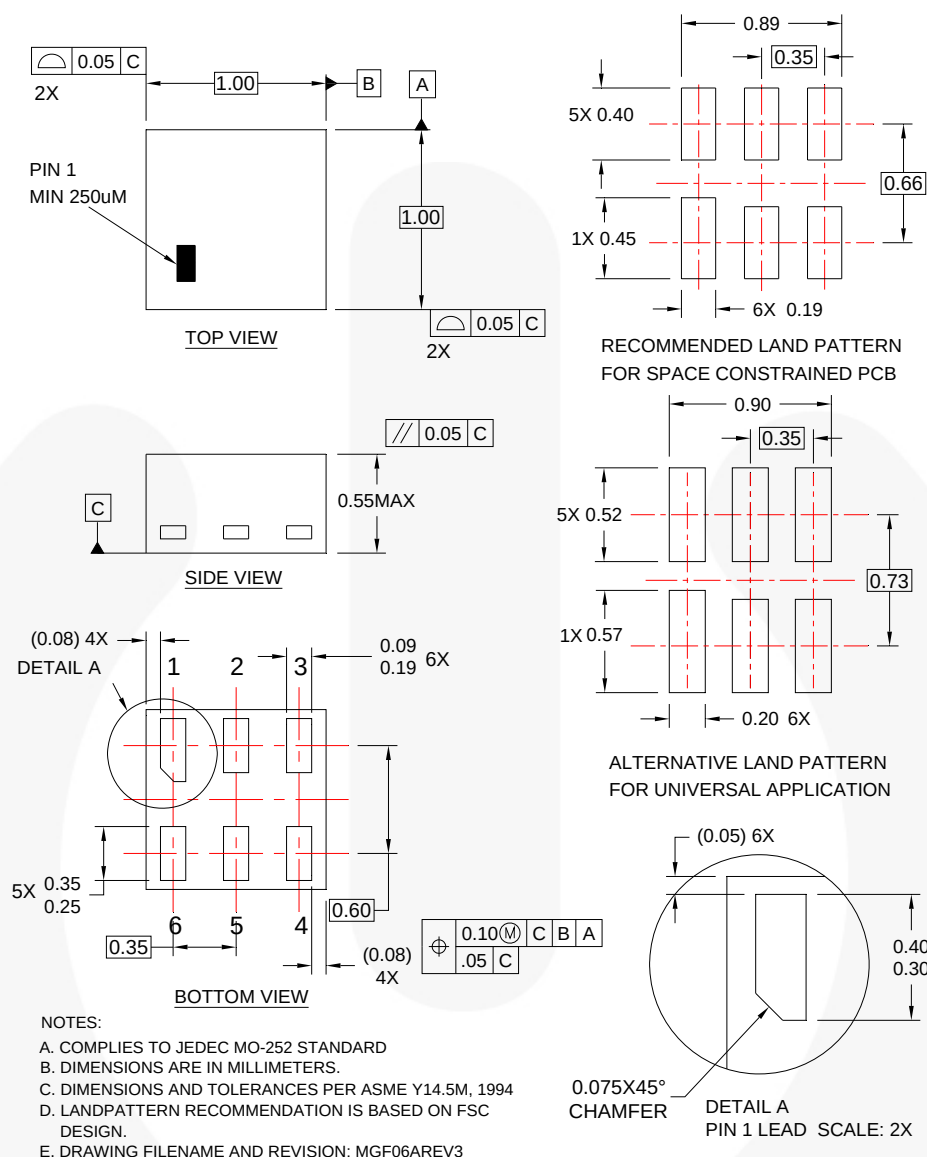

**Figure 19. 6-Lead, MicroPak2™, 1x1mm Body, .35mm Pitch**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>

## Tape and Reel Specifications

Please visit Fairchild Semiconductor's online packaging area for the most recent tape and reel specifications:  
[http://www.fairchildsemi.com/packaging/MicroPAK2\\_6L\\_tr.pdf](http://www.fairchildsemi.com/packaging/MicroPAK2_6L_tr.pdf)

| Package Designator | Tape Section       | Cavity Number | Cavity Status | Cover Type Status |
|--------------------|--------------------|---------------|---------------|-------------------|
| FHX                | Leader (Start End) | 125 (Typical) | Empty         | Sealed            |
|                    | Carrier            | 5000          | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (Typical)  | Empty         | Sealed            |



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™  
AccuPower™  
Auto-SPM™  
AX-CAPT™  
BitSiC®  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™  
**F**®  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FETBench™  
FlashWriter®

FPS™  
F-PFS™  
FRFET®  
Global Power Resource™  
Green FPST™  
Green FPST™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
Making Small Speakers Sound Louder  
and Better™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
Motion-SPM™  
mWVaver™  
OptoHiT™  
OPTOLOGIC®  
OPTOPLANAR®

PDP SPM™  
Power-SPM™  
PowerTrench®  
PowerXST™  
Programmable Active Droop™  
QFET®  
QST™  
Quiet Series™  
RapidConfigure™  
™  
Saving our world, 1mW/W/KW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™-3  
SuperSOT™-6  
SuperSOT™-8  
SupreMOS®  
SyncFET™  
Sync-Lock™  
 SYSTEM  
GENERAL®

The Power Franchise®  
**the power**  
franchise  
TinyBoost™  
TinyBuck™  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TranSiC®  
TriFault Detect™  
TRUECURRENT®  
µSerDes™  
 SerDes™  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
VoltagePlus™  
XST™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. I57