
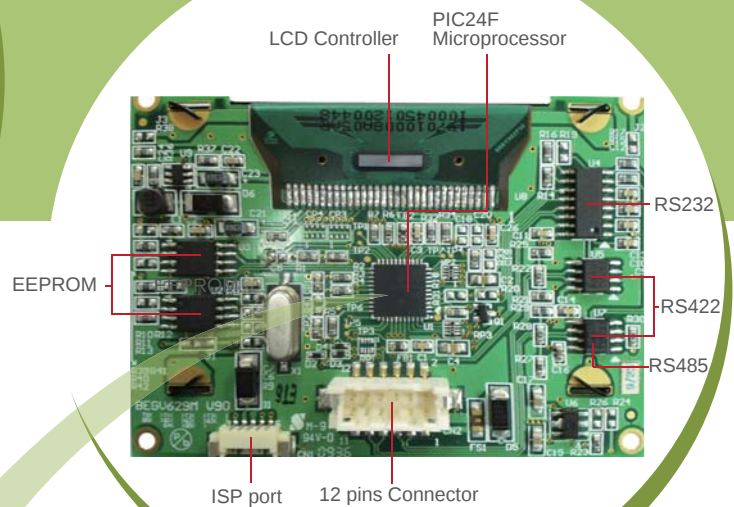


BEGV629M

μ p Display Embedded System

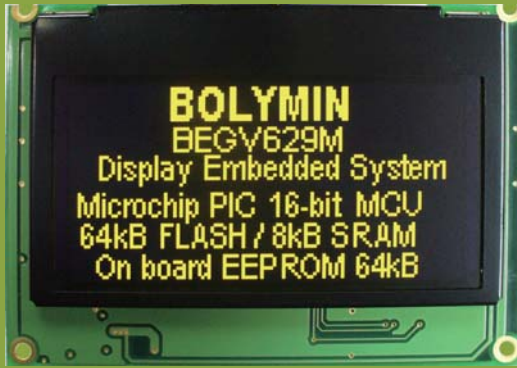

Your 64KB
application program
here!

Features

- High performance, Low power PIC 16-bit microprocessor
- Built-in 64KB ISP Flash memory / 8KB SRAM
- On board updateable 64KB EEPROM (128KB option)
- 1 x RS485 / 422 / 232, 1 x RS232
- Current consumption 150mA
- On-chip power-on reset (POR) and programmable watchdog reset
- 128 x 64 monochrome OLED
- Comprehensive set of development tools and application notes for self programming
- RS485 / 422 / 232 driver, I²C EEPROM driver, OLED driver and utility are supported
- Dimension (W x H x D): 75 x 52.7 x 12.3mm

Hardware Specifications

Processor

- Microchip PIC24FJ64GA004 16-bit microprocessor

Memory

- 64KB in-system programmable flash
- 8KB internal SRAM
- 64KB x 1 external I²C CMOS EEPROM (option: 64KBx2)

Display Interface

- Support 8-bit 128 x 64 monochrome OLED

RS232 / 422 / 485 Port

- Support dual serial port, one is three-wired RS232, another is shared in among RS232/422/485 port by option

Software Utilities

- Support RS232 / 422 / 485 driver, I²C EEPROM driver, and OLED driver for free

DC Requirement

- DC4.5V~5.5V




BOLYMIN, INC.

Packing List

- BEGV629M Embedded System
- User Manual
- Software Utility Disc
- ICD 3 and ISP Cable (option)

BEGV629M BLOCK DIAGRAM

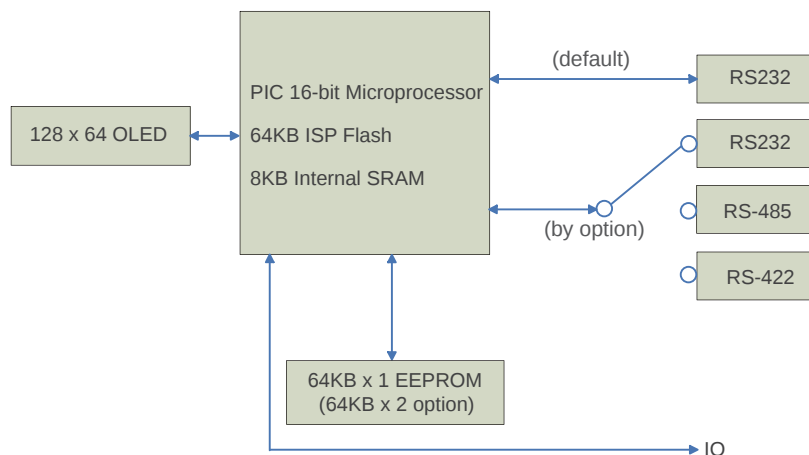

Pin Mapping Table

PIN NO.	Signal	PIN NO.	Signal
1	VDD	7	422TP/485P/TX1
2	GND	8	IOA
3	422RP	9	422TN/485N/RX1
4	TX0	10	IOB
5	422RN	11	/RST
6	RX0	12	IOC

Order Information

Parts NO.	Description	RS232-A	RS232-B	RS422	RS485
BEGV629M	Dual RS232	☆	☆		
BEGV629M1	One RS232	☆			
BEGV629M2	One RS232/One RS422	☆		☆	
BEGV629M3	One RS232/One RS485	☆			☆

BEGV606M/627M/629M/639M

Display Embedded System

µp



MICROCHIP PIC 16bit microprocessor
 PIC24FJ64GA004
 64K Bytes In-system programmable flash
 8K Bytes SRAM



240 x 64 STN



128 x 64 OLED



BEGV639M



BEGV629M



MICROCHIP PIC 16bit microprocessor
 PIC24FJ64GA002
 64K Bytes In-system programmable flash
 8K Bytes SRAM



128 x 64 STN



20 x 2 STN



BEGV627M




BEGV606M

I²C



(Real-time clock)



(A/D Converter)

isolated / isolated
RS-485 RS-422



(PLC)

RS232



(Terminal)



BOLYMIN, INC.