

## FXL5T244

### Low Voltage Dual Supply 5-Bit Signal Translator with Configurable Voltage Supplies and Signal Levels and 3-STATE Outputs

#### General Description

The FXL5T244 is a configurable dual-voltage-supply translator designed for one-way (unidirectional) voltage translation of signals between two voltage levels. The device allows translation between voltages as high as 3.6V to as low as 1.1V. A Inputs and the  $\overline{OE}$  Control Pin track the  $V_{CCI}$  level, and Y Outputs track the  $V_{CCO}$  level. Both inputs and outputs are designed to accept supply voltage levels from 1.1V to 3.6V. This allows for unidirectional voltage translation over a variety of voltage levels: 1.2V, 1.5V, 1.8V, 2.5V, and 3.3V.

The device remains in 3-STATE until both  $V_{CC}$ s reach active levels allowing either  $V_{CC}$  to be powered-up first. The device also contains power down control circuits that place the device in 3-STATE if either  $V_{CC}$  is removed. The  $\overline{OE}$  input, when HIGH, disables the outputs by placing them in 3-STATE condition.

#### Features

- One-way (unidirectional) translation between any 2 levels from 1.1V to 3.6V
- Fully configurable, inputs and outputs track respective  $V_{CC}$  levels
- Non-preferential power-up sequencing; either  $V_{CC}$  may be powered-up first
- Outputs remain in 3-STATE until active  $V_{CC}$  level is reached
- Outputs switch to 3-STATE if either  $V_{CC}$  is at GND
- Power-off protection
- Control input ( $\overline{OE}$ ) level is referenced to  $V_{CCI}$  voltage
- Packaged in 14-terminal DQFN (2.5mm x 3.0mm) package
- ESD protection exceeds:
  - 4kV HBM ESD (per JESD22-A114 & Mil Std 883e 3015.7)
  - 8kV HBM I/O to GND ESD (per JESD22-A114 & Mil Std 883e 3015.7)
  - 1kV CDM ESD (per ESD STM 5.3)
  - 200V MM ESD (per JESD22-A115 & ESD STM5.2)

#### Ordering Code:

| Order Number | Package Number | Package Description                                                                         |
|--------------|----------------|---------------------------------------------------------------------------------------------|
| FXL5T244BQX  | MLP014A        | 14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm |

FXL5T244 Low Voltage Dual Supply 5-Bit Signal Translator with Configurable Voltage Supplies and Signal Levels and 3-STATE Outputs

## Terminal Descriptions

| Terminal Names  | Description          |
|-----------------|----------------------|
| $\overline{OE}$ | Output Enable Input  |
| $A_n$           | Data Inputs          |
| $Y_n$           | 3-STATE Outputs      |
| $V_{CCI}$       | Inputs Power Supply  |
| $V_{CCO}$       | Outputs Power Supply |
| GND             | Ground               |


## Truth Table

| Inputs          |       | Outputs |
|-----------------|-------|---------|
| $\overline{OE}$ | $A_n$ | $Y_n$   |
| L               | L     | L       |
| L               | H     | H       |
| H               | X     | 3-STATE |

H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care

## Connection Diagram

Terminal Assignments for DQFN

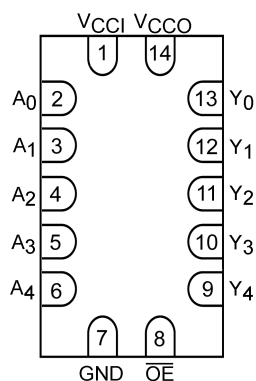

(Top View)

## Terminal Assignment

| Terminal Number | Terminal Name   |
|-----------------|-----------------|
| 1               | $V_{CCI}$       |
| 2               | $A_0$           |
| 3               | $A_1$           |
| 4               | $A_2$           |
| 5               | $A_3$           |
| 6               | $A_4$           |
| 7               | GND             |
| 8               | $\overline{OE}$ |
| 9               | $Y_4$           |
| 10              | $Y_3$           |
| 11              | $Y_2$           |
| 12              | $Y_1$           |
| 13              | $Y_0$           |
| 14              | $V_{CCO}$       |

## Power-Up/Power-Down Sequencing

FXL translators offer an advantage in that either  $V_{CC}$  may be powered up first. This benefit derives from the chip design. When either  $V_{CC}$  is at 0 volts, outputs are in a HIGH-Impedance state. The control input,  $\overline{OE}$ , is designed to track the  $V_{CCI}$  supply. A pull-up resistor tying  $\overline{OE}$  to  $V_{CCI}$  should be used to ensure that bus contention, excessive currents, or oscillations do not occur during power-up/power-down. The size of the pull-up resistor is based upon the current-sinking capability of the  $\overline{OE}$  driver.

The recommended power-up sequence is the following:

1. Apply power to either  $V_{CC}$ .
2. Apply power to the  $\overline{OE}$  input (Logic HIGH for A-to-B operation; Logic LOW for B-to-A operation) and to the respective data inputs (A Port or B Port). This may occur at the same time as Step 1.
3. Apply power to other  $V_{CC}$ .
4. Drive the  $\overline{OE}$  input LOW to enable the device.

The recommended power-down sequence is the following:

1. Drive  $\overline{OE}$  input HIGH to disable the device.
2. Remove power from either  $V_{CC}$ .
3. Remove power from other  $V_{CC}$ .

**Absolute Maximum Ratings**(Note 1)

|                                                                 |                           |
|-----------------------------------------------------------------|---------------------------|
| Supply Voltage                                                  |                           |
| $V_{CCI}$                                                       | -0.5V to +4.6V            |
| $V_{CCO}$                                                       | -0.5V to +4.6V            |
| DC Input Voltage ( $V_I$ )                                      | -0.5V to +4.6V            |
| Output Voltage ( $V_O$ ) (Note 2)                               |                           |
| Outputs 3-STATE                                                 | -0.5V to +4.6V            |
| Outputs Active                                                  | -0.5V to $V_{CCO} + 0.5V$ |
| DC Input Diode Current ( $I_{IK}$ ) $V_I < 0V$                  | -50 mA                    |
| DC Output Diode Current ( $I_{OK}$ )                            |                           |
| $V_O < 0V$                                                      | -50 mA                    |
| $V_O > V_{CC}$                                                  | +50 mA                    |
| DC Output Source/Sink Current ( $I_{OH}/I_{OL}$ )               | -50 mA / +50 mA           |
| DC $V_{CC}$ or Ground Current per Supply Pin ( $I_{CC}$ or GND) | $\pm 100$ mA              |
| Storage Temperature Range ( $T_{STG}$ )                         | -65°C to +150°C           |

**Recommended Operating Conditions** (Note 3)

|                                                   |                |
|---------------------------------------------------|----------------|
| Power Supply Operating ( $V_{CCI}$ or $V_{CCO}$ ) | 1.1V to 3.6V   |
| Input Voltage                                     |                |
| $A_n$                                             | 0.0V to 3.6V   |
| Control Inputs ( $\overline{OE}$ )                | 0.0V to 3.6V   |
| Output Current in $I_{OH}/I_{OL}$                 |                |
| $V_{CCO} = 3.0V$ to 3.6V                          | $\pm 24$ mA    |
| $V_{CCO} = 2.3V$ to 2.7V                          | $\pm 18$ mA    |
| $V_{CCO} = 1.65V$ to 1.95V                        | $\pm 6$ mA     |
| $V_{CCO} = 1.4V$ to 1.65V                         | $\pm 2$ mA     |
| $V_{CCO} = 1.1V$ to 1.4V                          | $\pm 0.5$ mA   |
| Free Air Operating Temperature ( $T_A$ )          | -40°C to +85°C |
| Minimum Input Edge Rate ( $\Delta V/\Delta t$ )   |                |
| $V_{CCA/B} = 1.1V$ to 3.6V                        | 10 ns/V        |

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:**  $I_O$  Absolute Maximum Rating must be observed.

**Note 3:** All unused inputs must be held at  $V_{CCI}$  or GND.

**DC Electrical Characteristics**

| Symbol   | Parameter                 | Conditions            | $V_{CCI}$<br>(V) | $V_{CCO}$<br>(V) | Min                   | Max                   | Units |
|----------|---------------------------|-----------------------|------------------|------------------|-----------------------|-----------------------|-------|
| $V_{IH}$ | High Level Input Voltage  |                       | 2.7 - 3.6        | 1.1 - 3.6        | 2.0                   |                       | V     |
|          |                           |                       | 2.3 - 2.7        |                  | 1.6                   |                       |       |
|          |                           |                       | 1.65 - 2.3       |                  | $0.65 \times V_{CCI}$ |                       |       |
|          |                           |                       | 1.4 - 1.65       |                  | $0.65 \times V_{CCI}$ |                       |       |
|          |                           |                       | 1.1 - 1.4        |                  | $0.9 \times V_{CCI}$  |                       |       |
| $V_{IL}$ | Low Level Input Voltage   |                       | 2.7 - 3.6        | 1.1 - 3.6        |                       | 0.8                   | V     |
|          |                           |                       | 2.3 - 2.7        |                  |                       | 0.7                   |       |
|          |                           |                       | 1.65 - 2.3       |                  |                       | $0.35 \times V_{CCI}$ |       |
|          |                           |                       | 1.4 - 1.65       |                  |                       | $0.35 \times V_{CCI}$ |       |
|          |                           |                       | 1.1 - 1.4        |                  |                       | $0.1 \times V_{CCI}$  |       |
| $V_{OH}$ | High Level Output Voltage | $I_{OH} = -100 \mu A$ | 1.1 - 3.6        | 1.1 - 3.6        | $V_{CCO} - 0.2$       |                       | V     |
|          |                           | $I_{OH} = -12$ mA     | 2.7              | 2.7              | 2.2                   |                       |       |
|          |                           | $I_{OH} = -18$ mA     | 3.0              | 3.0              | 2.4                   |                       |       |
|          |                           | $I_{OH} = -24$ mA     | 3.0              | 3.0              | 2.2                   |                       |       |
|          |                           | $I_{OH} = -6$ mA      | 2.3              | 2.3              | 2.0                   |                       |       |
|          |                           | $I_{OH} = -12$ mA     | 2.3              | 2.3              | 1.8                   |                       |       |
|          |                           | $I_{OH} = -18$ mA     | 2.3              | 2.3              | 1.7                   |                       |       |
|          |                           | $I_{OH} = -6$ mA      | 1.65             | 1.65             | 1.25                  |                       |       |
|          |                           | $I_{OH} = -2$ mA      | 1.4              | 1.4              | 1.05                  |                       |       |
|          |                           | $I_{OH} = -0.5$ mA    | 1.1              | 1.1              | $0.75 \times V_{CCO}$ |                       |       |

## DC Electrical Characteristics (Continued)

| Symbol                      | Parameter                                                                                                  | Conditions                                                   | V <sub>CCI</sub><br>(V) | V <sub>CCO</sub><br>(V) | Min | Max                    | Units |
|-----------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------|-------------------------|-----|------------------------|-------|
| V <sub>OL</sub>             | Low Level Output Voltage                                                                                   | I <sub>OL</sub> = 100μA                                      | 1.1 - 3.6               | 1.1 - 3.6               |     | 0.2                    | V     |
|                             |                                                                                                            | I <sub>OL</sub> = 12 mA                                      | 2.7                     | 2.7                     |     | 0.4                    |       |
|                             |                                                                                                            | I <sub>OL</sub> = 18 mA                                      | 3.0                     | 3.0                     |     | 0.4                    |       |
|                             |                                                                                                            | I <sub>OL</sub> = 24 mA                                      | 3.0                     | 3.0                     |     | 0.55                   |       |
|                             |                                                                                                            | I <sub>OL</sub> = 12 mA                                      | 2.3                     | 2.3                     |     | 0.4                    |       |
|                             |                                                                                                            | I <sub>OL</sub> = 18 mA                                      | 2.3                     | 2.3                     |     | 0.6                    |       |
|                             |                                                                                                            | I <sub>OL</sub> = 6 mA                                       | 1.65                    | 1.65                    |     | 0.3                    |       |
|                             |                                                                                                            | I <sub>OL</sub> = 2 mA                                       | 1.4                     | 1.4                     |     | 0.35                   |       |
|                             |                                                                                                            | I <sub>OL</sub> = 0.5 mA                                     | 1.1                     | 1.1                     |     | 0.3 x V <sub>CCI</sub> |       |
| I <sub>I</sub>              | Input Leakage Current                                                                                      | V <sub>I</sub> = V <sub>CCI</sub> or GND                     | 1.1 - 3.6               | 3.6                     |     | ±1.0                   | μA    |
| I <sub>OFF</sub>            | Power Off Leakage Current                                                                                  | A <sub>tri</sub> , $\overline{OE}$ = 0V to 3.6V              | 0                       | 3.6                     |     | ±10.0                  | μA    |
|                             |                                                                                                            | V <sub>ri</sub> = 0V to 3.6V                                 | 3.6                     | 0                       |     | ±10.0                  |       |
| I <sub>OZ</sub><br>(Note 4) | 3-STATE Output Leakage<br>0 ≤ V <sub>O</sub> ≤ 3.6V<br>V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> | $\overline{OE}$ = V <sub>IH</sub>                            | 3.6                     | 3.6                     |     | ±10.0                  | μA    |
|                             |                                                                                                            | $\overline{OE}$ = Don't Care                                 | 0                       | 3.6                     |     | +10.0                  |       |
|                             |                                                                                                            | $\overline{OE}$ = Don't Care                                 | 3.6                     | 0                       |     | +10.0                  |       |
| I <sub>CCIO</sub> (Note 4)  | Quiescent Supply Current                                                                                   | V <sub>I</sub> = V <sub>CCI</sub> or GND; I <sub>O</sub> = 0 | 1.1 - 3.6               | 1.1 - 3.6               |     | 20.0                   | μA    |
| I <sub>CCZ</sub> (Note 5)   | Quiescent Supply Current                                                                                   | V <sub>I</sub> = V <sub>CCI</sub> or GND; I <sub>O</sub> = 0 | 1.1 - 3.6               | 1.1 - 3.6               |     | 20.0                   | μA    |
| I <sub>CCI</sub>            | Quiescent Supply Current                                                                                   | V <sub>I</sub> = V <sub>CCI</sub> or GND; I <sub>O</sub> = 0 | 0                       | 1.1 - 3.6               |     | -10.0                  | μA    |
|                             |                                                                                                            | V <sub>I</sub> = V <sub>CCI</sub> or GND; I <sub>O</sub> = 0 | 1.1 - 3.6               | 0                       |     | 10.0                   |       |
| I <sub>CCO</sub>            | Quiescent Supply Current                                                                                   | V <sub>I</sub> = V <sub>CCO</sub> or GND; I <sub>O</sub> = 0 | 1.1 - 3.6               | 0                       |     | -10.0                  | μA    |
|                             |                                                                                                            | V <sub>I</sub> = V <sub>CCO</sub> or GND; I <sub>O</sub> = 0 | 0                       | 1.1 - 3.6               |     | 10.0                   |       |
| ΔI <sub>CCI/O</sub>         | Increase in I <sub>CC</sub> per Input;<br>Other Inputs at V <sub>CC</sub> or GND                           | V <sub>IH</sub> = 3.0                                        | 3.6                     | 3.6                     |     | 500                    | μA    |

**Note 4:** Don't Care = Any valid logic level.

**Note 5:** Reflects current per supply, V<sub>CCI</sub> or V<sub>CCO</sub>.

**AC Electrical Characteristics**  $V_{CCI} = 3.0V$  to  $3.6V$ 

| Symbol                              | Parameter                           | T <sub>A</sub> = -40°C to +85°C    |     |                                    |     |                                      |     |                                    |     |                                    |      | Units |
|-------------------------------------|-------------------------------------|------------------------------------|-----|------------------------------------|-----|--------------------------------------|-----|------------------------------------|-----|------------------------------------|------|-------|
|                                     |                                     | V <sub>CCO</sub> =<br>3.0V to 3.6V |     | V <sub>CCO</sub> =<br>2.3V to 2.7V |     | V <sub>CCO</sub> =<br>1.65V to 1.95V |     | V <sub>CCO</sub> =<br>1.4V to 1.6V |     | V <sub>CCO</sub> =<br>1.1V to 1.3V |      |       |
|                                     |                                     | Min                                | Max | Min                                | Max | Min                                  | Max | Min                                | Max | Min                                | Max  |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to Y            | 0.2                                | 3.5 | 0.3                                | 3.9 | 0.7                                  | 5.4 | 0.8                                | 6.8 | 1.4                                | 22.0 | ns    |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable $\overline{OE}$ to Y  | 0.5                                | 4.0 | 0.7                                | 4.4 | 1.0                                  | 5.9 | 1.0                                | 6.4 | 1.5                                | 17.0 | ns    |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable $\overline{OE}$ to Y | 0.2                                | 3.8 | 0.2                                | 4.0 | 0.7                                  | 4.8 | 1.5                                | 6.2 | 2.0                                | 17.0 | ns    |

**AC Electrical Characteristics**  $V_{CCI} = 2.3V$  to  $2.7V$ 

| Symbol                              | Parameter                           | T <sub>A</sub> = -40°C to +85°C    |     |                                    |     |                                      |     |                                    |     |                                    |      | Units |
|-------------------------------------|-------------------------------------|------------------------------------|-----|------------------------------------|-----|--------------------------------------|-----|------------------------------------|-----|------------------------------------|------|-------|
|                                     |                                     | V <sub>CCO</sub> =<br>3.0V to 3.6V |     | V <sub>CCO</sub> =<br>2.3V to 2.7V |     | V <sub>CCO</sub> =<br>1.65V to 1.95V |     | V <sub>CCO</sub> =<br>1.4V to 1.6V |     | V <sub>CCO</sub> =<br>1.1V to 1.3V |      |       |
|                                     |                                     | Min                                | Max | Min                                | Max | Min                                  | Max | Min                                | Max | Min                                | Max  |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to Y            | 0.2                                | 3.8 | 0.4                                | 4.2 | 0.5                                  | 5.6 | 0.8                                | 6.9 | 1.4                                | 22.0 | ns    |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable $\overline{OE}$ to Y  | 0.6                                | 4.2 | 0.8                                | 4.6 | 1.0                                  | 6.0 | 1.0                                | 6.8 | 1.5                                | 17.0 | ns    |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable $\overline{OE}$ to Y | 0.2                                | 4.1 | 0.2                                | 4.3 | 0.7                                  | 4.8 | 1.5                                | 6.7 | 2.0                                | 17.0 | ns    |

**AC Electrical Characteristics**  $V_{CCI} = 1.65V$  to  $1.95V$ 

| Symbol                              | Parameter                           | T <sub>A</sub> = -40°C to +85°C    |     |                                    |     |                                      |     |                                    |     |                                    |      | Units |
|-------------------------------------|-------------------------------------|------------------------------------|-----|------------------------------------|-----|--------------------------------------|-----|------------------------------------|-----|------------------------------------|------|-------|
|                                     |                                     | V <sub>CCO</sub> =<br>3.0V to 3.6V |     | V <sub>CCO</sub> =<br>2.3V to 2.7V |     | V <sub>CCO</sub> =<br>1.65V to 1.95V |     | V <sub>CCO</sub> =<br>1.4V to 1.6V |     | V <sub>CCO</sub> =<br>1.1V to 1.3V |      |       |
|                                     |                                     | Min                                | Max | Min                                | Max | Min                                  | Max | Min                                | Max | Min                                | Max  |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to Y            | 0.3                                | 4.0 | 0.5                                | 4.5 | 0.8                                  | 5.7 | 0.9                                | 7.1 | 1.5                                | 22.0 | ns    |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable $\overline{OE}$ to Y  | 0.6                                | 5.2 | 0.8                                | 5.4 | 1.2                                  | 6.9 | 1.2                                | 7.2 | 1.5                                | 18.0 | ns    |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable $\overline{OE}$ to Y | 0.2                                | 5.1 | 0.2                                | 4.0 | 0.8                                  | 5.2 | 1.5                                | 7.0 | 2.0                                | 17.0 | ns    |

**AC Electrical Characteristics**  $V_{CCI} = 1.4V$  to  $1.6V$ 

| Symbol                              | Parameter                           | T <sub>A</sub> = -40°C to +85°C    |     |                                    |     |                                      |     |                                    |     |                                    |      | Units |
|-------------------------------------|-------------------------------------|------------------------------------|-----|------------------------------------|-----|--------------------------------------|-----|------------------------------------|-----|------------------------------------|------|-------|
|                                     |                                     | V <sub>CCO</sub> =<br>3.0V to 3.6V |     | V <sub>CCO</sub> =<br>2.3V to 2.7V |     | V <sub>CCO</sub> =<br>1.65V to 1.95V |     | V <sub>CCO</sub> =<br>1.4V to 1.6V |     | V <sub>CCO</sub> =<br>1.1V to 1.3V |      |       |
|                                     |                                     | Min                                | Max | Min                                | Max | Min                                  | Max | Min                                | Max | Min                                | Max  |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to Y            | 0.5                                | 4.3 | 0.5                                | 4.8 | 1.0                                  | 6.0 | 1.0                                | 7.3 | 1.5                                | 22.0 | ns    |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable $\overline{OE}$ to Y  | 1.1                                | 7.5 | 1.1                                | 7.6 | 1.3                                  | 7.7 | 1.4                                | 7.9 | 2.0                                | 20.0 | ns    |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable $\overline{OE}$ to Y | 0.4                                | 6.1 | 0.4                                | 6.2 | 0.9                                  | 6.2 | 1.5                                | 7.5 | 2.0                                | 18.0 | ns    |


**AC Electrical Characteristics**  $V_{CCI} = 1.1V$  to  $1.3V$ 

| Symbol                              | Parameter                           | T <sub>A</sub> = −40°C to +85°C    |      |                                    |     |                                      |      |                                    |      |                                    |      | Units |
|-------------------------------------|-------------------------------------|------------------------------------|------|------------------------------------|-----|--------------------------------------|------|------------------------------------|------|------------------------------------|------|-------|
|                                     |                                     | V <sub>CCO</sub> =<br>3.0V to 3.6V |      | V <sub>CCO</sub> =<br>2.3V to 2.7V |     | V <sub>CCO</sub> =<br>1.65V to 1.95V |      | V <sub>CCO</sub> =<br>1.4V to 1.6V |      | V <sub>CCO</sub> =<br>1.1V to 1.3V |      |       |
|                                     |                                     | Min                                | Max  | Min                                | Max | Min                                  | Max  | Min                                | Max  | Min                                | Max  |       |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay A to Y            | 0.8                                | 13.0 | 1.0                                | 7.0 | 1.2                                  | 8.0  | 1.3                                | 9.5  | 2.0                                | 24.0 | ns    |
| t <sub>PZH</sub> , t <sub>PZL</sub> | Output Enable $\overline{OE}$ to Y  | 1.0                                | 12.0 | 1.0                                | 9.0 | 2.0                                  | 10.0 | 2.0                                | 11.0 | 2.0                                | 24.0 | ns    |
| t <sub>PHZ</sub> , t <sub>PLZ</sub> | Output Disable $\overline{OE}$ to Y | 1.0                                | 15.0 | 0.7                                | 7.0 | 1.0                                  | 8.0  | 2.0                                | 10.0 | 2.0                                | 20.0 | ns    |

**Capacitance**

| Symbol    | Parameter                                               | Conditions                                                    | $T_A = +25^{\circ}C$ | Units |
|-----------|---------------------------------------------------------|---------------------------------------------------------------|----------------------|-------|
|           |                                                         |                                                               | Typical              |       |
| $C_{IN}$  | Input Capacitance $A_n$ Control Pin ( $\overline{OE}$ ) | $V_{CCI} = V_{CCO} = 3.3V, V_I = 0V$ or $V_{CCI}$             | 4.0                  | pF    |
| $C_{OUT}$ | Output Capacitance $Y_n$                                | $V_{CCI} = V_{CCO} = 3.3V, V_I = 0V$ or $V_{CCI}$             | 5.0                  | pF    |
| $C_{PD}$  | Power Dissipation Capacitance                           | $V_{CCI} = V_{CCO} = 3.3V, V_I = 0V$ or $V_{CCI}, F = 10$ MHz | 20.0                 | pF    |

## AC Loading and Waveforms

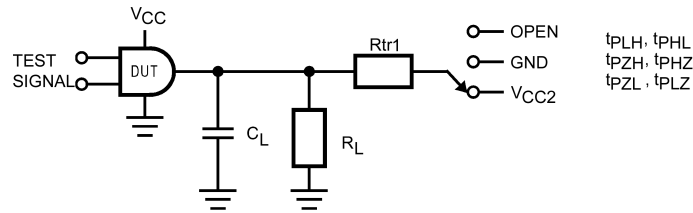


| TEST                  | SWITCH                                                                                                                  |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------|
| $t_{PLH}$ , $t_{PHL}$ | OPEN                                                                                                                    |
| $t_{PLZ}$ , $t_{PZL}$ | $V_{CCO} \times 2$ at $V_{CCO} = 3.3 \pm 0.3V$ , $2.5V \pm 0.2V$ , $1.8V \pm 0.15V$ , $1.5V \pm 0.1V$ , $1.2V \pm 0.1V$ |
| $t_{PHZ}$ , $t_{PZH}$ | GND                                                                                                                     |

FIGURE 1. AC Test Circuit

AC Load Table


| $V_{CCO}$        | $C_L$ | $R_L$        | $R_{tr1}$    |
|------------------|-------|--------------|--------------|
| $1.2V \pm 0.1V$  | 15 pF | 2 k $\Omega$ | 2 k $\Omega$ |
| $1.5V \pm 0.1V$  | 15 pF | 2 k $\Omega$ | 2 k $\Omega$ |
| $1.8V \pm 0.15V$ | 15 pF | 2 k $\Omega$ | 2 k $\Omega$ |
| $2.5V \pm 0.2V$  | 15 pF | 2 k $\Omega$ | 2 k $\Omega$ |
| $3.3V \pm 0.3V$  | 15 pF | 2 k $\Omega$ | 2 k $\Omega$ |

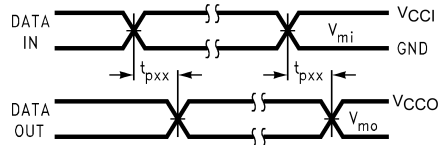

Note: Input  $t_R = t_F = 2.0$  ns, 10% to 90%

Input  $t_R = t_F = 2.5$  ns, 10% to 90%, @  $V_I = 3.0V$  to  $3.6V$  only


FIGURE 2. Waveform for Inverting and Non-Inverting Functions

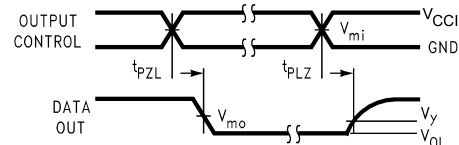

Note: Input  $t_R = t_F = 2.0$  ns, 10% to 90%

Input  $t_R = t_F = 2.5$  ns, 10% to 90%, @  $V_I = 3.0V$  to  $3.6V$  only

FIGURE 3. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

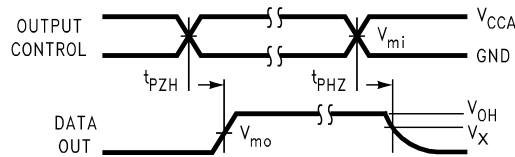

Note: Input  $t_R = t_F = 2.0$  ns, 10% to 90%

Input  $t_R = t_F = 2.5$  ns, 10% to 90%, @  $V_I = 3.0V$  to  $3.6V$  only

FIGURE 4. 3-STATE Output High Enable and Disable Times for Low Voltage Logic

| Symbol   | $V_{CC}$        |                  |                  |                 |                 |
|----------|-----------------|------------------|------------------|-----------------|-----------------|
|          | $3.3V \pm 0.3V$ | $2.5V \pm 0.2V$  | $1.8V \pm 0.15V$ | $1.5V \pm 0.1V$ | $1.2V \pm 0.1V$ |
| $V_{mi}$ | $V_{CCI}/2$     | $V_{CCI}/2$      | $V_{CCI}/2$      | $V_{CCI}/2$     | $V_{CCI}/2$     |
| $V_{mo}$ | $V_{CCO}/2$     | $V_{CCO}/2$      | $V_{CCO}/2$      | $V_{CCO}/2$     | $V_{CCO}/2$     |
| $V_X$    | $V_{OH} - 0.3V$ | $V_{OH} - 0.15V$ | $V_{OH} - 0.15V$ | $V_{OH} - 0.1V$ | $V_{OH} - 0.1V$ |
| $V_Y$    | $V_{OL} + 0.3V$ | $V_{OL} + 0.15V$ | $V_{OL} + 0.15V$ | $V_{OL} + 0.1V$ | $V_{OL} + 0.1V$ |


Note: For  $V_{mi}$ :  $V_{CCI} = V_{CCA}$  for Control Pins  $T/\bar{R}$  and  $OE$ , or  $V_{CCA}/2$

## Tape and Reel Specification

### Tape Format for DQFN

| Package Designator | Tape Section       | Number Cavities | Cavity Status | Cover Tape Status |
|--------------------|--------------------|-----------------|---------------|-------------------|
| BQX                | Leader (Start End) | 125 (typ)       | Empty         | Sealed            |
|                    | Carrier            | 3000            | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (typ)        | Empty         | Sealed            |

### TAPE DIMENSIONS inches (millimeters)

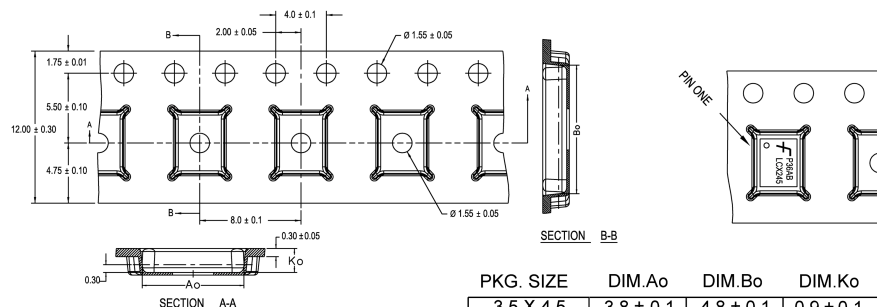


| PKG. SIZE | DIM.Ao    | DIM.Bo    | DIM.Ko    |
|-----------|-----------|-----------|-----------|
| 3.5 X 4.5 | 3.8 ± 0.1 | 4.8 ± 0.1 | 0.9 ± 0.1 |
| 3.0 X 3.0 | 3.3 ± 0.1 | 3.3 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 4.5 | 2.8 ± 0.1 | 4.8 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 3.5 | 2.8 ± 0.1 | 3.8 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 3.0 | 2.8 ± 0.1 | 3.3 ± 0.1 | 0.9 ± 0.1 |
| 2.5 X 2.5 | 2.8 ± 0.1 | 2.8 ± 0.1 | 0.9 ± 0.1 |

DIMENSIONS ARE IN MILLIMETERS

NOTES: unless otherwise specified


1. Cumulative pitch for feeding holes and cavities (chip pockets) not to exceed 0.008[0.20] over 10 pitch span.
2. Smallest allowable bending radius.
3. Thru hole inside cavity is centered within cavity.
4. Tolerance is ±0.002[0.05] for these dimensions on all 12mm tapes.
5. A<sub>o</sub> and B<sub>o</sub> measured on a plane 0.120[0.30] above the bottom of the pocket.
6. K<sub>o</sub> measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
7. Pocket position relative to sprocket hole measured as true position of pocket. Not pocket hole.
8. Controlling dimension is millimeter. Dimension in inches rounded.

### REEL DIMENSIONS inches (millimeters)

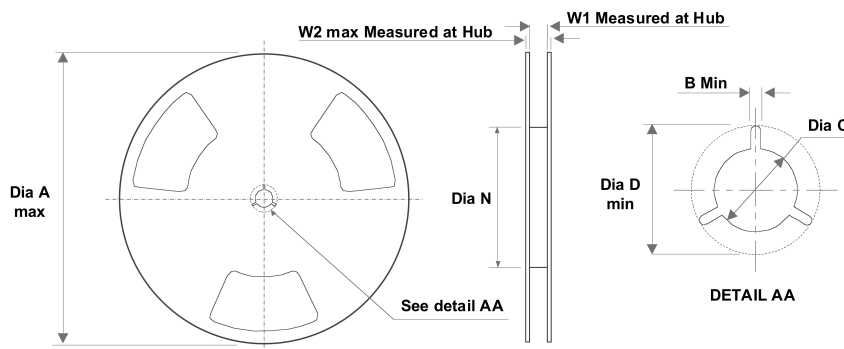

| Tape Size | A               | B               | C                | D                | N                | W1              | W2              |
|-----------|-----------------|-----------------|------------------|------------------|------------------|-----------------|-----------------|
| 12 mm     | 13.0<br>(330.0) | 0.059<br>(1.50) | 0.512<br>(13.00) | 0.795<br>(20.20) | 2.165<br>(55.00) | 0.488<br>(12.4) | 0.724<br>(18.4) |

## Physical Dimensions inches (millimeters) unless otherwise noted

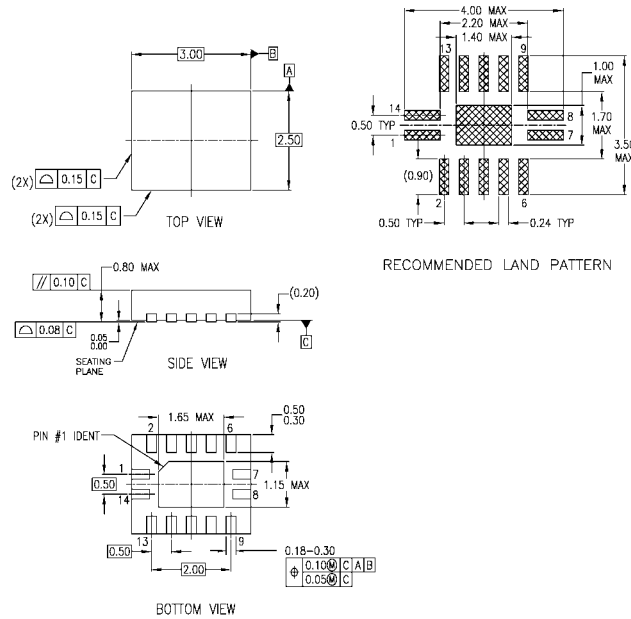

### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-241, VARIATION AA
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994

MLP014ArevA

**14-Terminal Depopulated Quad Very-Thin Flat Pack No Leads (DQFN), JEDEC MO-241, 2.5 x 3.0mm  
Package Number MLP014A**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)