

Small Signal Product

Bi-directional ESD Protection Diode


FEATURES

- Meet IEC61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- Designed for mounting on small surface
- Protects one Bi-directional I/O line
- Moisture sensitivity level 1
- Working Voltage : 5V, 12V, 24V
- Pb free version and RoHS compliant
- Packing code with suffix "G" means green compound (halogen-free)


0503


MECHANICAL DATA

- Case: 0503 small outline plastic package
- Terminal : Gold plated, solder per MIL-STD-705, method 2026 guaranteed
- High temperature soldering guaranteed : $260^{\circ}\text{C}/10\text{s}$
- Weight: $2 \pm 0.5 \text{ mg}$



APPLICATIONS

- Cell Phone Handsets and Accessories
- Notebooks, Desktops, and Servers
- Keypads, Side Keys, USB 2.0, LCD Displays
- Portable Instrumentation
- Touch Panel






MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Peak Pulse Power (tp=8/20μs waveform)	TESDE5V0	P _{PP}	75	W
	TESDE12V		25	
	TESDE24V		47	
ESD per IEC 61000-4-2 (Air)		V _{ESD}	± 15	KV
ESD per IEC 61000-4-2 (Contact)			± 8	
Junction and Storage Temperature Range		T _J , T _{STG}	-55 to +150	°C

PARAMETER			SYMBOL	MIN	MAX	UNIT
Reverse Stand-Off Voltage	TESDE5V0		V_{RWM}	-	5	V
	TESDE12V			-	12	
	TESDE24V			-	24	
Reverse Breakdown Voltage	TESDE5V0	$I_R = 1\text{ mA}$	$V_{(BR)}$	5.1	-	V
	TESDE12V			13	-	
	TESDE24V			25	-	
Reverse Leakage Current	TESDE5V0	$V_R = 5\text{ V}$	I_R	-	2	μA
	TESDE12V	$V_R = 12\text{ V}$				
	TESDE24V	$V_R = 24\text{ V}$				
Clamping Voltage	TESDE5V0	$I_{PP} = 1\text{ A}$	V_C	-	9.8	V
		$I_{PP} = 5\text{ A}$		-	15	
Clamping Voltage	TESDE12V	$I_{PP} = 1\text{ A}$	V_C	-	25	V
		$I_{PP} = 5\text{ A}$		-	33	
Clamping Voltage	TESDE24V	$I_{PP} = 1\text{ A}$	V_C	-	47	V
		$I_{PP} = 5\text{ A}$		-	51	
Junction Capacitance	TESDE5V0	$V_R = 0\text{ V}$	C_J	15		pF
	TESDE12V	$f = 1.0\text{ MHz}$		12		
	TESDE24V			10		

Small Signal Product


RATINGS AND CHARACTERISTICS CURVES

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

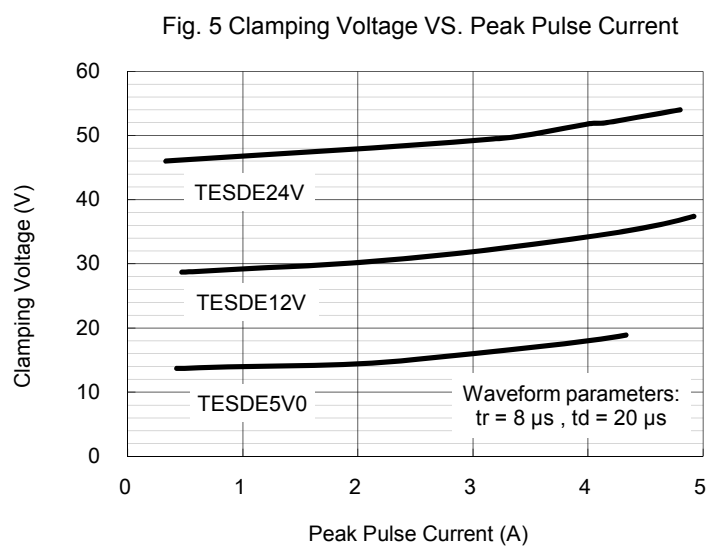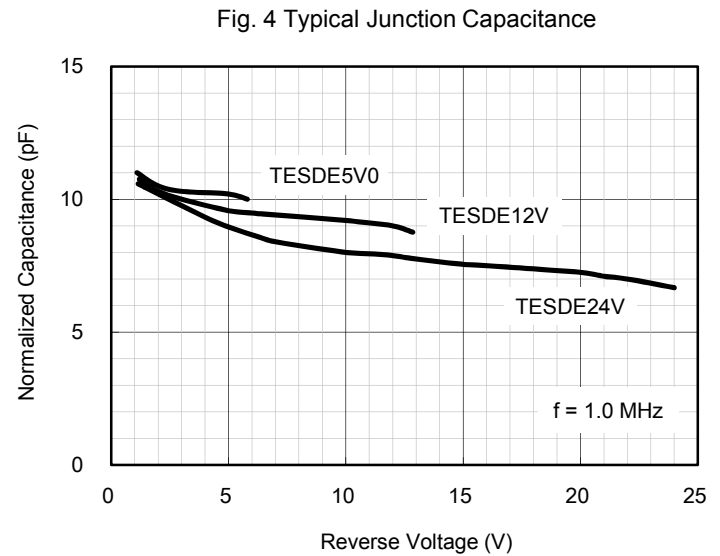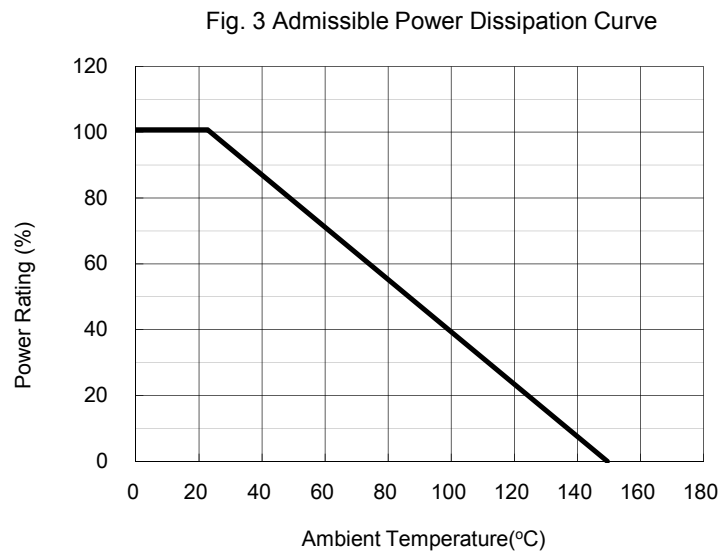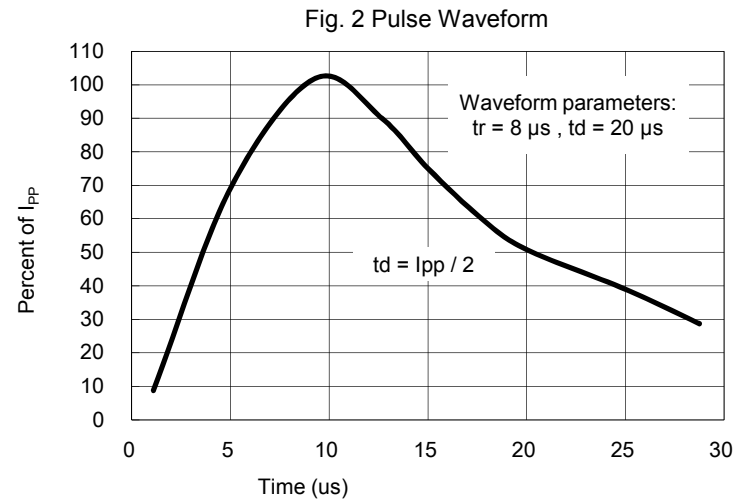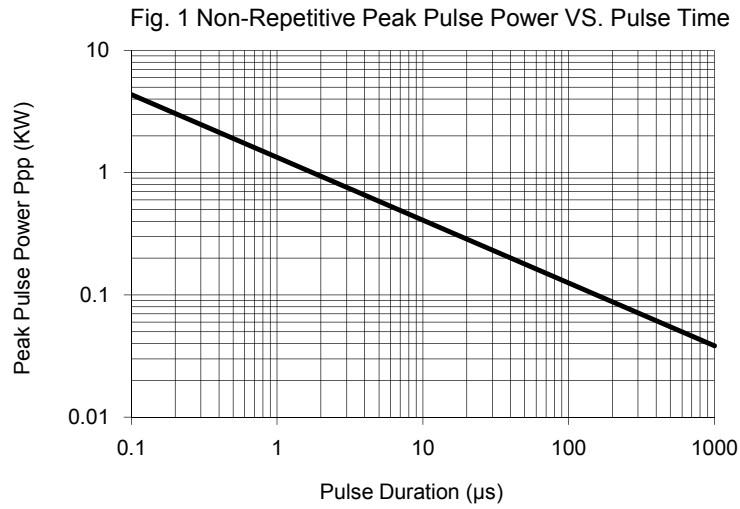


Small Signal Product

ORDER INFORMATION (EXAMPLE)

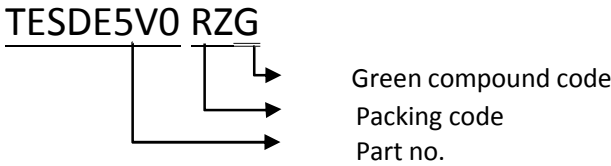


PACKAGE OUTLINE DIMENSIONS
0503

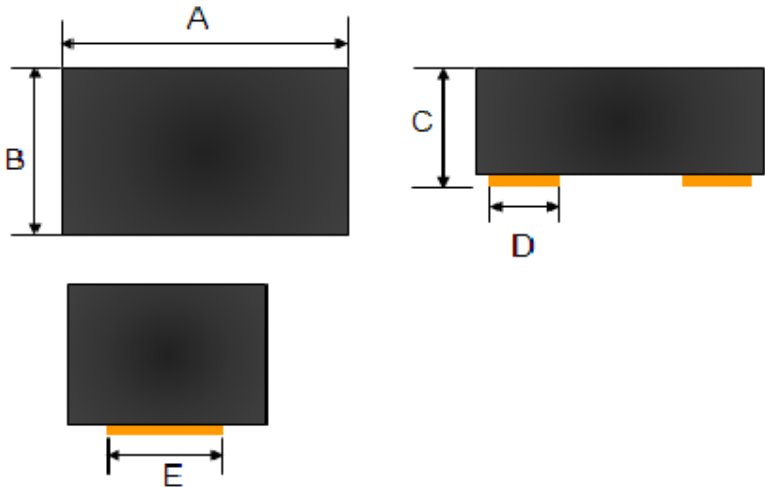

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.15	1.35	0.045	0.053
B	0.65	0.85	0.026	0.033
C	0.60	0.75	0.024	0.030
D	0.40 (Typ.)		0.016 (Typ.)	
E	0.55 (Typ.)		0.022 (Typ.)	

SUGGEST PAD LAYOUT

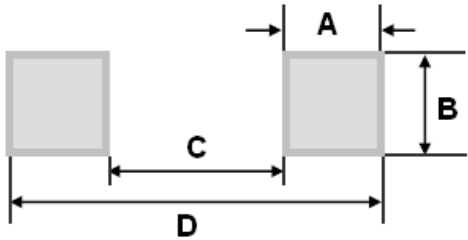

DIM.	Unit (mm)	Unit (inch)
	Typ.	Typ.
A	0.55	0.022
B	0.85	0.033
C	0.30	0.012
D	1.40	0.055

Note: The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application.

MARKING

Part NO.	Marking
TESDE5V0	E05
TESDE12V	E12
TESDE24V	E24

Small Signal Product

APPLICATION INFORMATION

- Designed to protect one data, I/O, or power supply line
- Designed to protect sensitive electronics from damage or latch-up due to ESD
- Designed to replace multilayer varistors (MLVs) in portable applications
- Features large cross-sectional area junctions for conducting high transient currents
- Offers superior electrical characteristics such as lower clamping voltage and no device degradation when compared to MLVs
- The combination of small size and high ESD surge capability makes them ideal for use in portable applications

CIRCUIT BOARD LAYOUT RECOMMENDATIONS

- Good circuit board layout is critical for the suppression of ESD induced transients
- Place the ESD Protection Diode near the input terminals or connectors to restrict transient coupling
- Minimize the path length between the ESD Protection Diode and the protected line
- Minimize all conductive loops including power and ground loops
- The ESD transient return path to ground should be kept as short as possible
- Never run critical signals near board edges
- Use ground planes whenever possible

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.