


- Threaded barrel, M30 x 1.5
- Chrome-plated brass
- Factor 1 for all metals
- Protection class IP68
- Magnetic field immune
- High switching distance
- Integrated predamping protection
- Limited metal-free spaces
- DC 4-wire, 10...55 VDC
- Changeover contact, PNP output
- M12 x 1 connector

Wiring diagram

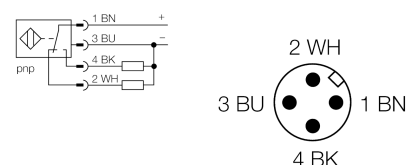

Functional principle

Inductive sensors detect metal objects contactless and wear-free. Due to a patented ferrite-less air-coil systems, *Uprox®* sensors have distinct advantages compared to conventional sensors. They excel in highest switching distances, maximum flexibility and operational reliability as well as efficient standardization.


Type	NI30U-M30-VP44X-H1141
Ident-No.	1634887
Rated operating distance Sn	30 mm
Mounting condition	non-flush
Assured sensing range	$\leq (0,81 \times S_n)$ mm
Repeatability	$\leq 2 \%$
Temperature drift	$\leq \pm 10 \%$
Hysteresis	$\leq \pm 15 \%$, $\leq -25 \text{ °C}$ v $\geq +70 \text{ °C}$
Ambient temperature	3...15 % -30...+85 °C
Operating voltage	10...55 VDC
Residual ripple	$\leq 10 \% U_{SS}$
DC rated operational current	$\leq 200 \text{ mA}$
No-load current I_0	$\leq 20 \text{ mA}$
Residual current	$\leq 0,1 \text{ mA}$
Rated insulation voltage	$\leq 0,5 \text{ kV}$
Short-circuit protection	yes/ cyclic
Voltage drop at I_e	$\leq 1,8 \text{ V}$
Wire breakage / Reverse polarity protection	yes/ complete
Output function	4-wire, changover contact, PNP
Protection class	IP68
Switching frequency	$\leq 1 \text{ kHz}$
Design	threaded barrel, M30 x 1.5
Dimensions	62 mm
Housing material	Metal, CuZn, chrome-plated
Material active face	Plastic, LCP-GF30
Tightening torque of housing nut	75 Nm
Connection	connector, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
Switching state	LED yellow

Mounting instructions

	minimum distances
Distance D	135 mm
Distance W	90 mm
Distance T	90 mm
Distance S	45 mm
Distance G	180 mm
Distance N	30 mm

Diameter of the active area B

Ø 30 mm

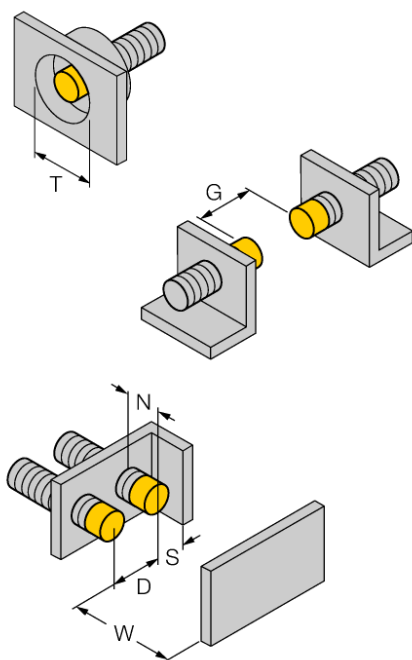

All non-flush mountable *uprox[®]+* threaded barrel sensors can be screwed to the upper edge of the barrel. Thus safe operation is guaranteed with a reduced switching distance of max. 20 %.

When installed in an aperture plate a distance of X = 140 mm must be observed.

Accessories


Type code	Ident-No.	Short text	Dimension drawing
BST-30B	6947216	Fixing clamp for threaded barrel devices, with dead-stop; material: PA6	
QM-30	6945103	Quick-mount bracket with dead-stop; material: Chrome-plated brass Male thread M36 x 1.5. Note: The switching distance of proximity switches can be reduced by the use of quick-mount brackets.	
MW-30	6945005	Mounting bracket for threaded barrel devices; material: Stainless steel A2 1.4301 (AISI 304)	
BSS-30	6901319	Mounting bracket for smooth and threaded barrel devices; material: Polypropylene	

MINIMUM DISTANCES BETWEEN NON-FLUSH SENSORS


uprox®+

www.turck.com

Approved Minimum Distances for non-flush sensors **uprox®+**




Connector
orientation

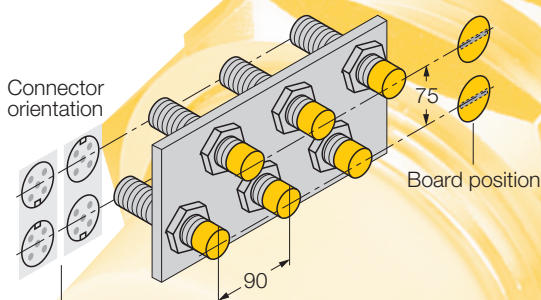


The guide bars have to be directed opposed
or towards each other!

Position under high interference

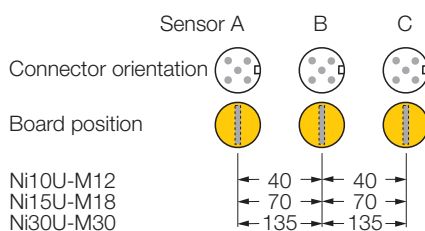

Position under low interference

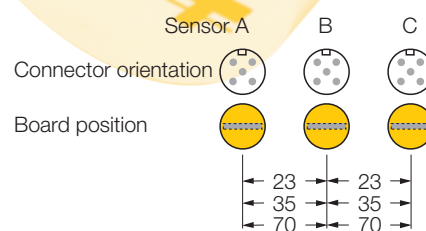

All dimensions in mm.

Hans Turck GmbH & Co. KG
Witzlebenstraße 7
45472 Mülheim an der Ruhr,
Germany
Tel. +49 (0) 2 08 49 52-0,
Fax +49 (0) 2 08 49 52-2 64
E-Mail more@turck.com
Internet www.turck.com