
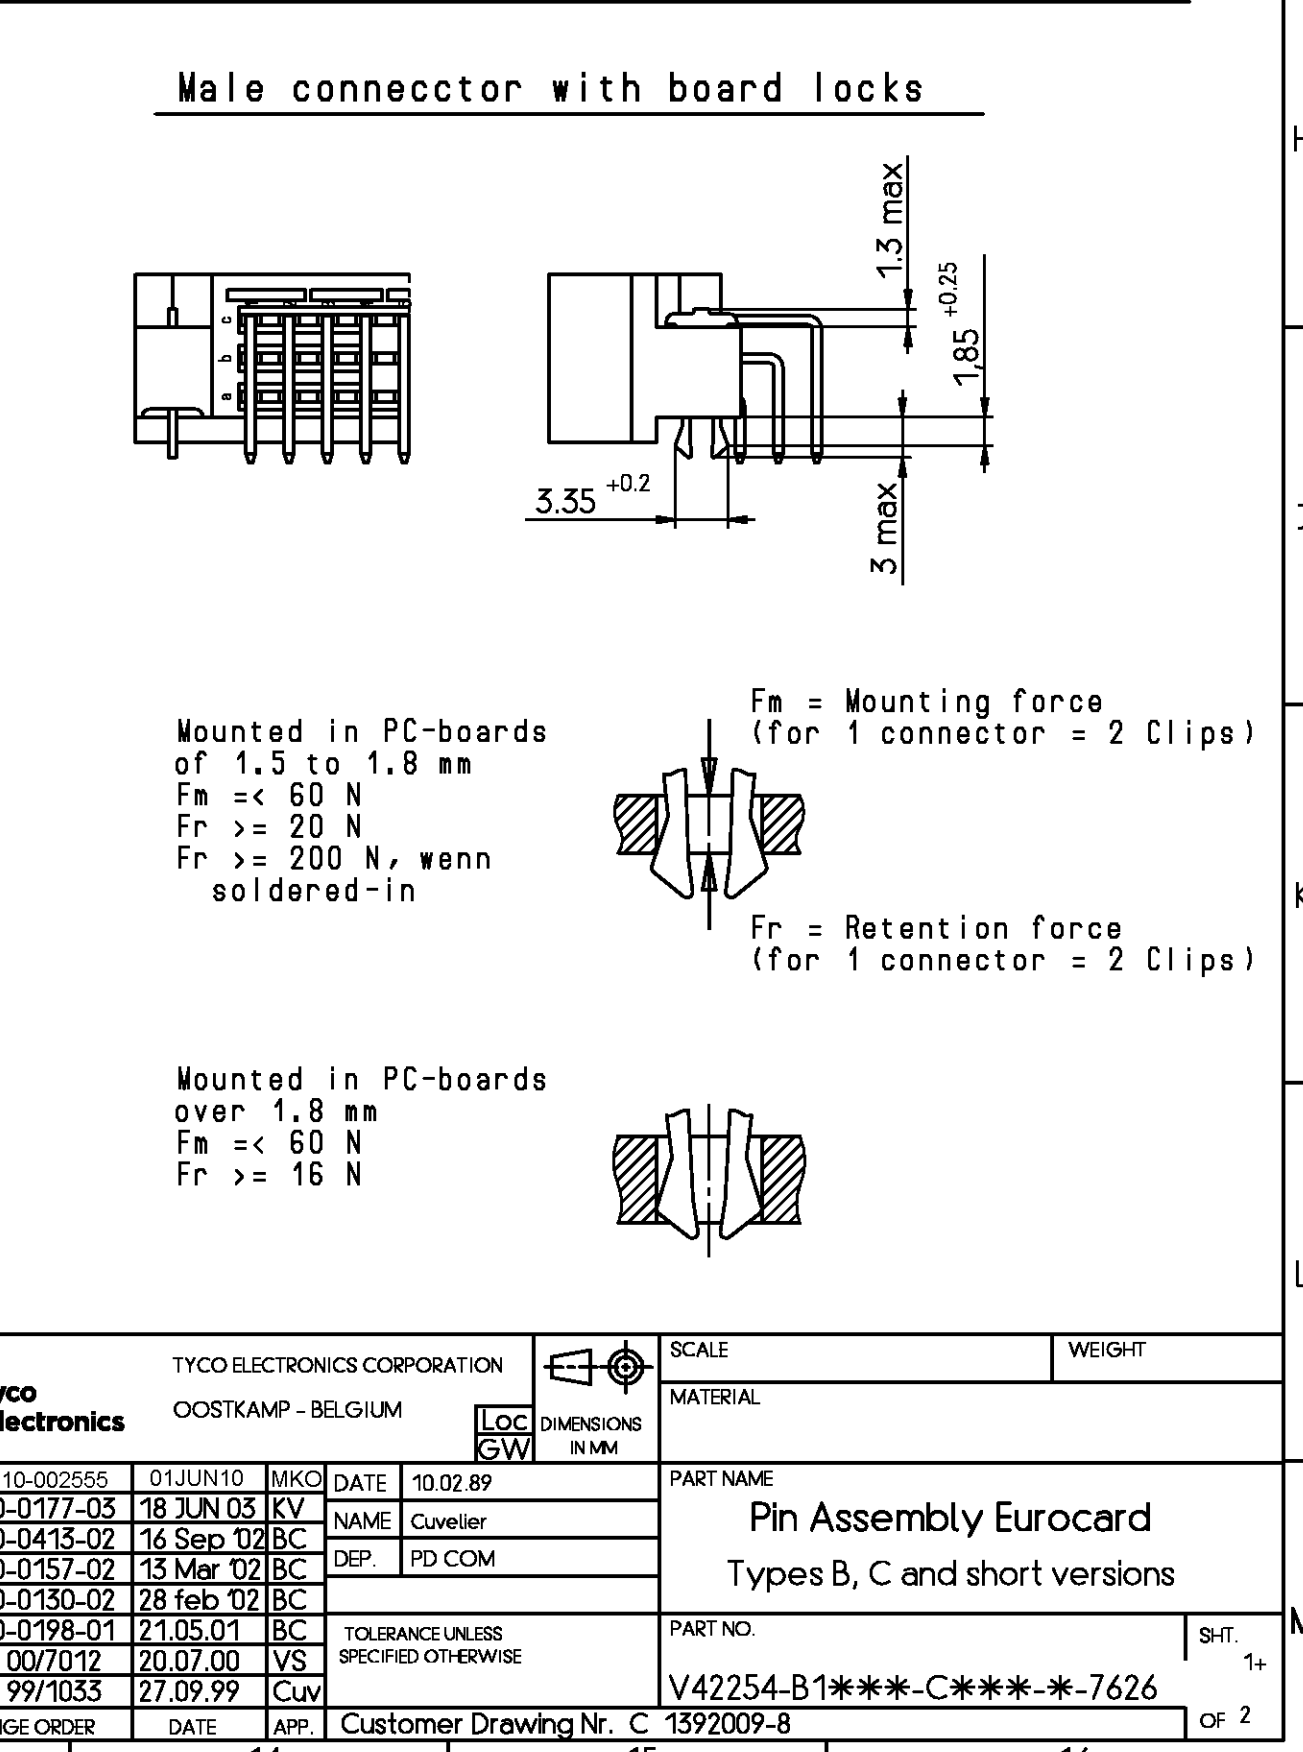
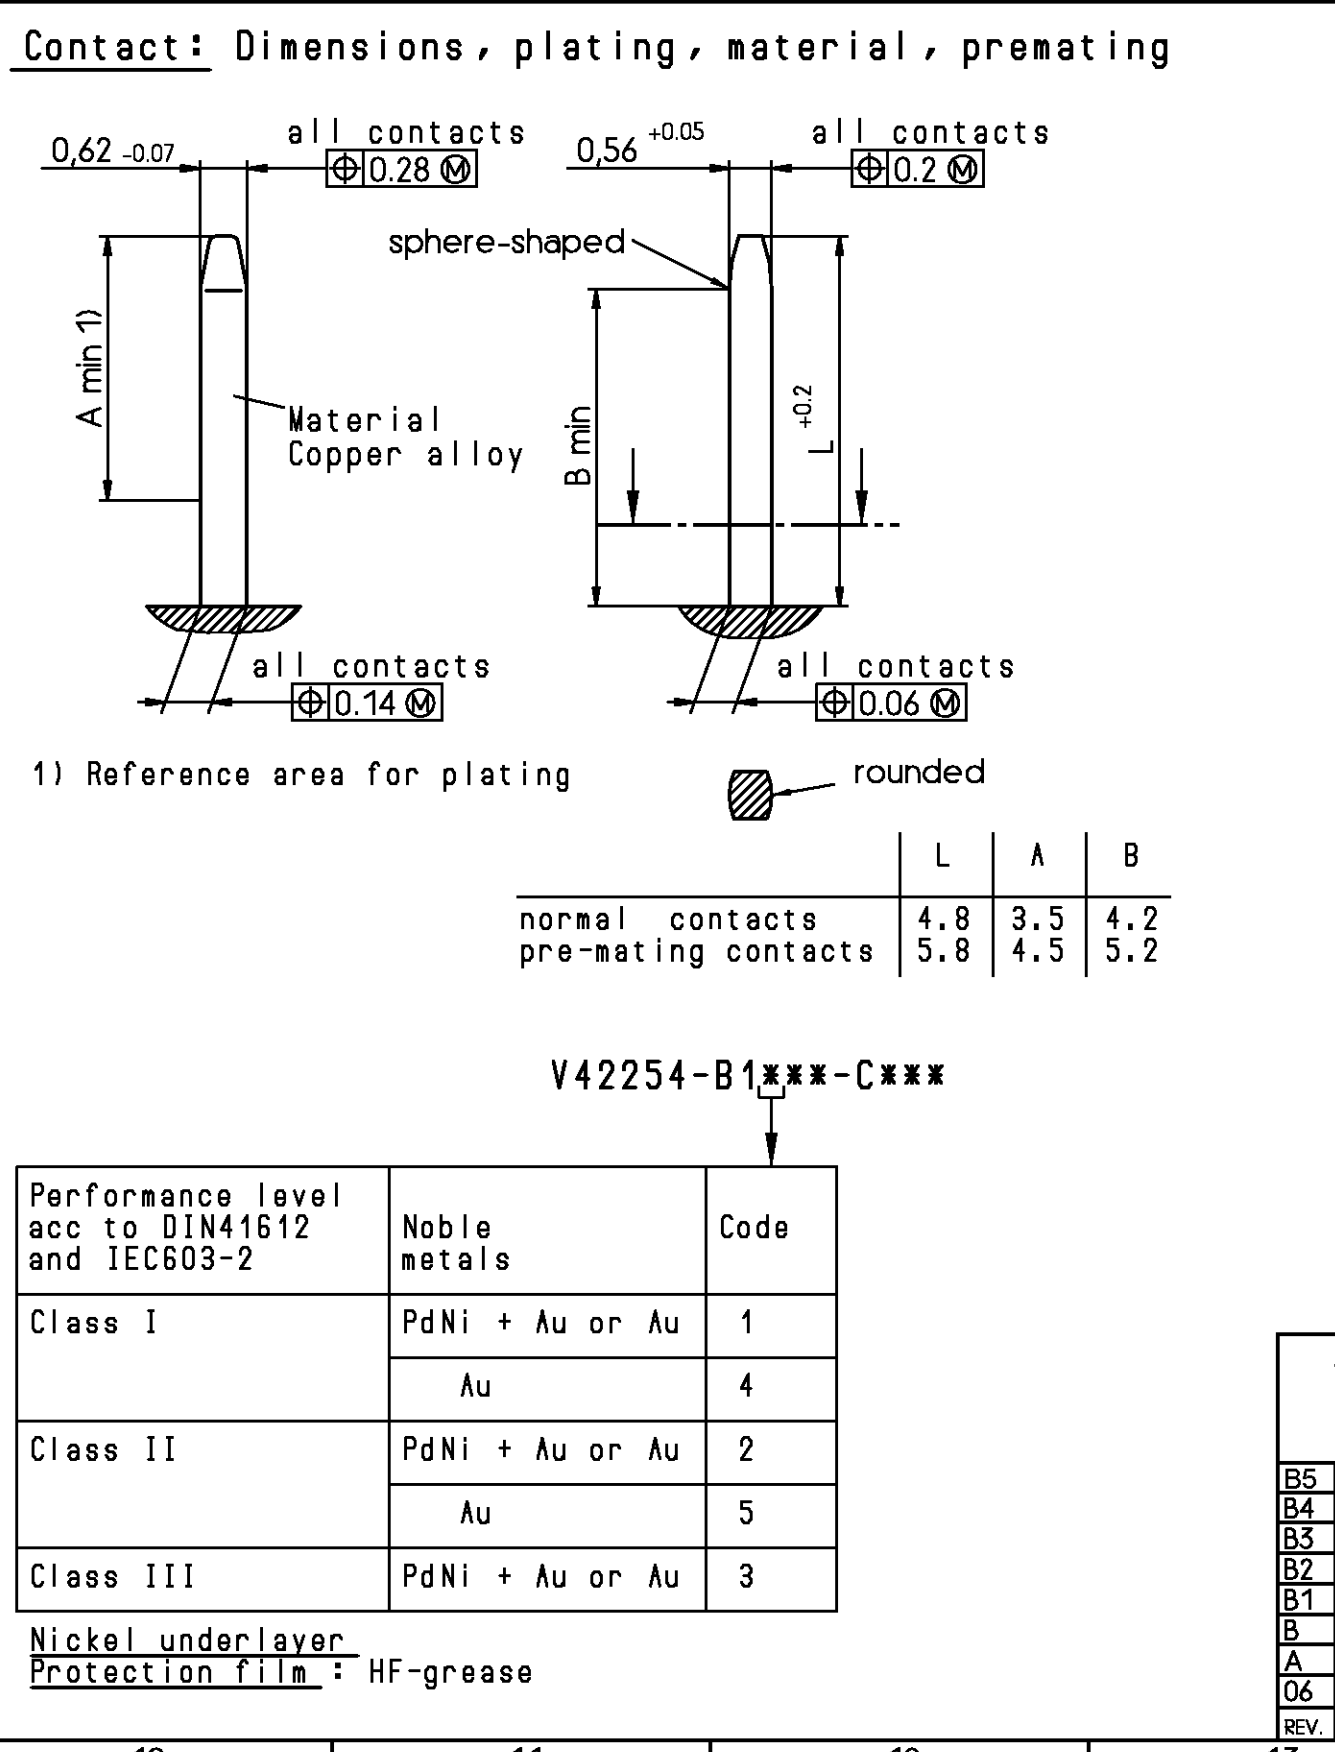
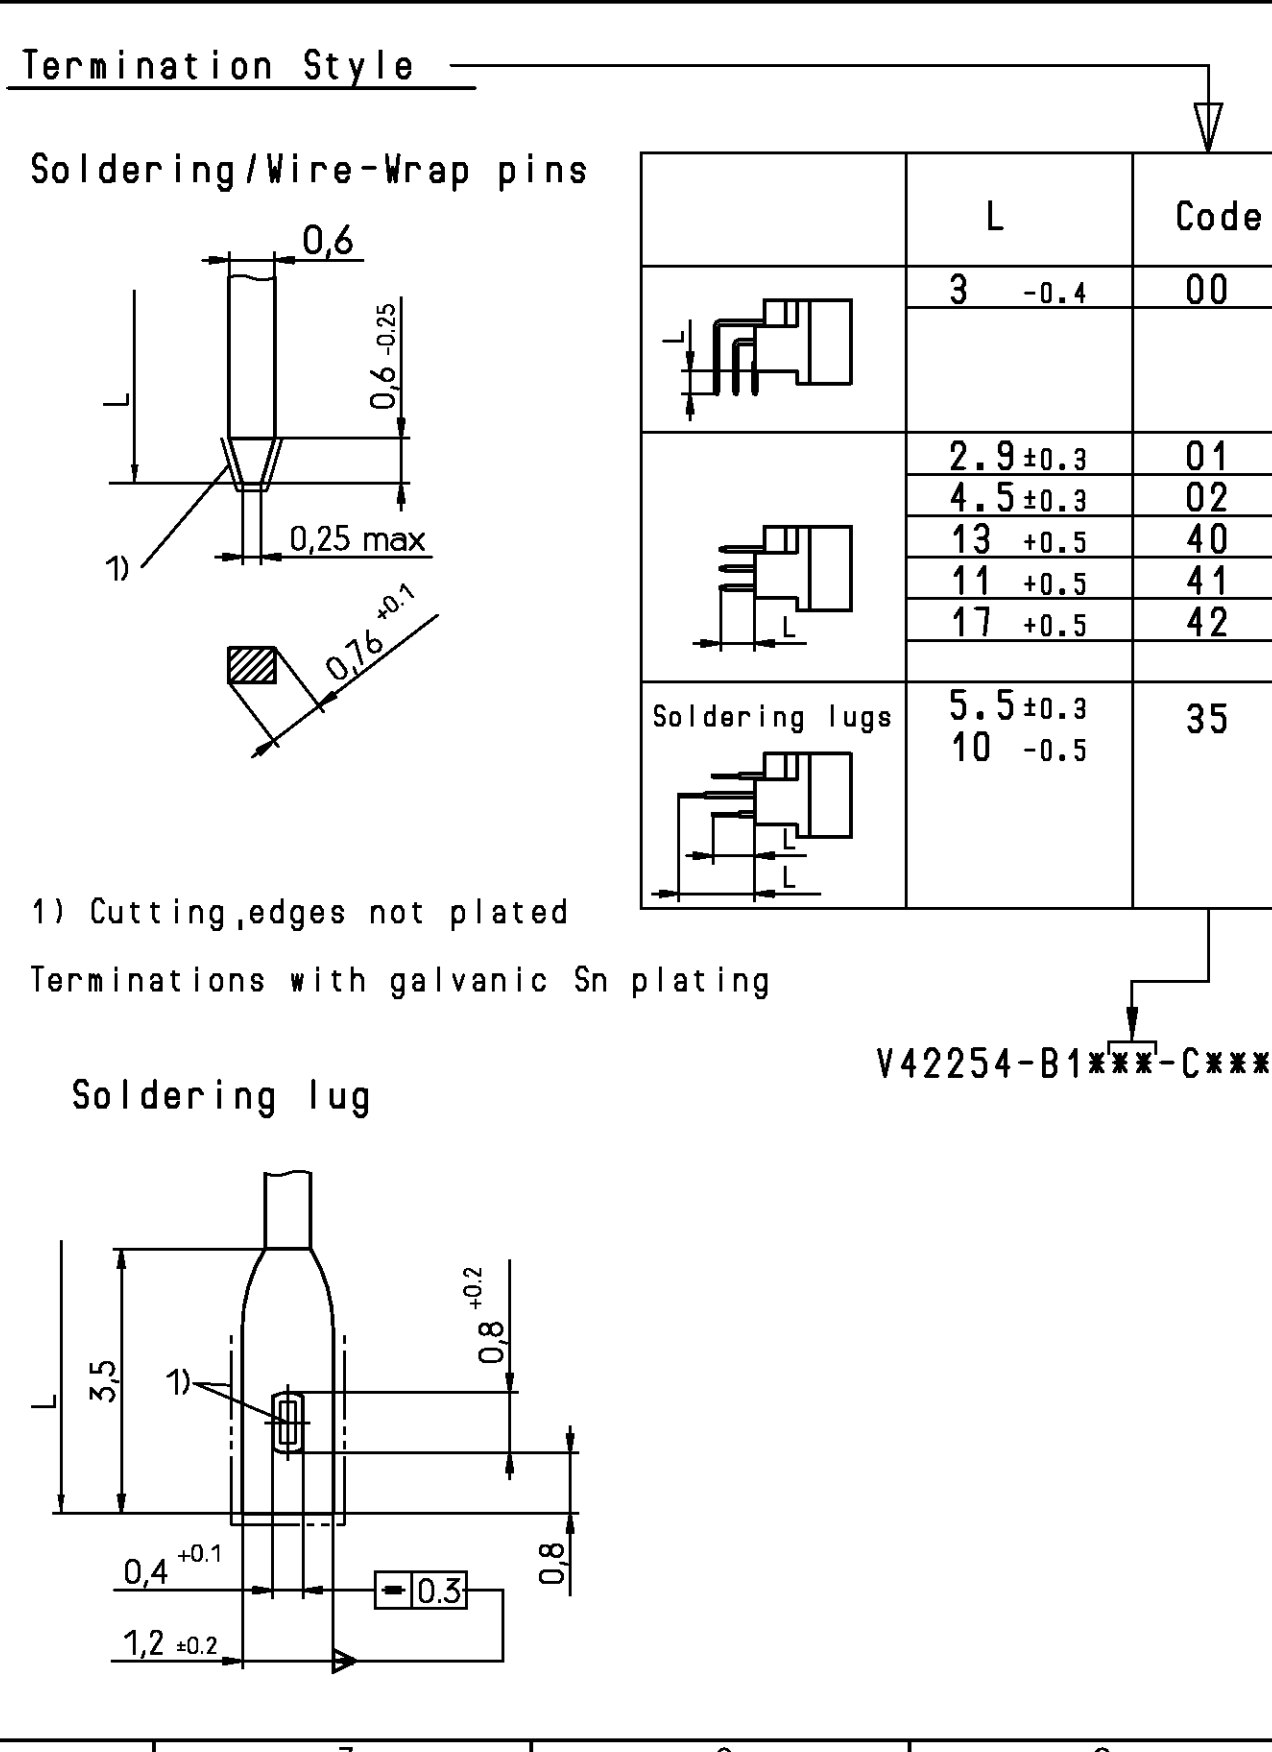
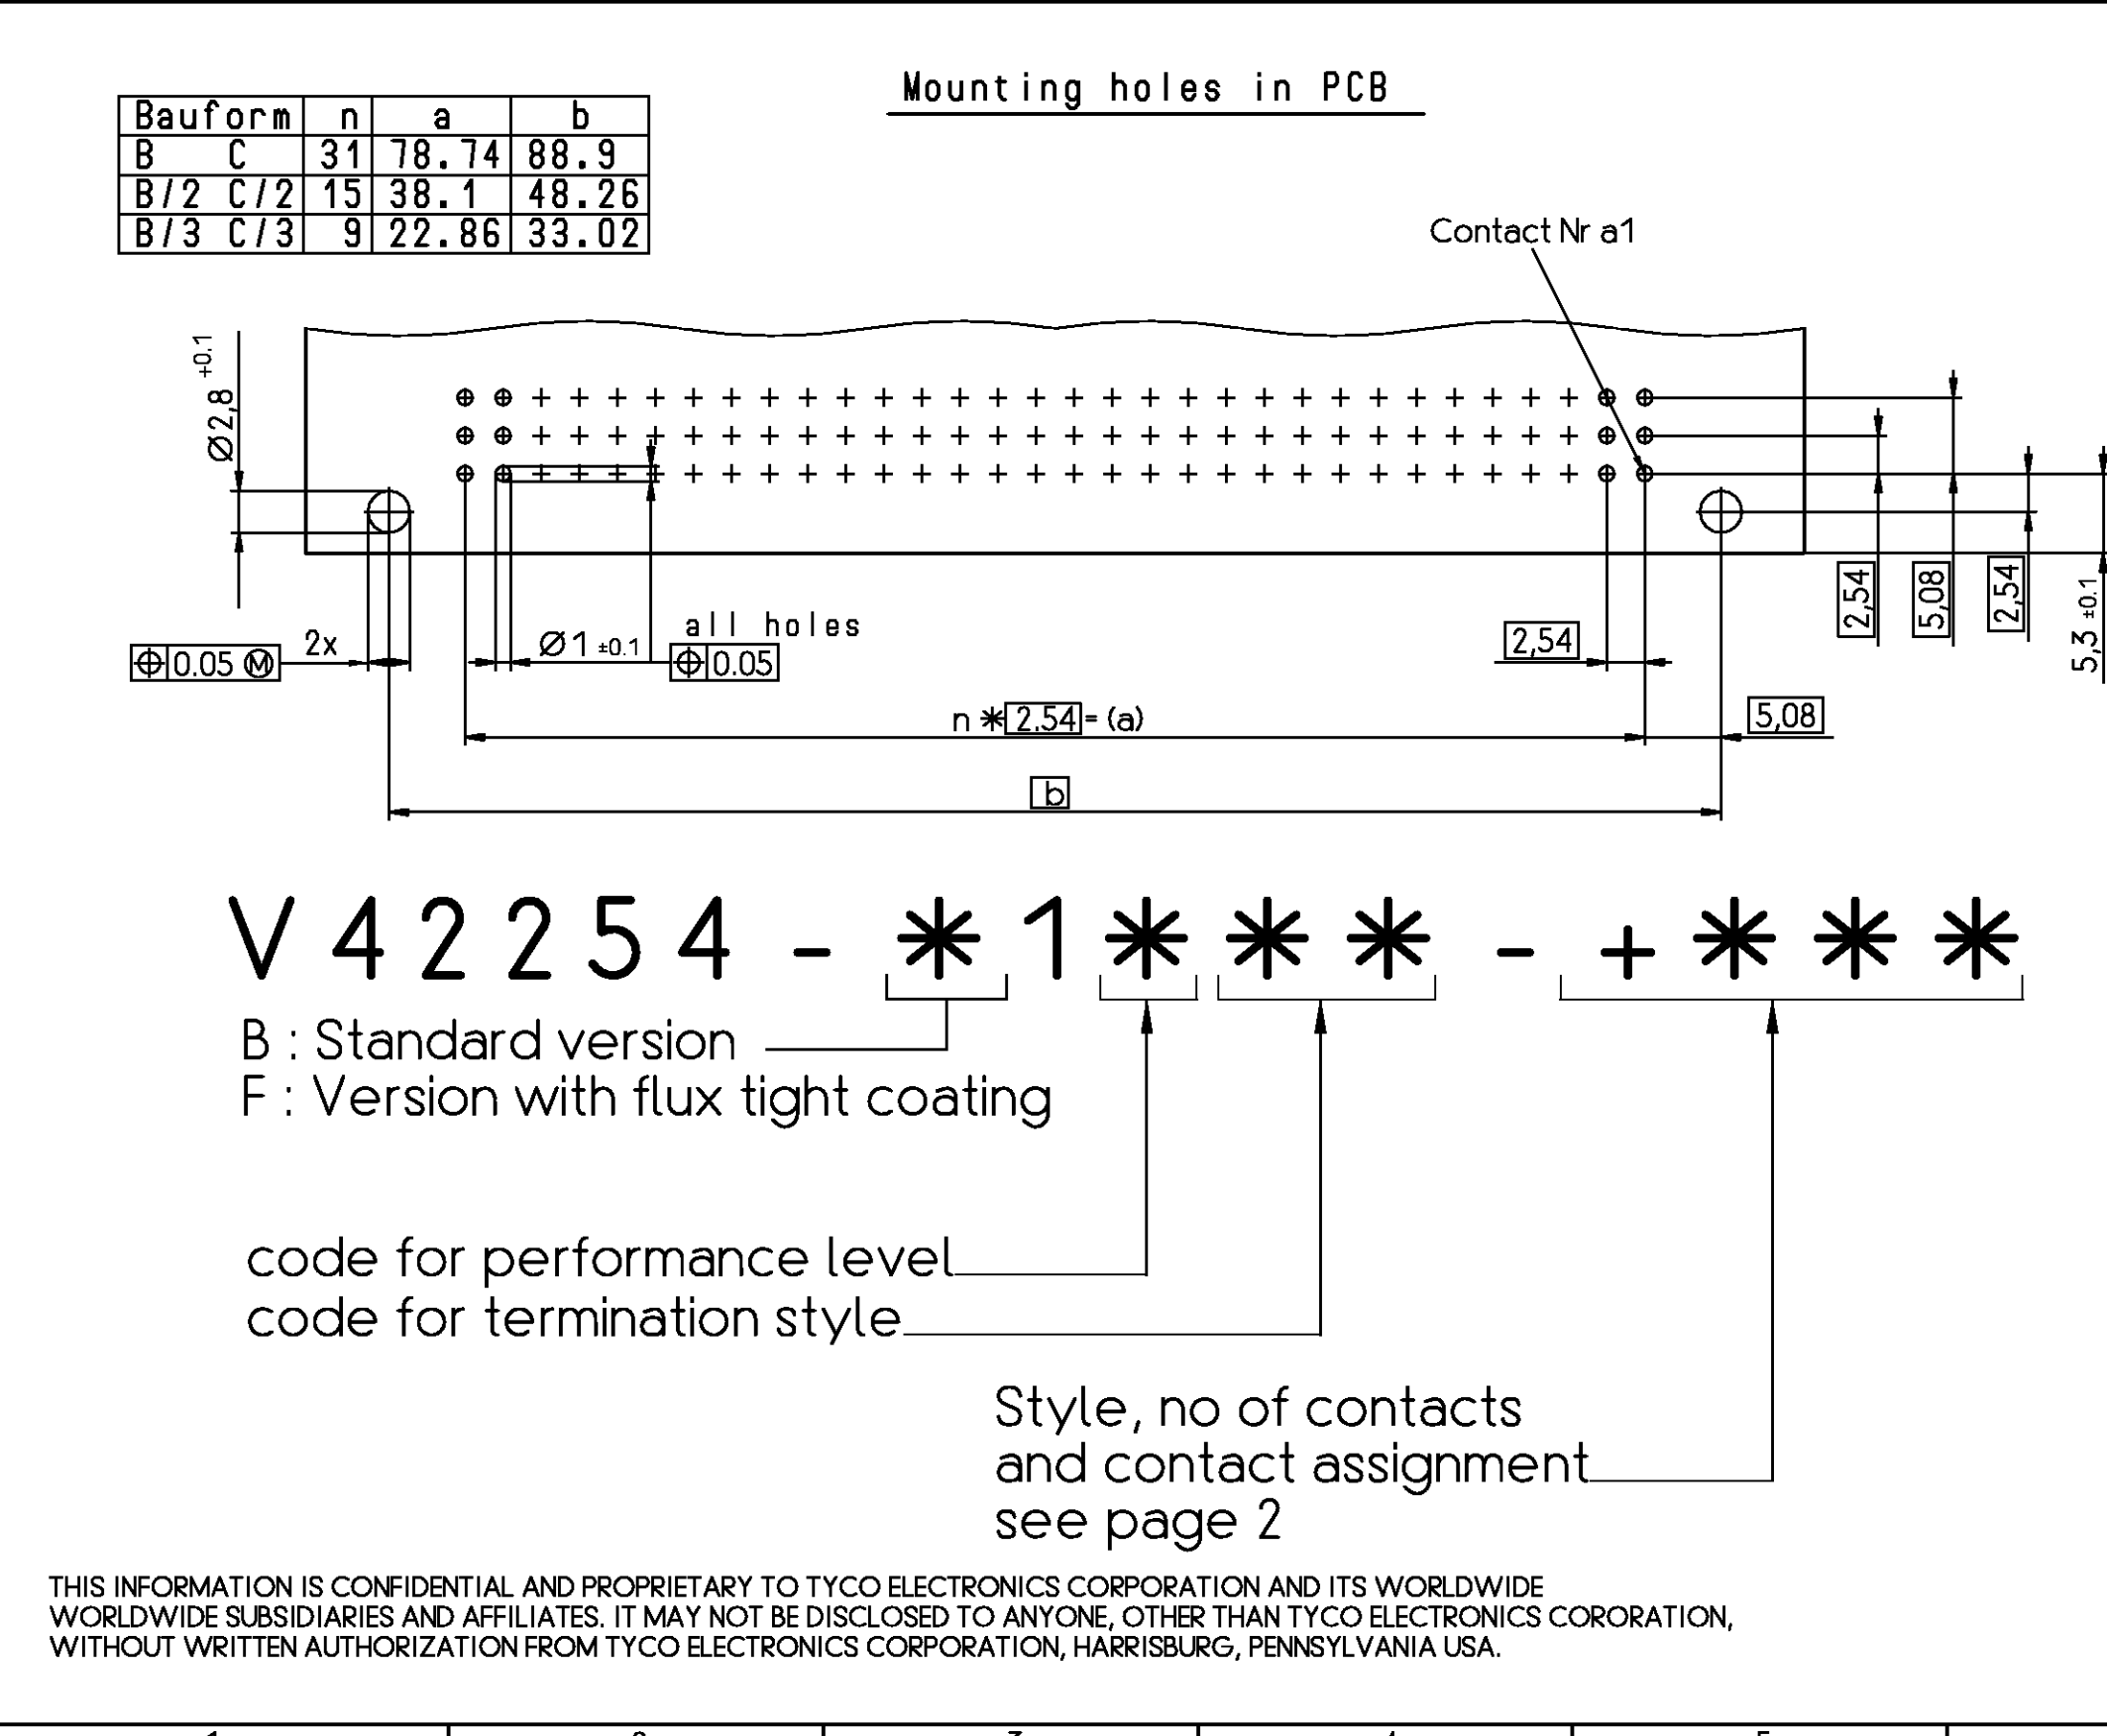


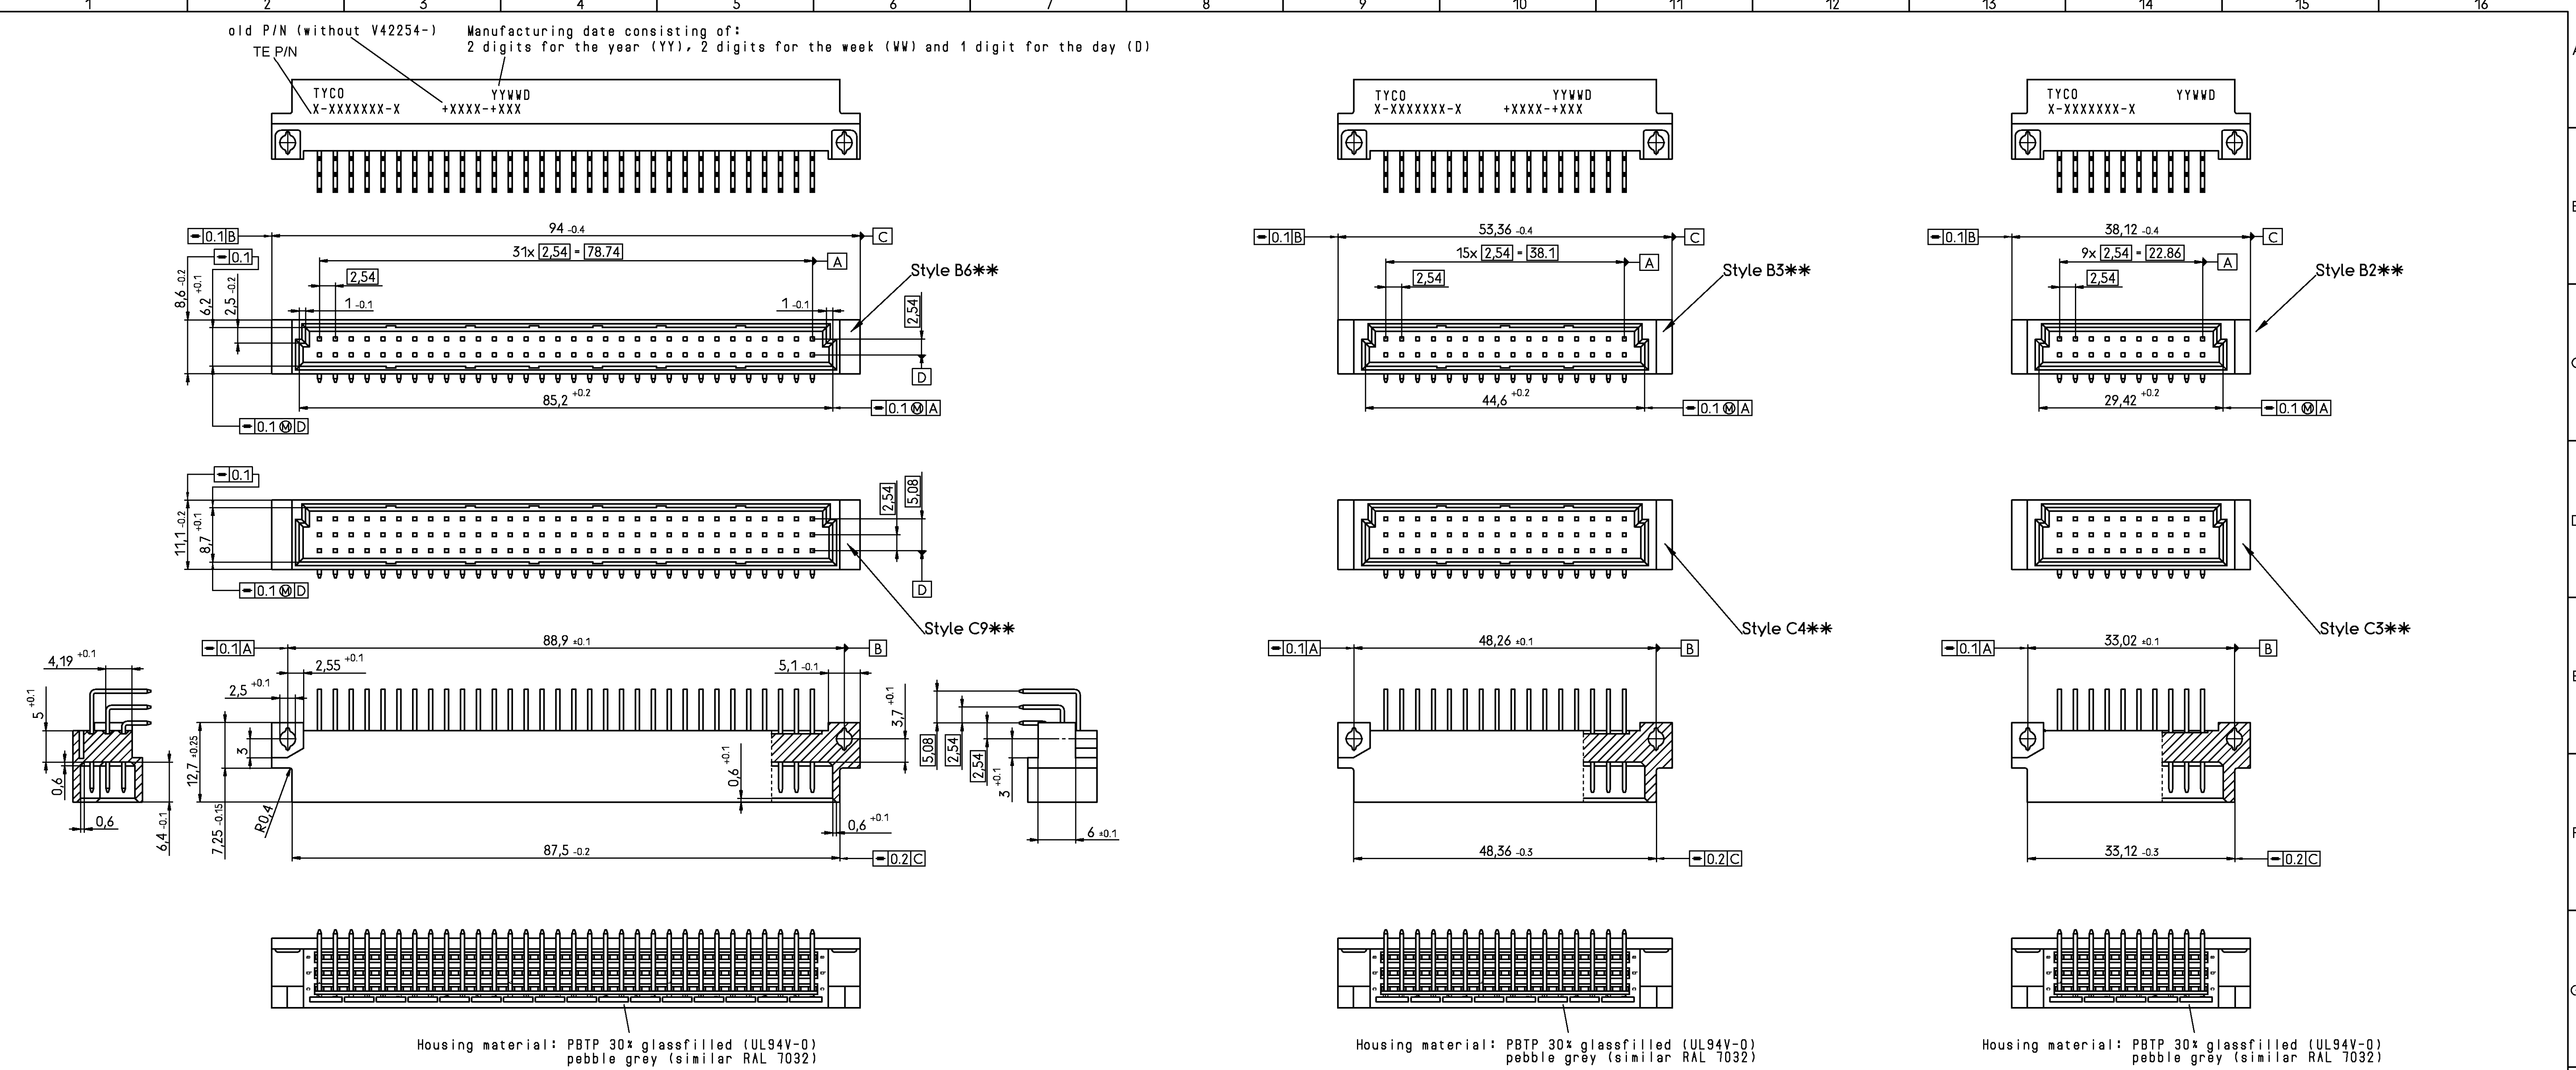

- 4) According BT 236 level 2.
3) According BT 222 level 1.
2) Connectors have a flux-tight coating.
1) First and last contact of each loaded row is a premating (make first / break last) contact.

Active part numbers.
Contact Tyco Electronics for other configuration availability

		TYCO ELECTRONICS CORPORATION OOSTKAMP - BELGIUM				SCALE		WEIGHT	
DIMENSIONS IN MM		MATERIAL		PART NAME		Pin Assembly Eurocard		Types B, C and short versions	
REV		CHANGE ORDER		DATE		APP		Customer Drawing Nr. C 1392009-8	
B5		ECR-10-002555		01 JUN 10		IMKO		DATE 10.02.89	
B4		SR10-0177-03		18 JUN 03		KV		NAME Carelier	
B3		SR10-0413-02		16 Sep 02		BC		DEP PE Com	
B2		SR10-0157-02		13 Mar 02		BC			
B1		SR10-0150-02		28 feb 02		BC			
B		SR10-0198-01		21.05.01		BC		TOLERANCE UNLESS SPECIFIED OTHERWISE	
A		WVO 00/7017		20.07.00		VS			
06		WVO 99/1035		27.09.99		CLW			
PART NO.		V42254-B1***-C***-*-7626		SHT. 2-		OF 2			

Product description code		Part Number		Style & Number of Positions		Termination Posts		Loaded Rows		Standard Pre-Mating 1mm J)		Performance Level		Board Locks	
OBSOLETE	V42254-B1100-B200	1393644-1	B20	right-angle solder leads	every row , every pitch	No	1	No							
	V42254-B1100-B230	1393644-2	B20	right-angle solder leads	every row , every pitch	Yes	1	No							
	V42254-B1100-B220	1393644-3	B22	right-angle solder leads	every row , every pitch	No	1	No							
	V42254-B1100-B640	1393644-4	B64	right-angle solder leads	every row , every pitch	No	1	No							
	V42254-B1100-B641	1393644-5	B64	right-angle solder leads	row a , every pitch	No	1	No							
OBSOLETE	V42254-B1100-B645	1393644-6	B64	right-angle solder leads	every row , every even pitch	No	1	No							
	V42254-B1100-C480	1393644-9	C48	right-angle solder leads	every row , every pitch	No	1	No							
	V42254-B1100-C483	1-1393644-0	C48	right-angle solder leads	row atc , every pitch	No	1	No							
	V42254-B1100-C910	1-1393644-2	C96	right-angle solder leads	every row , every pitch	No	1	Yes							
	V42254-B1100-C960	1-1393644-6	C96	right-angle solder leads	every row , every pitch	No	1	No							
OBSOLETE	V42254-B1100-C963	1-1393644-7	C96	right-angle solder leads	row atc , every pitch	No	1	No							
	V42254-B1100-C965	1-1393644-8	C96	right-angle solder leads	every row , every even pitch	No	1	No							
	V42254-B1100-C968	1-1393644-9	C96	right-angle solder leads	row atc , every even pitch	No	1	No							
	V42254-B1100-C968H	2-1393644-0	C96	right-angle solder leads	row atc , every even pitch	No	1	No							
	V42254-B1101-B230	3-1393644-2	B20	2,9mm straight solder leads	every row , every pitch	Yes	1	No							
OBSOLETE	V42254-B1102-B320	3-1393644-3	B32	4,5mm straight solder leads	every row , every pitch	No	1	No							
	V42254-B1102-B640	3-1393644-4	B64	4,5mm straight solder leads	every row , every pitch	No	1	No							
	V42254-B1102-C960	3-1393644-5	C96	4,5mm straight solder leads	every row , every pitch	No	1	No							
	V42254-B1102-C963	3-1393644-6	C96	4,5mm straight solder leads	row atc , every pitch	No	1	No							
	V42254-B1135-B640	4-1393644-0	B64	solder lugs	every row , every pitch	No	1	No							
OBSOLETE	V42254-B1200-B200	5-1393644-6	B20	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-B1200-B310	5-1393644-8	B32	right-angle solder leads	every row , every pitch	No	2	Yes							
	V42254-B1200-B320	5-1393644-9	B32	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-B1200-B321	6-1393644-0	B32	right-angle solder leads	row a , every pitch	No	2	No							
	V42254-B1200-B610	6-1393644-3	B64	right-angle solder leads	every row , every pitch	No	2	Yes							
OBSOLETE	V42254-B1200-B611	6-1393644-4	B64	right-angle solder leads	row a , every pitch	No	2	Yes							
	V42254-B1200-B630	6-1393644-5	B64	right-angle solder leads	every row , every pitch	Yes	2	No							
	V42254-B1200-B640	6-1393644-6	B64	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-B1200-B641	6-1393644-7	B64	right-angle solder leads	row a , every pitch	No	2	No							
	V42254-B1200-B645	6-1393644-8	B64	right-angle solder leads	every row , every even pitch	No	2	No							
OBSOLETE	V42254-B1200-C300	6-1393644-9	C30	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-B1200-C303	7-1393644-0	C30	right-angle solder leads	row atc , every pitch	No	2	No							
	V42254-B1200-C310	7-1393644-1	C30	right-angle solder leads	every row , every pitch	No	2	Yes							
	V42254-B1200-C313	7-1393644-2	C30	right-angle solder leads	row atc , every pitch	No	2	Yes							
	V42254-B1200-C410	7-1393644-4	C48	right-angle solder leads	every row , every pitch	No	2	Yes							
OBSOLETE	V42254-B1200-C413	7-1393644-5	C48	right-angle solder leads	row atc , every pitch	No	2	Yes							
	V42254-B1200-C430	7-1393644-6	C48	right-angle solder leads	every row , every pitch	Yes	2	No							
	V42254-B1200-C433	7-1393644-7	C48	right-angle solder leads	row atc , every pitch	No	2	No							
	V42254-B1200-C453	7-1393644-9	C48	right-angle solder leads	row atc , every pitch	Yes	2	Yes							
	V42254-B1200-C480	8-1393644-0	C48	right-angle solder leads	every row , every pitch	No	2	No							
OBSOLETE	V42254-B1200-C483	8-1393644-1	C48	right-angle solder leads	row atc , every pitch	No	2	No							
	V42254-B1200-C485	8-1393644-2	C48	right-angle solder leads	every row , every even pitch	No	2	No							
	V42254-B1200-C910	8-1393644-3	C96	right-angle solder leads	every row , every pitch	No	2	Yes							
	V42254-B1200-C912	8-1393644-4	C96	right-angle solder leads	row atb , every pitch	No	2	Yes							
	V42254-B1200-C913	8-1393644-5	C96	right-angle solder leads	row atc , every pitch	No	2	Yes							
OBSOLETE	V42254-B1200-C918	8-1393644-6	C96	right-angle solder leads	row atc , every even pitch	No	2	Yes							
	V42254-B1200-C930	8-1393644-7	C96	right-angle solder leads	every row , every pitch	Yes	2	No							
	V42254-B1200-C933	8-1393644-8	C96	right-angle solder leads	row atc , every pitch	Yes	2	No							
	V42254-B1200-C938	8-1393644-9	C96	right-angle solder leads	row atc , every even pitch	Yes	2	No							
	V42254-B1200-C953	9-1393644-0	C96	right-angle solder leads	row atc , every pitch	Yes	2	Yes							
OBSOLETE	V42254-B1200-C960	9-1393644-1	C96	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-B1200-C960B	9-1393644-2	C96	right angle solder leads	every row , every pitch	No	2	No							
	V42254-B1200-C961	9-1393644-3	C96	right-angle solder leads	row a , every pitch	No	2	No							
	V42254-B1200-C963	9-1393644-4	C96	right-angle solder leads	row atc , every pitch	No	2	No							
	V42254-B1200-C963B	9-1393644-5	C96	right-angle solder leads	row atc , every pitch	No	2	No							
OBSOLETE	V42254-B1200-C965	9-1393644-6	C96	right-angle solder leads	every row , every even pitch	No	2	No							
	V42254-B1200-C968	9-1393644-7	C96	right-angle solder leads	row atc , every even pitch	No	2	No							
	V42254-B1201-B320	2-1393645-5	B32	2,9mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1201-B640	1392009-8	B64	2,9mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1201-C300	2-1393645-6	C30	2,9mm straight solder leads	every row , every pitch	No	2	No							
OBSOLETE	V42254-B1201-C480	2-1393645-7	C48	2,9mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1201-C960	2-1393502-6	C96	2,9mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1201-C963	2-1393502-7	C96	2,9mm straight solder leads	row atc , every pitch	No	2	No							
	V42254-B1202-B200	2-1393645-9	B20	4,5mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1202-B320	3-1393645-0	B32	4,5mm straight solder leads	every row , every pitch	No	2	No							
OBSOLETE	V42254-B1202-B640	3-1393645-1	B64	4,5mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1202-C300	1392009-9	C30	4,5mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1202-C480	3-1393645-4	C48	4,5mm straight solder leads	every row , every pitch	No	2	No							
	V42254-B1202-C483	3-1393645-5	C48	4,5mm straight solder leads	row atc , every pitch	No	2	No							
	V42254-B1202-C960	3-1393645-6	C96	4,5mm straight solder leads	every row , every pitch	No	2	No							
OBSOLETE	V42254-B1202-C963	3-1393645-7	C96	4,5mm straight solder leads	row atc , every pitch	No	2	No							
	V42254-B1202-C968	3-1393645-8	C96	4,5mm straight solder leads	row atc , every even pitch	No	2	No							
	V42254-B1235-C480	4-1393645-5	C48	solder lugs	every row , every pitch	No	2	No							
	V42254-B1235-C960	4-1393645-7	C96	solder lugs	every row , every pitch	No	2	No							
	V42254-B1235-C963	4-1393645-8	C96	solder lugs	row atc , every pitch	No	2	No							
OBSOLETE	V42254-B1240-B320	5-1393645-1	B32	13mm straight wire-wrap pins	every row , every pitch	No	2	No							
	V42254-B1240-B640	5-1393645-2	B64	13mm straight wire-wrap pins	every row , every pitch	No	2	No							
	V42254-B1240-C300	5-1393645-3	C30	13mm straight wire-wrap pins	every row , every pitch	No	2	No							
	V42254-B1240-C480	5-1393645-4	C48	13mm straight wire-wrap pins	every row , every pitch	No	2	No							
	V42254-B1240-C960	5-1393645-5	C96	13mm straight wire-wrap pins	every row , every pitch	No	2	No							
OBSOLETE	V42254-B1240-C963	5-1393645-7	C96	13mm straight wire-wrap pins	row atc , every pitch	No	2	No							
	V42254-B1240-C963B	5-1393645-8	C96	13mm straight wire-wrap pins	row atc , every pitch	No	2	No							
	V42254-B1300-B640	4-1393646-5	B64	right-angle solder leads	every row , every pitch	No	3	No							
	V42254-B1300-C960	4-1393646-6	C96	right-angle solder leads	every row , every pitch	No	3	No							
	V42254-B1300-C963	4-1393646-7	C96	right-angle solder leads	row atc , every pitch	No	3	No							
OBSOLETE	V42254-F1200-C480	1-1393647-2	C48	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-F1200-C960	1-1393647-3	C96	right-angle solder leads	every row , every pitch	No	2	No							
	V42254-F1200-C963	1-1393647-4	C96	right-angle solder leads	row atc , every pitch	No	2	No							

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE
WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TYCO ELECTRONICS CORPORATION,
WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.