

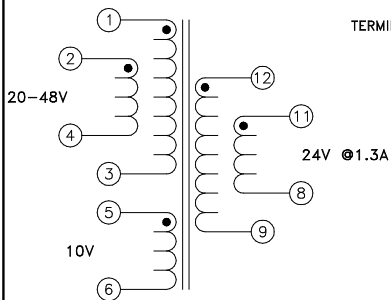


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

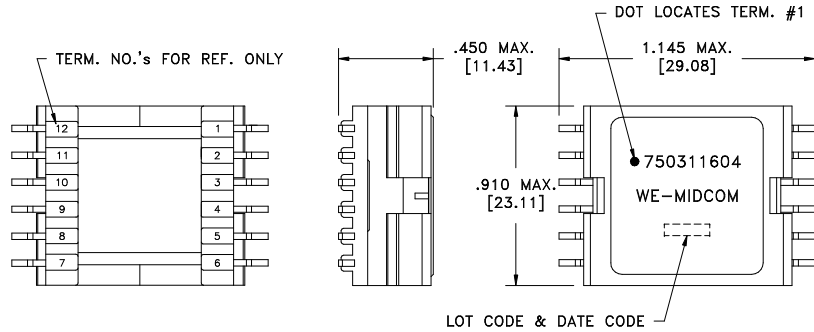

Application of the transformer allows for the following groups of wires to solder bridge: 1&2, 3&4, 11&12, and 8&9.

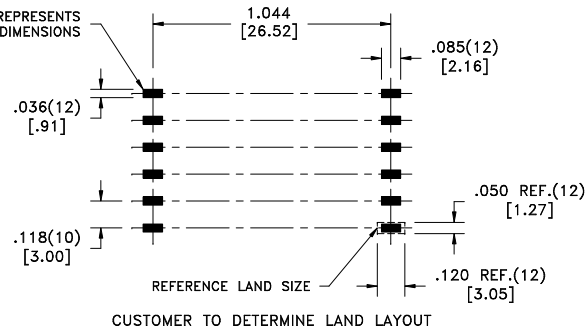

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3	tie(1+2, 3+4), @20°C
D.C. RESISTANCE	8-12	tie(8+9, 11+12), @20°C
D.C. RESISTANCE	5-6	@20°C
INDUCTANCE	1-3	tie(1+2, 3+4), 10kHz, 100mVAC, Ls
SATURATION CURRENT		20% rolloff from initial
LEAKAGE INDUCTANCE	1-3	tie(1+2, 3+4, 8+9+11+12), 100kHz, 10mVAC, Ls
DIELECTRIC	1-12	1875VAC, 1 second
URNS RATIO		(1-3):(12-9)
URNS RATIO		(1-3):(11-8)
URNS RATIO		(1-3):(5-6)
URNS RATIO		(1-3):(2-4)

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0647 www.we-online.com/midcom		Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	TRANSFORMER	750311604
6B	11/10	SEE REVISION SHEET FOR	REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750311604	SPECIFICATION SHEET 1 OF 1
6A	8/10					

