


DETAILS


Product Number	F14325_JENNY-8X1-CY
Family	Jenny
Type	Lens
Color	clear
Diameter	280 + 35 mm
Height	11.5 mm
Style	rectang
Optic Material	Silicone
Holder Material	
Fastening	pin, glue
Status	ready
ROHS Compliant	Yes
Date Updated	1/07/2015




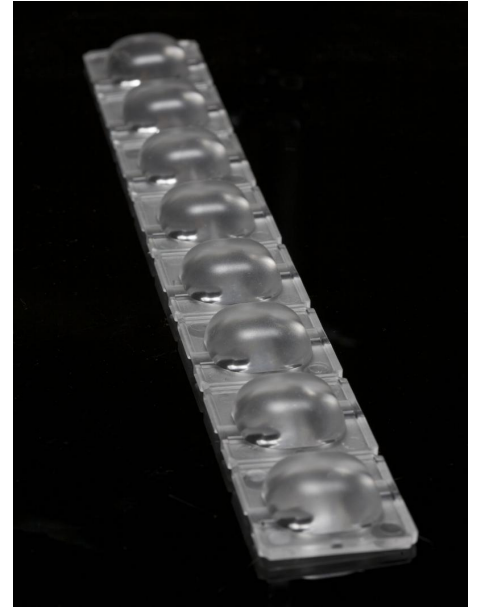


OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
Mini Zenigata (GW6BM)	sim: 105+105	Wide-Area...	sim: 93 %	sim: 0.000	-
MX-6	sim: 102+102	Wide-Area...	sim: 93 %	sim: 0.000	-
V10	102+102 deg	Wide-Area...	94 %	0.430	-
CLU700	102+102 deg	Wide-Area...	93 %	0.470	-
Duris S8	102+102 deg	Wide-Area...	94 %	0.520	-
CLL02x/CLU024	103+103 deg	Wide-Area...	93 %	0.400	-
XM-L EZW	103+103 deg	Wide-Area...	94 %	0.460	-
Luxeon 5258	103+103 deg	Wide-Area...	94 %	0.490	-
LUXEON M	104+104 deg	Wide-Area...	94 %	0.450	-
CLL01x	104+104 deg	Wide-Area...	94 %	0.440	-
XHP50	105+105 deg	Wide-Area...	94 %	0.420	-
MK-R	105+105 deg	Wide-Area...	92 %	0.420	-
V8	105+105 deg	Wide-Area...	94 %	0.400	-
CXA/B 13xx	105+105 deg	Wide-Area...	94 %	0.410	-
NSMx286M	105+105 deg	Wide-Area...	94 %	0.410	-
CXA/B 15xx	106+106 deg	Wide-Area...	94 %	0.380	-
Solieriq P9	106+106 deg	Wide-Area...	94 %	0.390	-
Solieriq P6	107+107 deg	Wide-Area...	94 %	0.400	-
Duris S10	108+108 deg	Wide-Area...	94 %	0.350	-
V6	110+110 deg	Wide-Area...	94 %	0.350	-

Relative intensity of F14531_JENNY-CY_(Duris_S10)

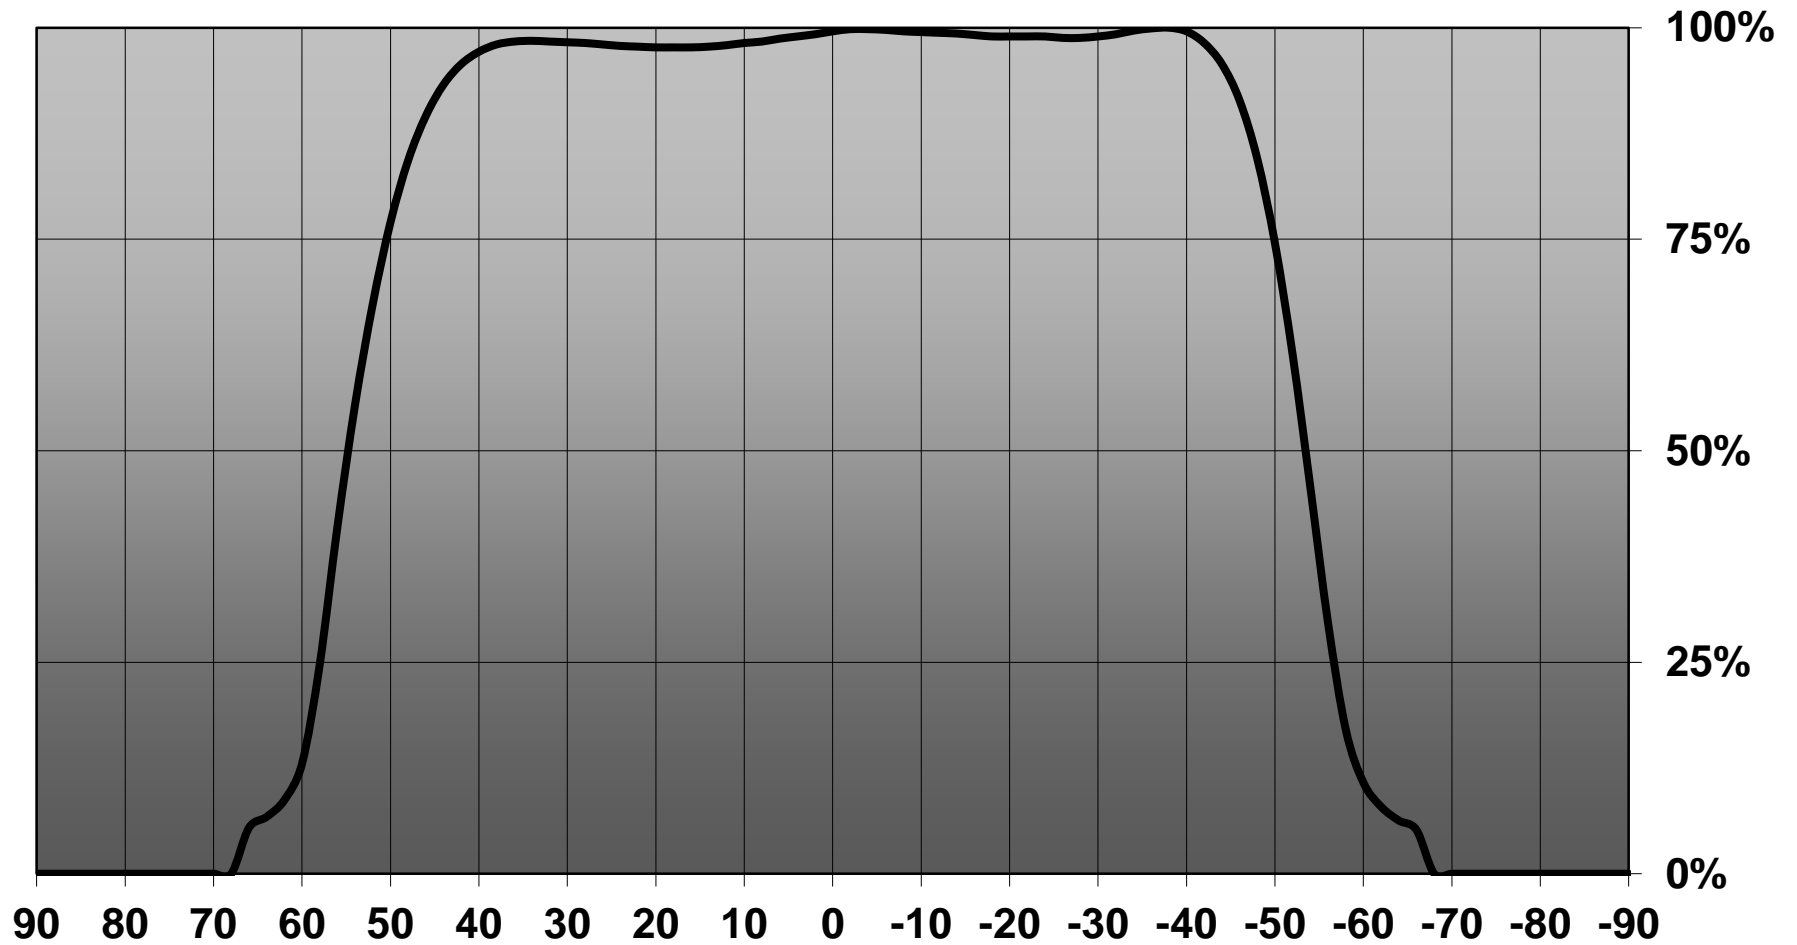


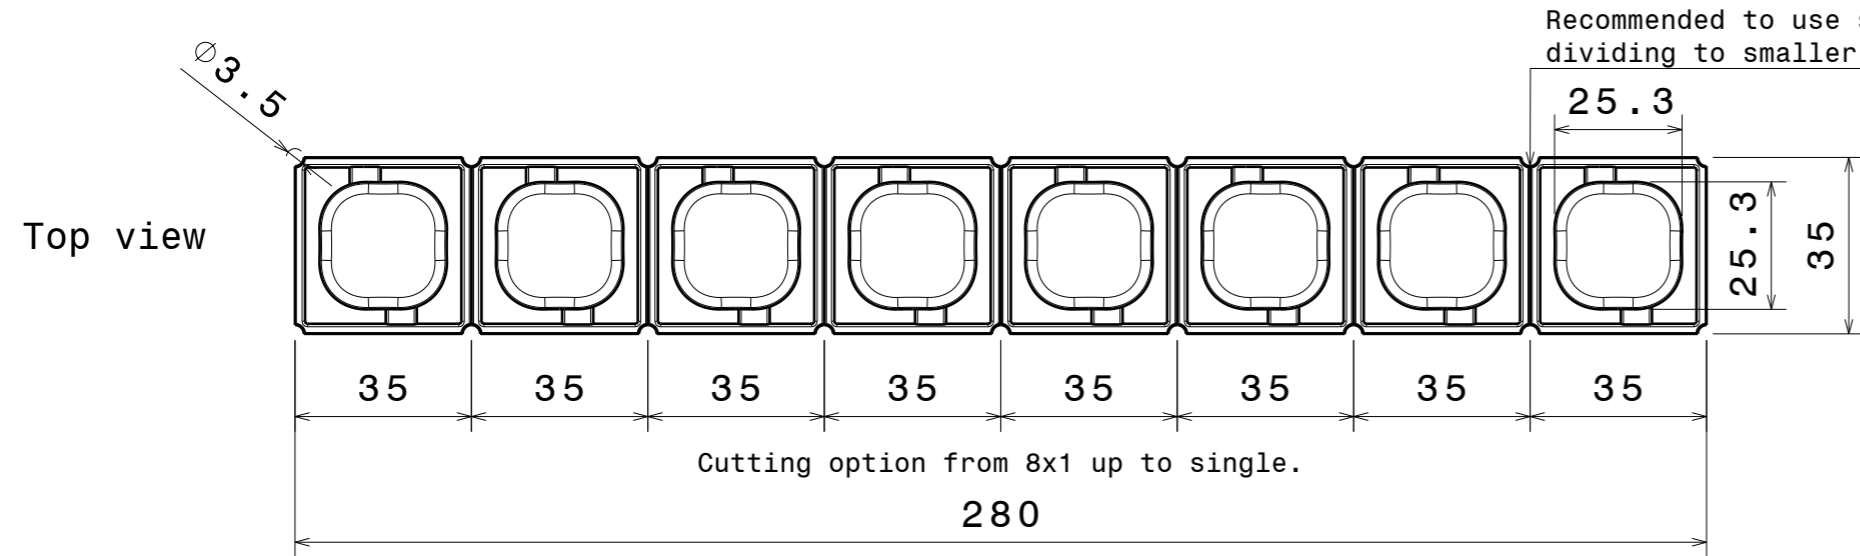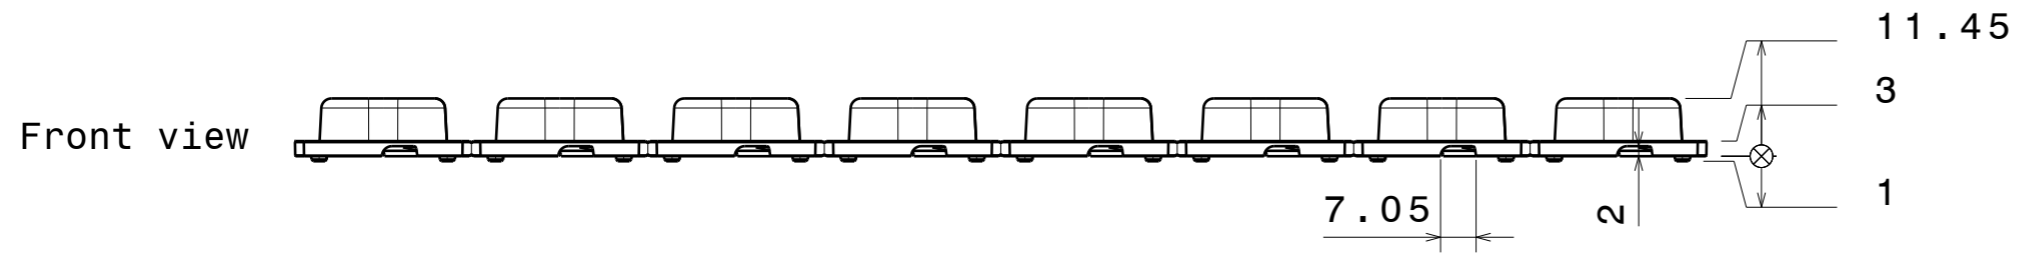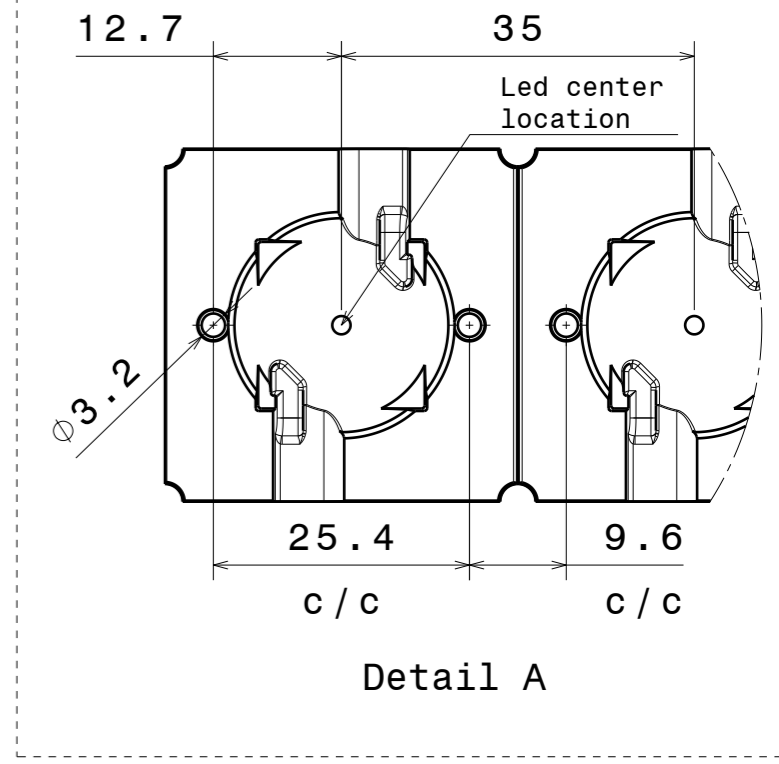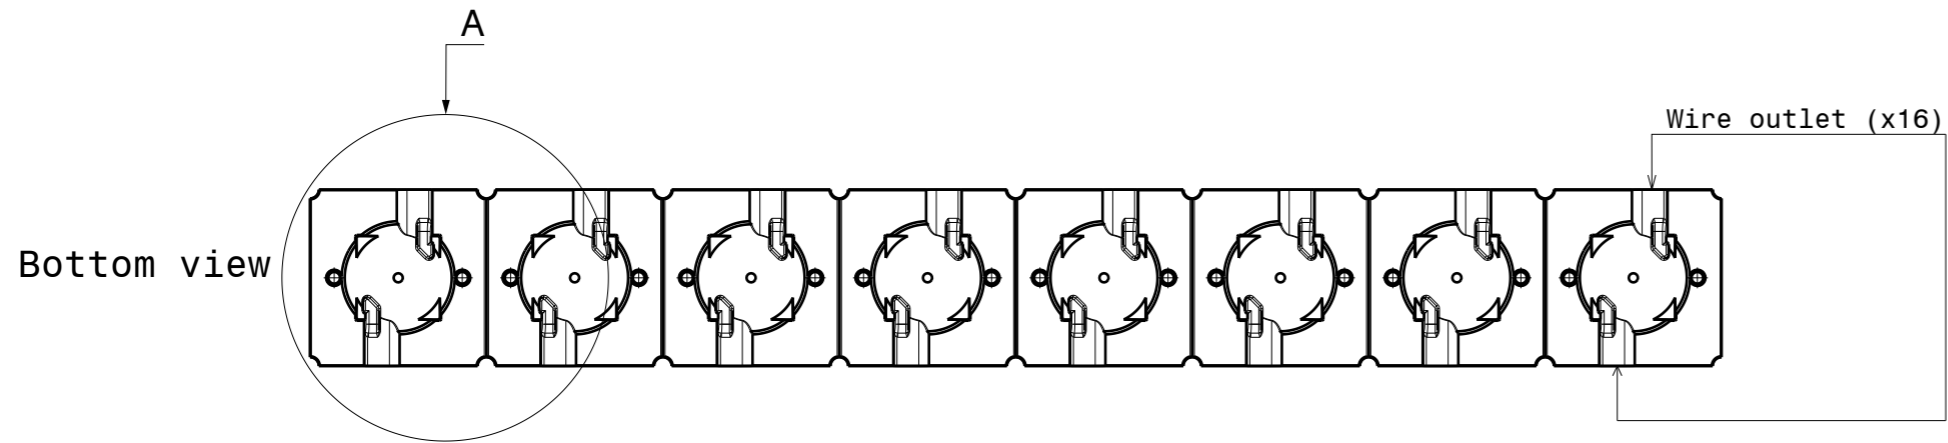

Recommended to use scissors when dividing to smaller units.

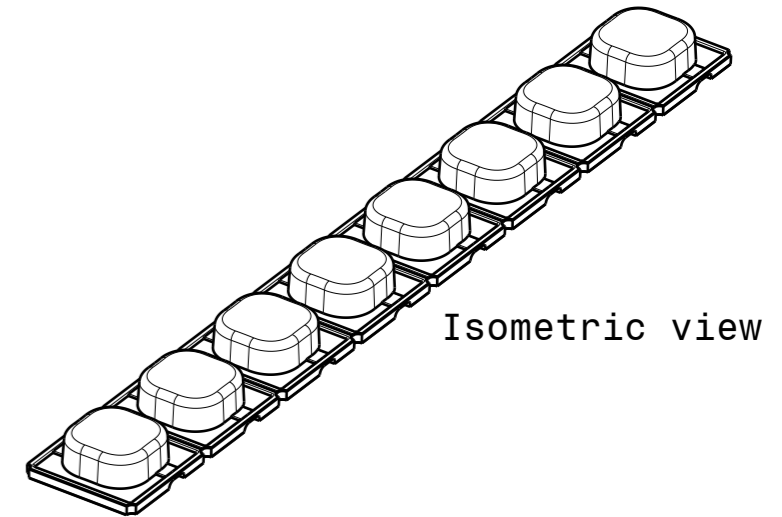

When thermal adhesive tape is used, recommended tape thickness up to 0.3mm. When assembling led ensure correct position in relation to lens position pin hole.

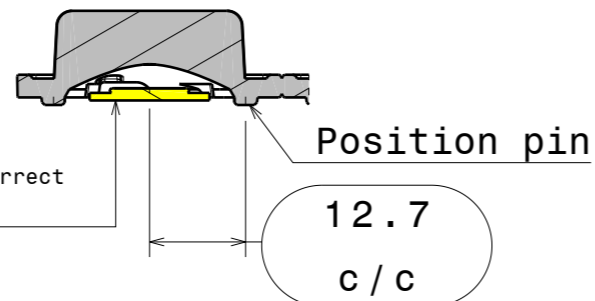

Section view B-B
Scale: 1:1

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	F14325	JENNY-8X1-CY	Optical grade silicon	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures: class V
Please note that due to the elasticity of products made of silicone actual measured values may vary, and therefore typical tolerance values may not be applied.

LEDiL LediL Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
F14325_JENNY-8X1-CY


This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE	PART NUMBER
A3	F14325


SCALE	1:1	WEIGHT		SHEET	1/1
-------	-----	--------	--	-------	-----

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(V10)

Lamps: 1 x BRIDGELUX_V10_(BXRE-30E1000B-X2)_6100lm@250mA_P=50W_I=249.9mA

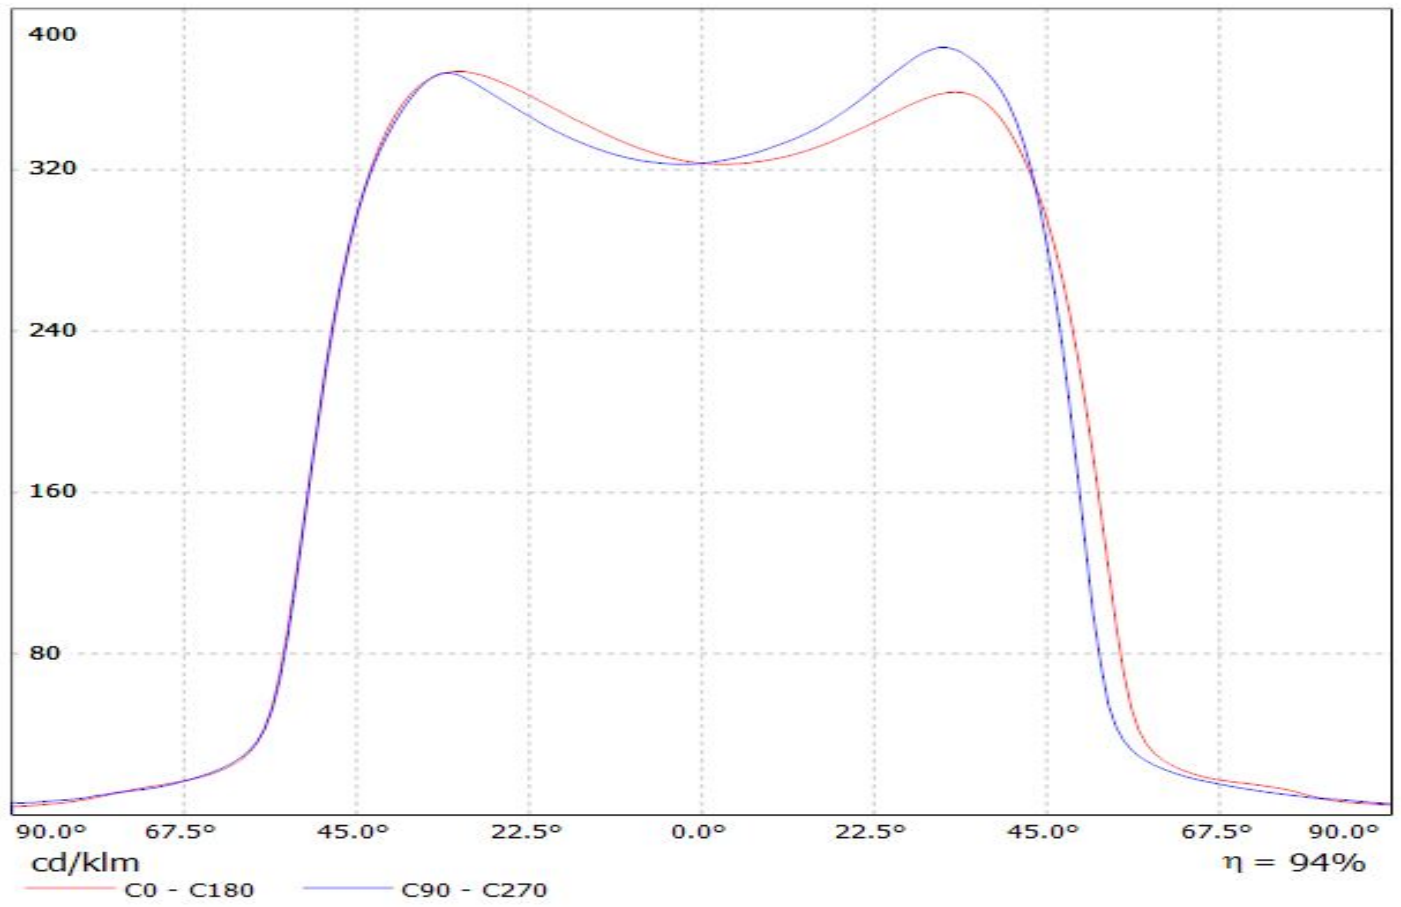


Luminaire: Ledil F14325_JENNY-8X1-CY_(CLU700)
Lamps: 1 x Citizen_CLU700_394.637lm@100mA_P=2.8W_I=0.10A

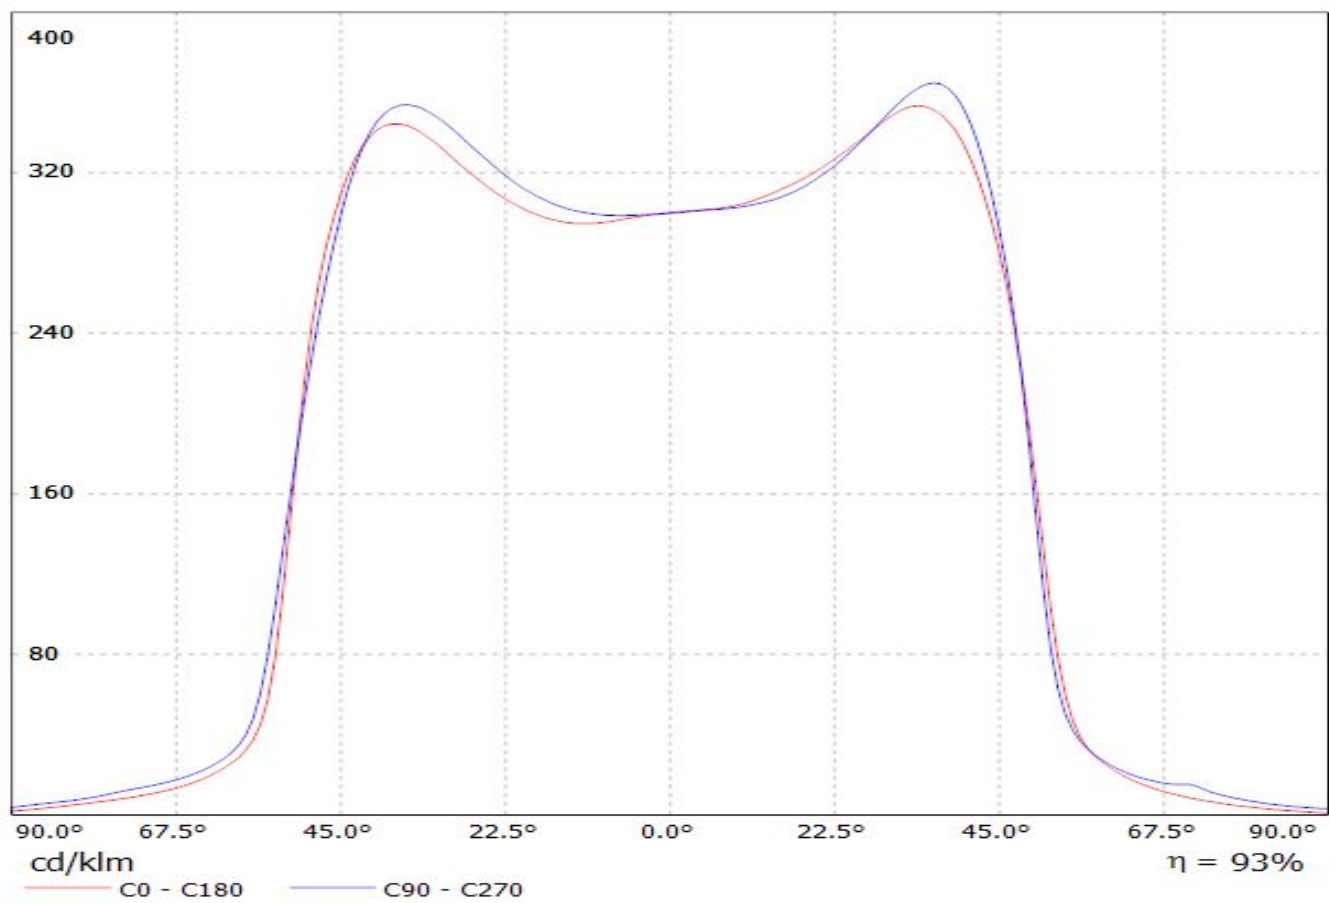

Ledil F14326_JENNY-8X1-T4_(Duris_S8) / LDC (Linear)


Luminaire: Ledil F14326_JENNY-8X1-T4_(Duris_S8)

Lamps: 1 x Osram_Duris_S8_(GW_P9LMS1.EC)_1611.928lm@800mA_CCT=2857K_P=14.4W_I=0.8A

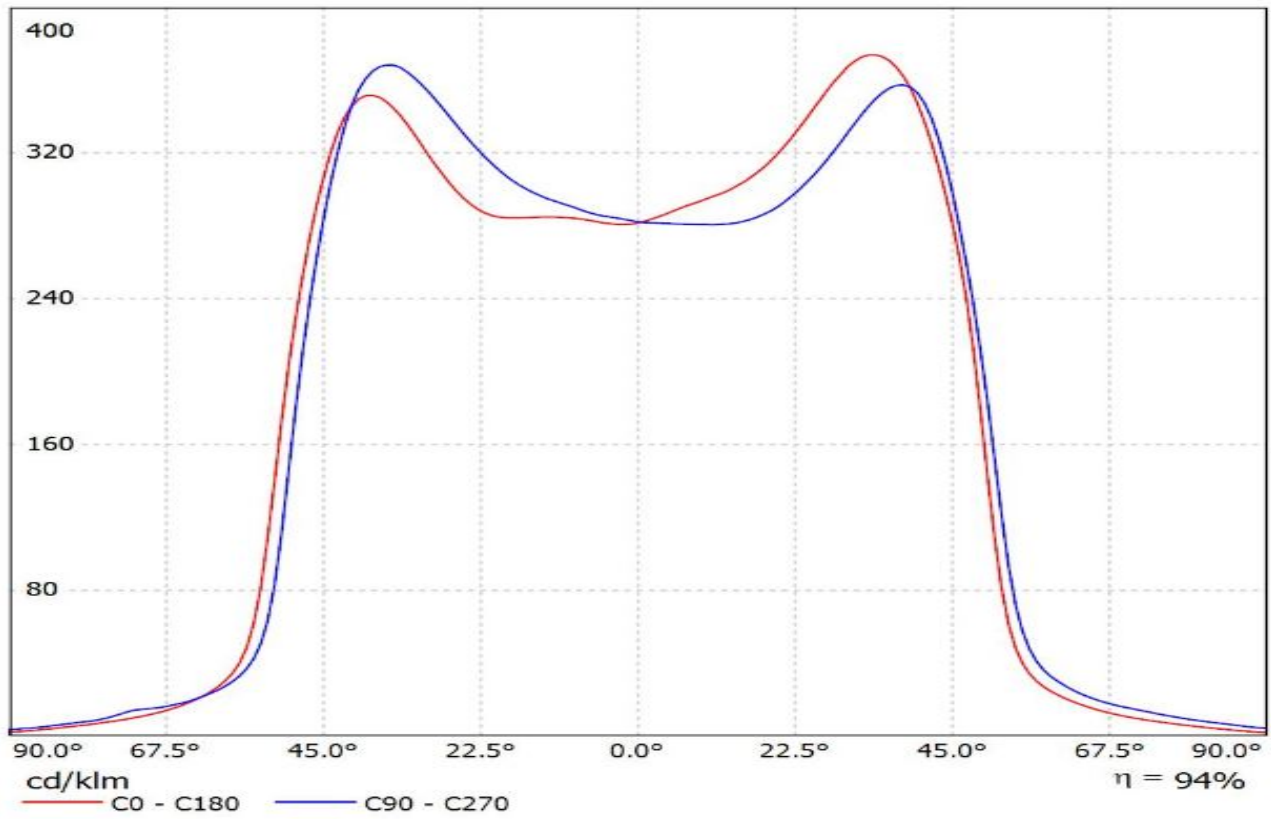


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(CLL022)

Lamps: 1 x CITIZEN_CLL022_x8_(CLL022-1204A5-030H7E1)_5900lm@250mA_P=69W_I=249.8mA

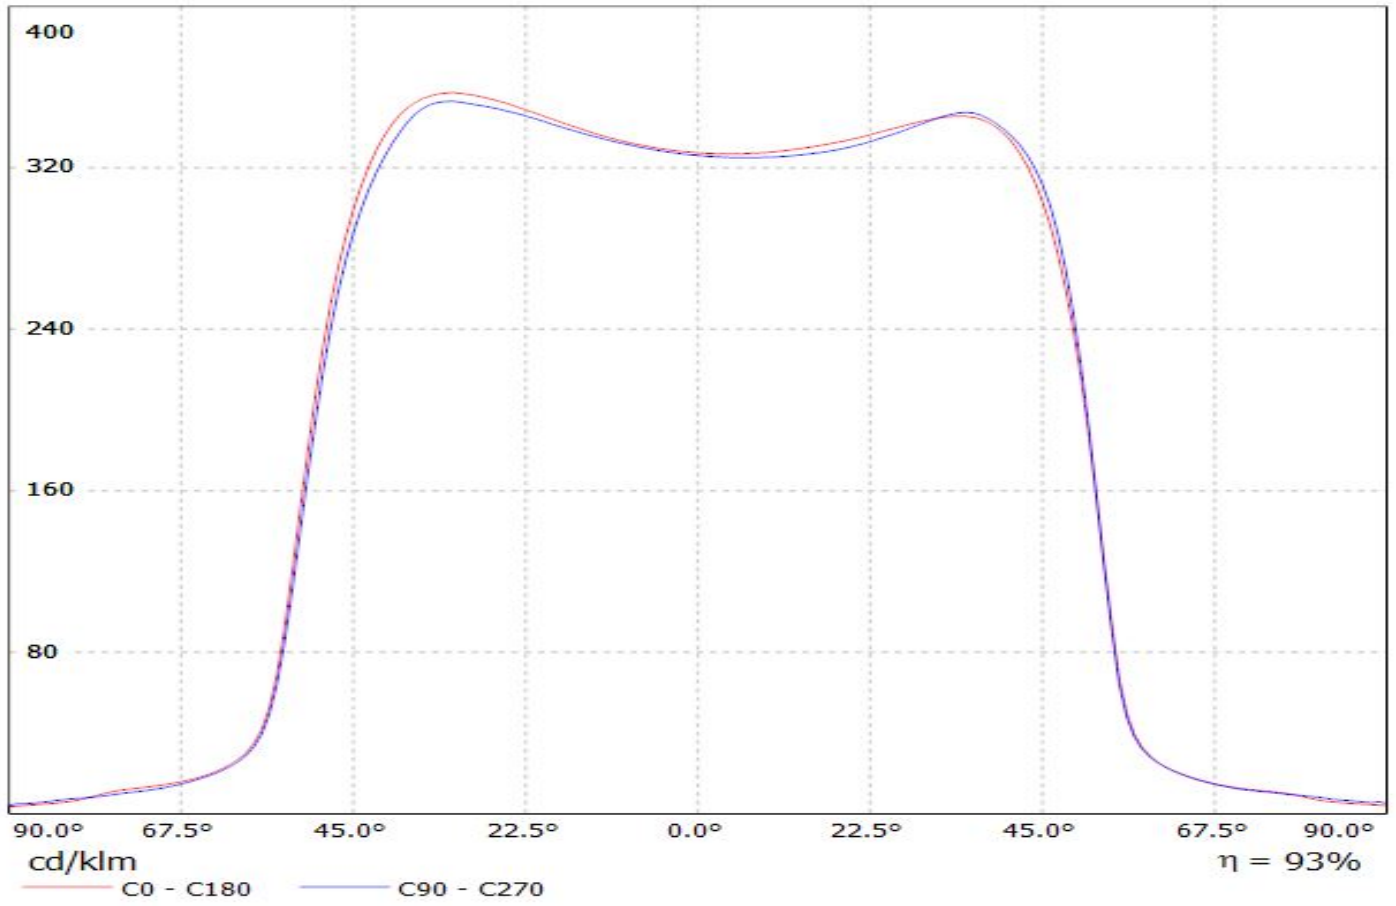


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(XM-L)
Lamps: 1 x CREE_XM-L_EZW_1040lm@250mA_P=12W_I=249.9mA

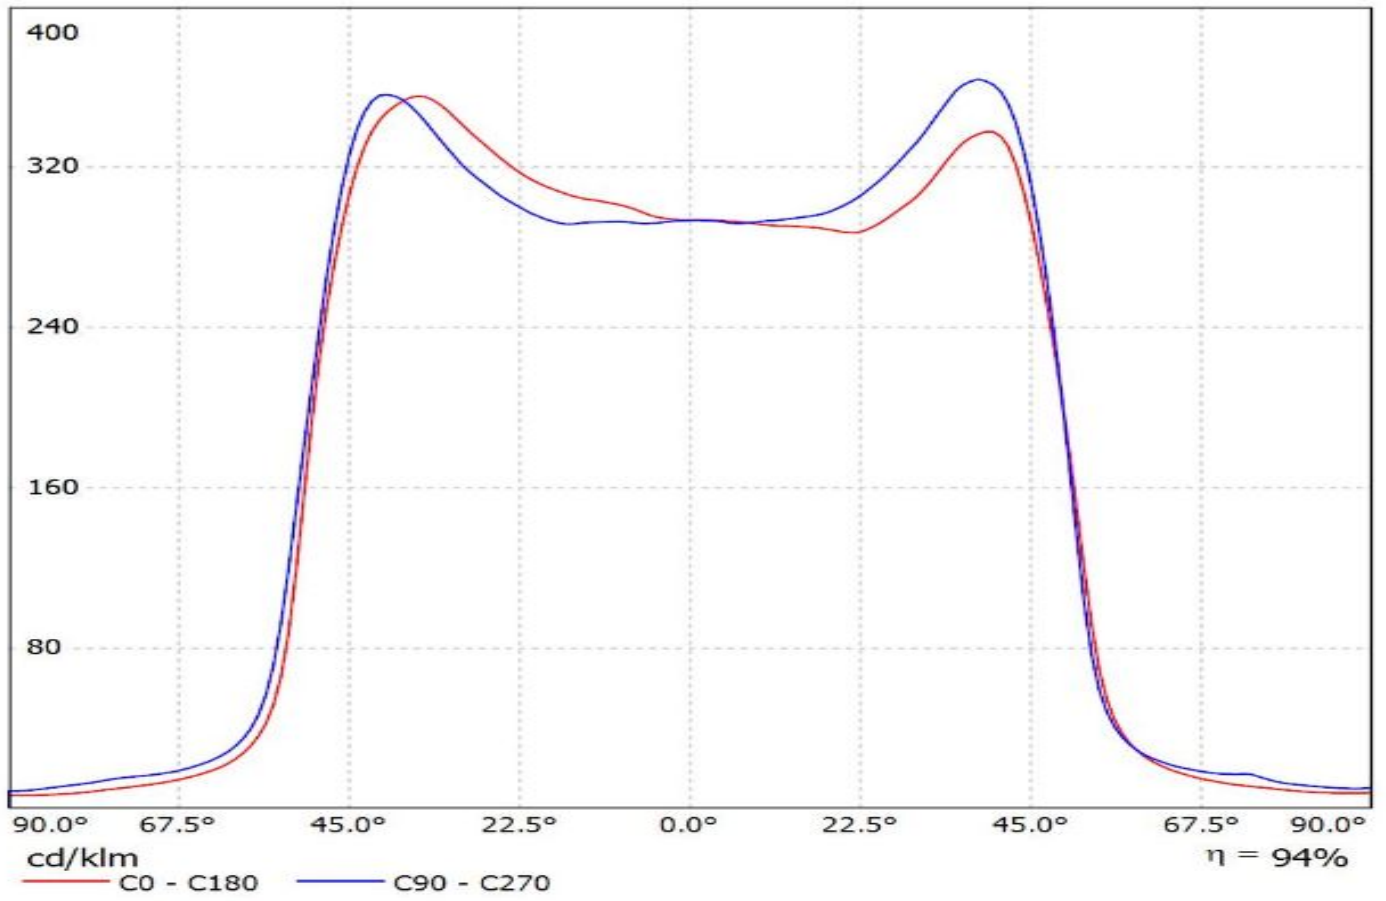


Ledil F14325_JENNY-8X1-CY_(LUXEON_5258) / LDC (Linear)

Luminaire: Ledil F14325_JENNY-8X1-CY_(LUXEON_5258)

Lamps: 1 x LUXEON_5258_(24VOLTS)_2460.584lm@800mA_CCT=2700K_P=18.592W_I=0.8A

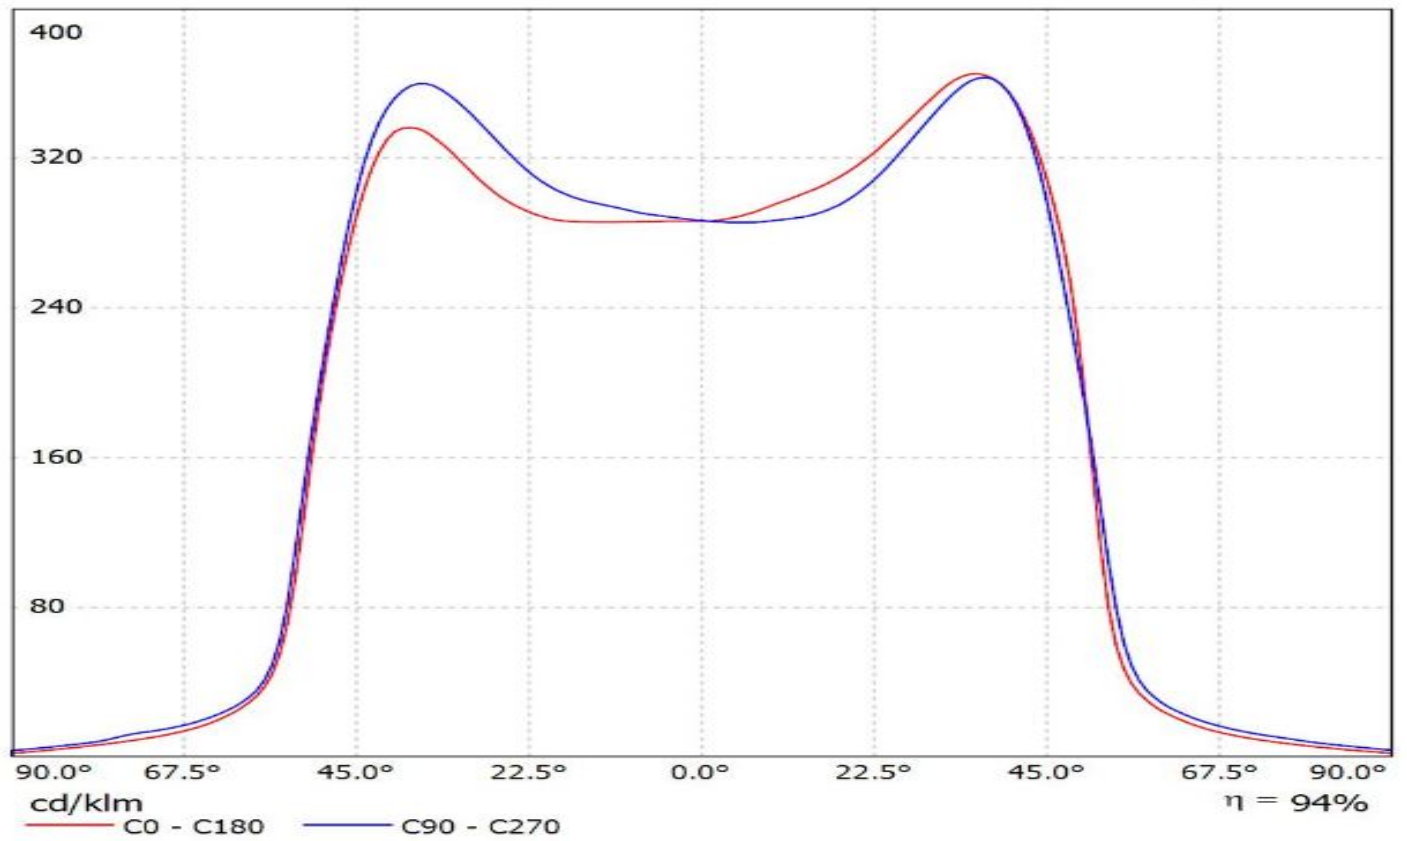


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(LUXEON_M)
Lamps: 1 x LUXEON_M_(LXR7-SW40)_2540lm@250mA_P=21W_I=249.8mA

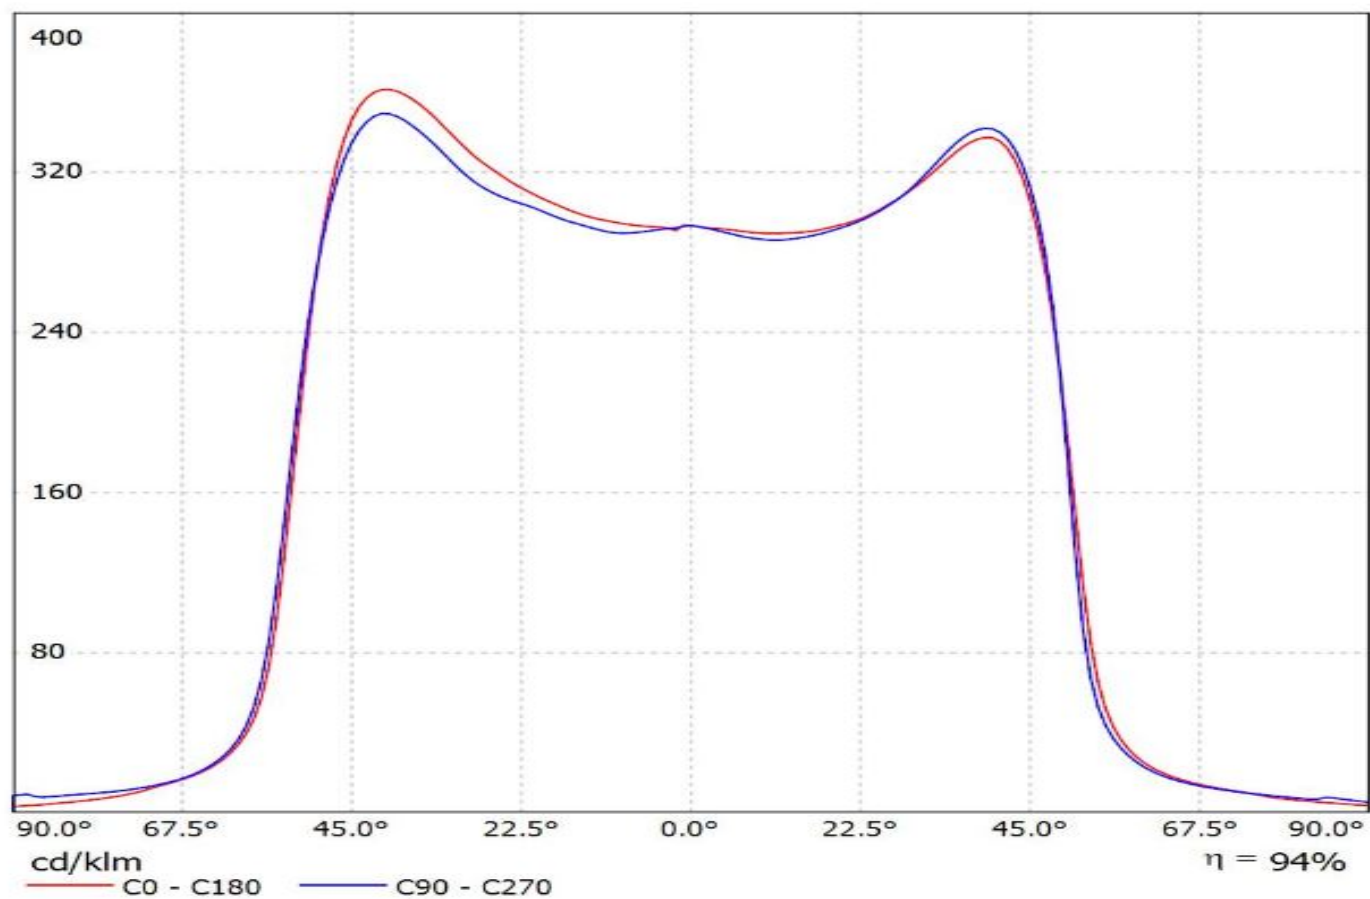

Luminaire: LEDiL Oy F14531_JENNY-CY_(CLL010)


Lamps: 1 x CITIZEN_CLL010_x8_(CLL010-0305A1-303M1A2)_1658.8lm@250mA_P=18W_I=249.9mA

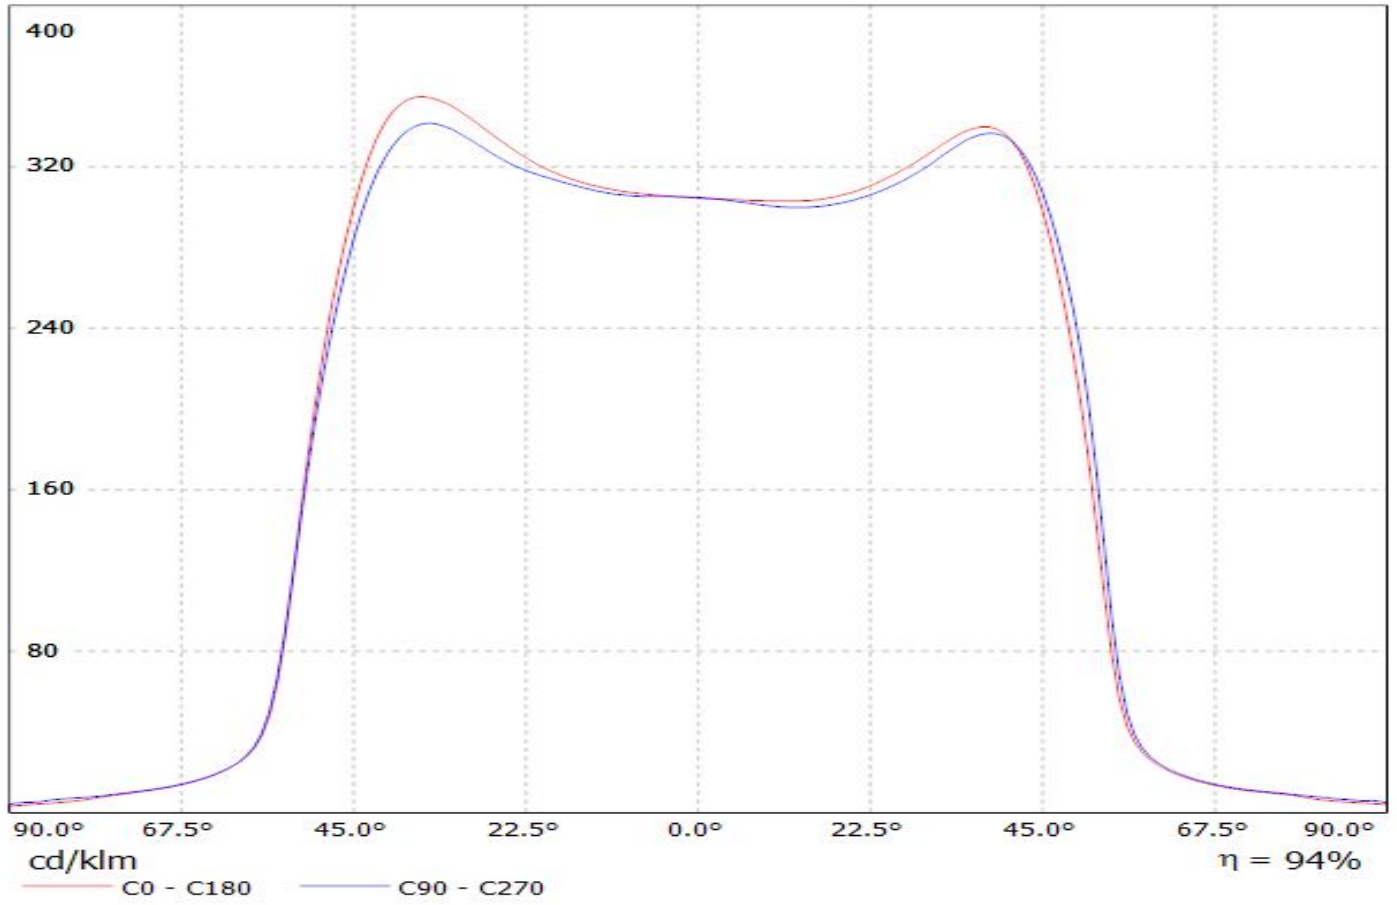


Ledil F14325_JENNY-8X1-CY_(XPH50) / LDC (Linear)

Luminaire: Ledil F14325_JENNY-8X1-CY_(XPH50)


Lamps: 1 x XHP50_warm_white_1686.8lm@250mA_P=11.2166W_I=0.25A

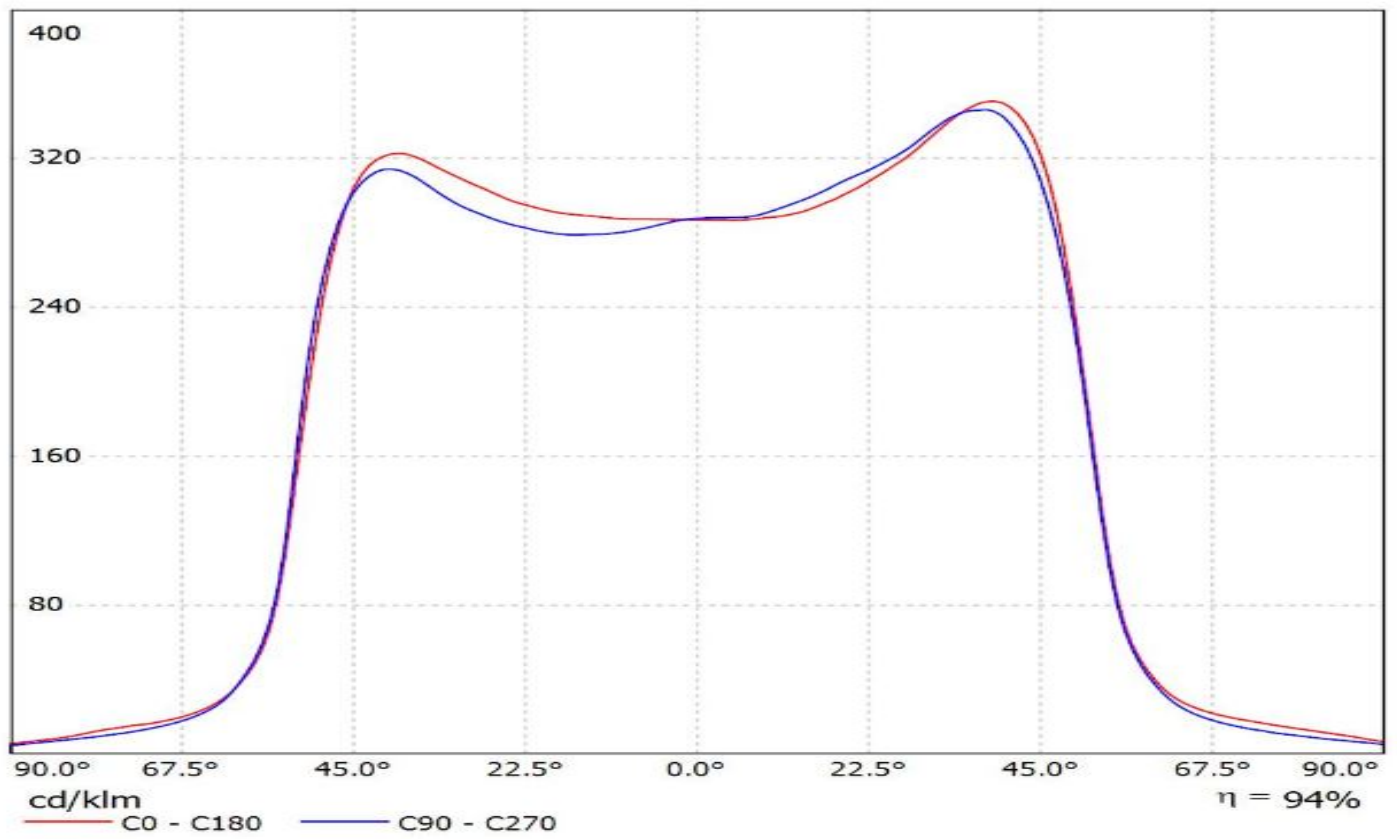


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(MK-R)
Lamps: 1 x MK-R_2820lm@250mA_CCT=3276K_P=22W_I=249.9mA

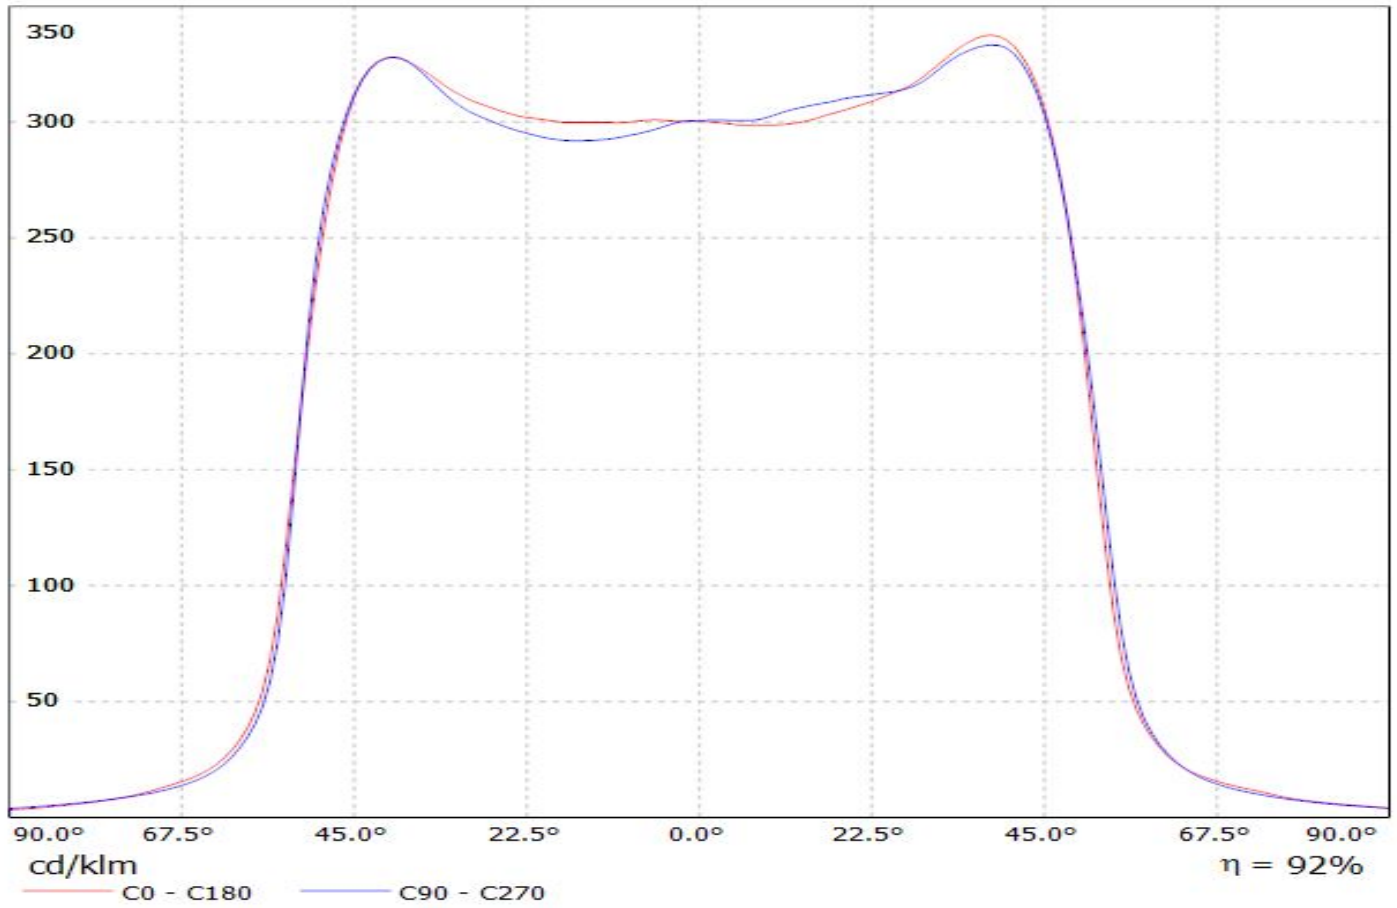

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY
Lamps: 1 x BRIDGELUX_V8_6900lm@250mA_P=70W_I=249.8mA

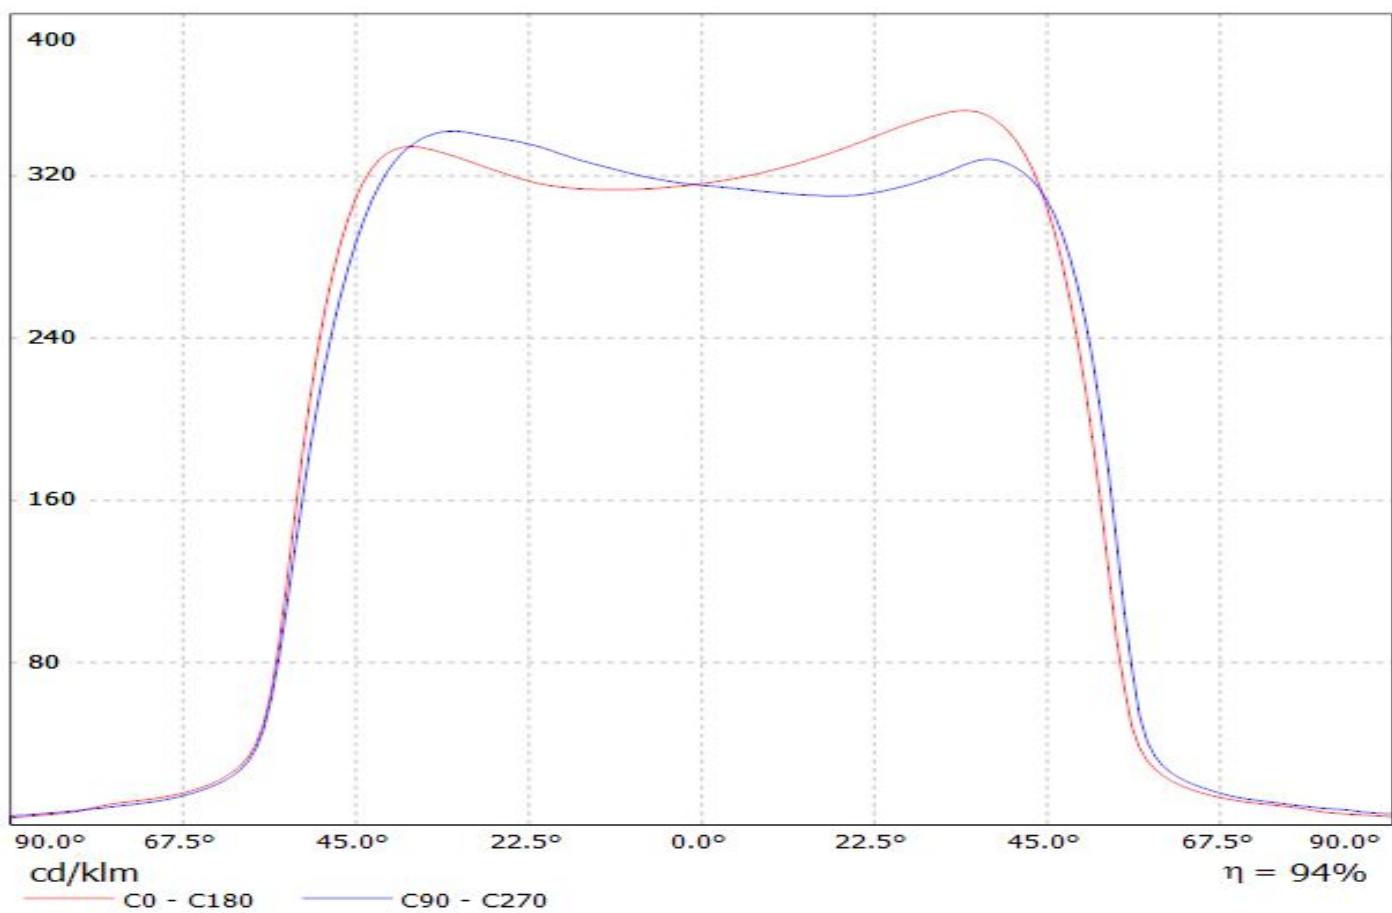


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(CXA1310)
Lamps: 1 x CREE_CXA1310_(CXA1310-30H-G4-F0Y-00001)
_2900lm@250mA_CCT=3000K_P=34W_I=249.8mA

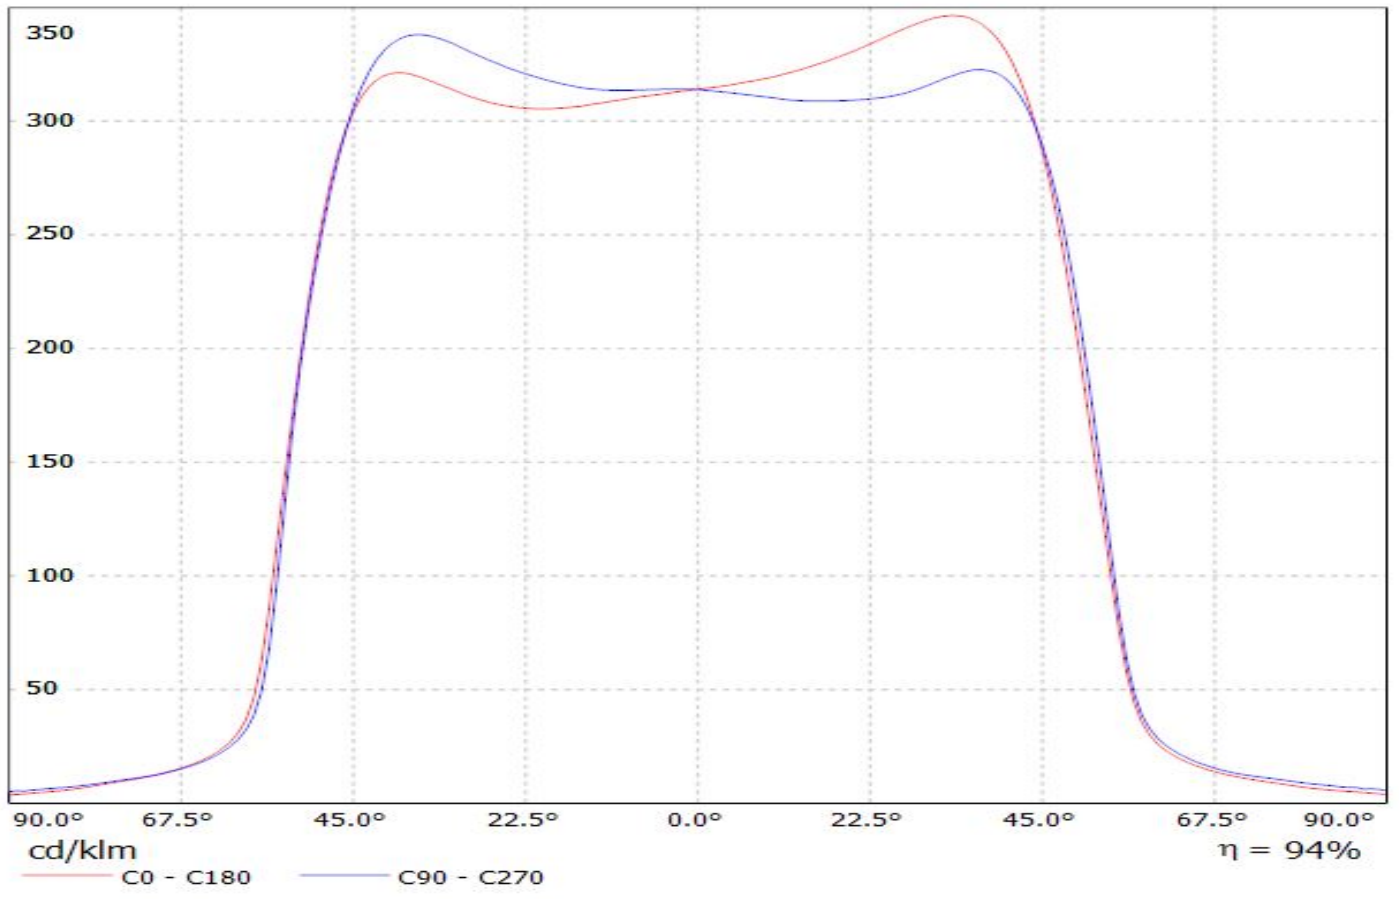


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(NSMx286M)

Lamps: 1 x NICHIA_NSMx286M_(NSML286ME)_2680lm@100mA_P=27W_I=100.1mA

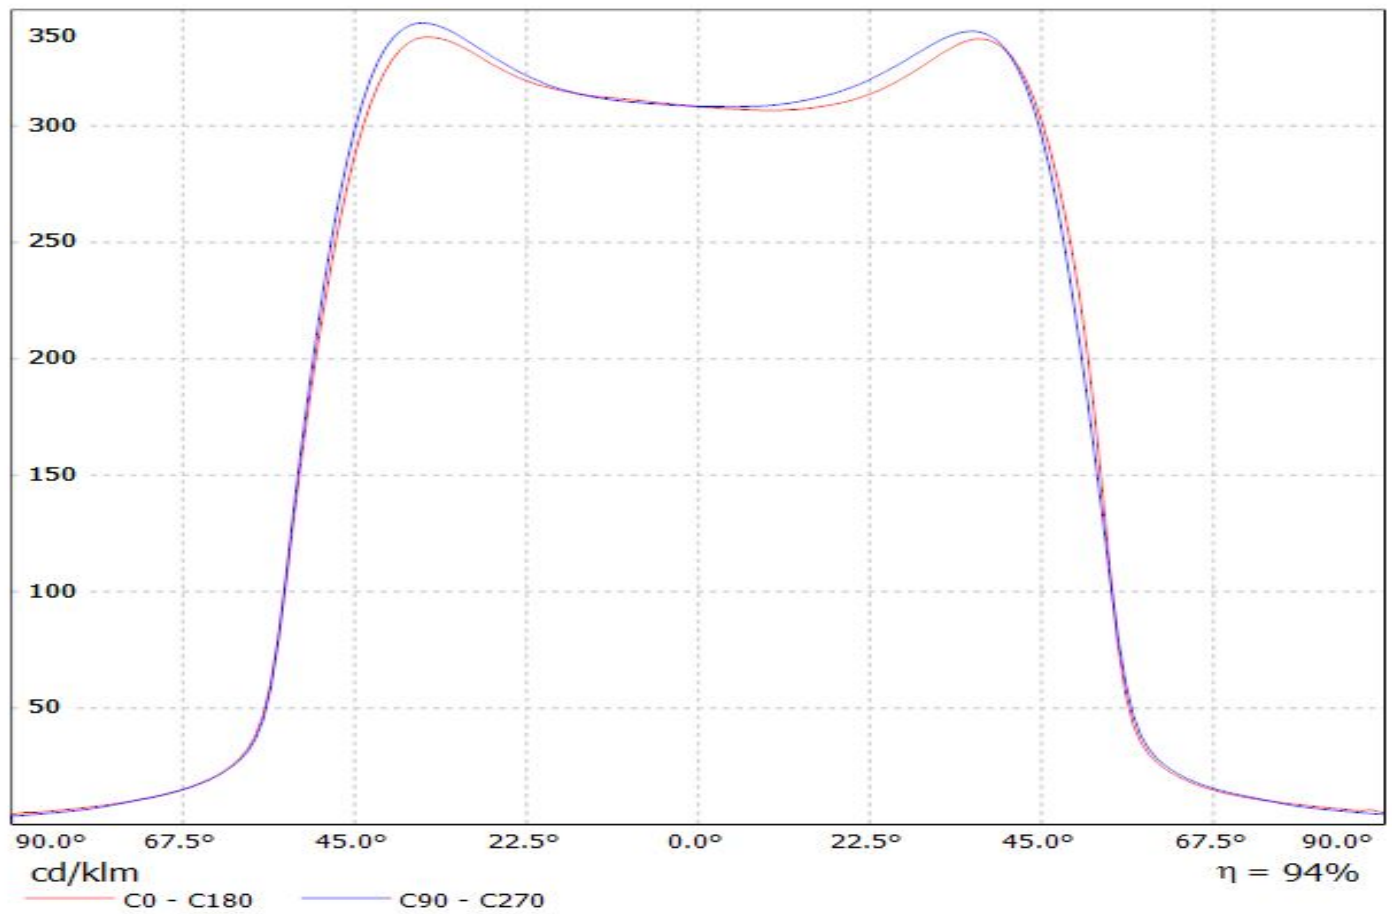


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(CXA1520)

Lamps: 1 x CREE_CXA1520_(CXA1520-30F-N4-N0H-0001)_976.326lm@250mA_U=8.36855W_I=249.8mA

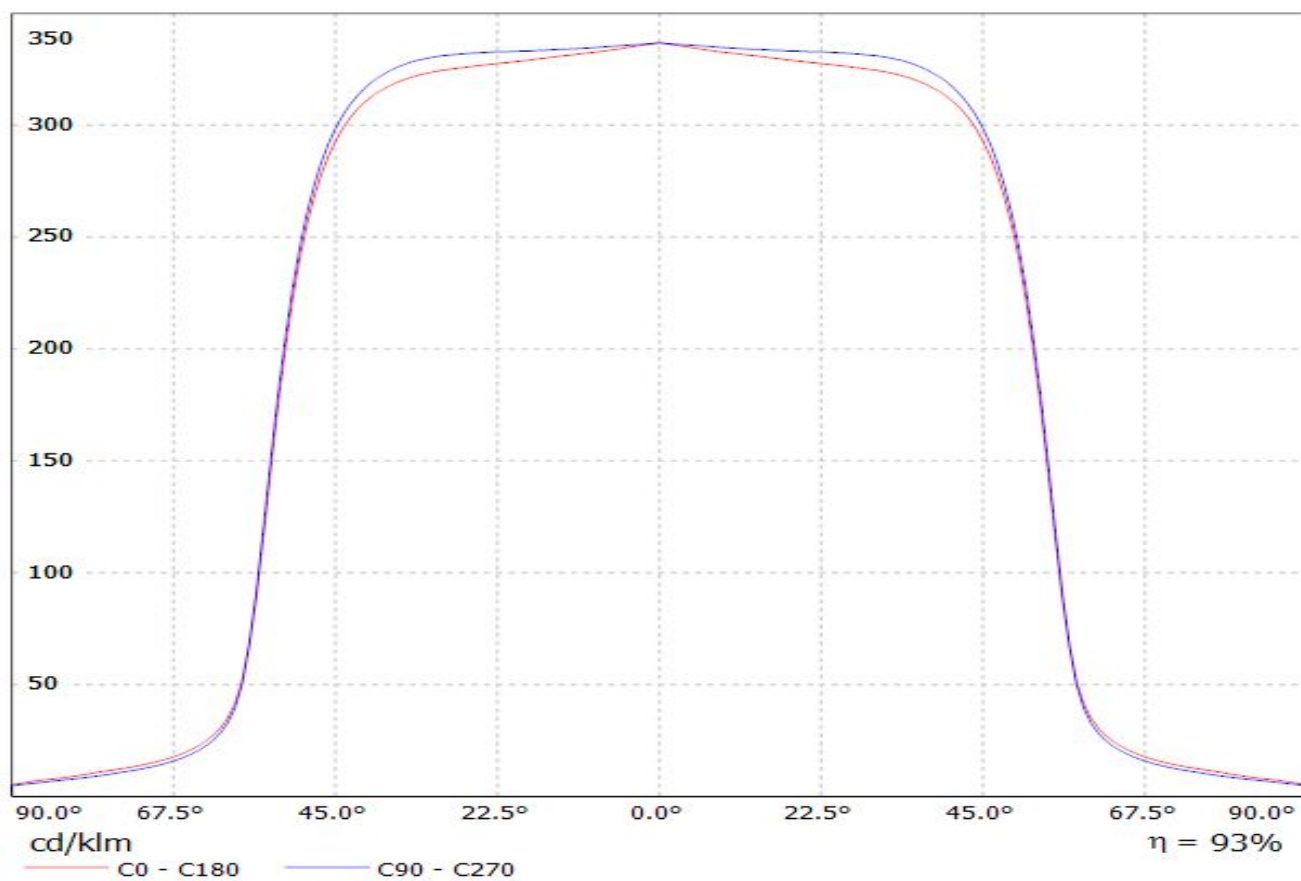


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(P9)

Lamps: 1 x OSRAM_SOLERIQ_P9_(GW_MAFJB1.EM)_7200lm@250mA_P=55W_I=249.8mA

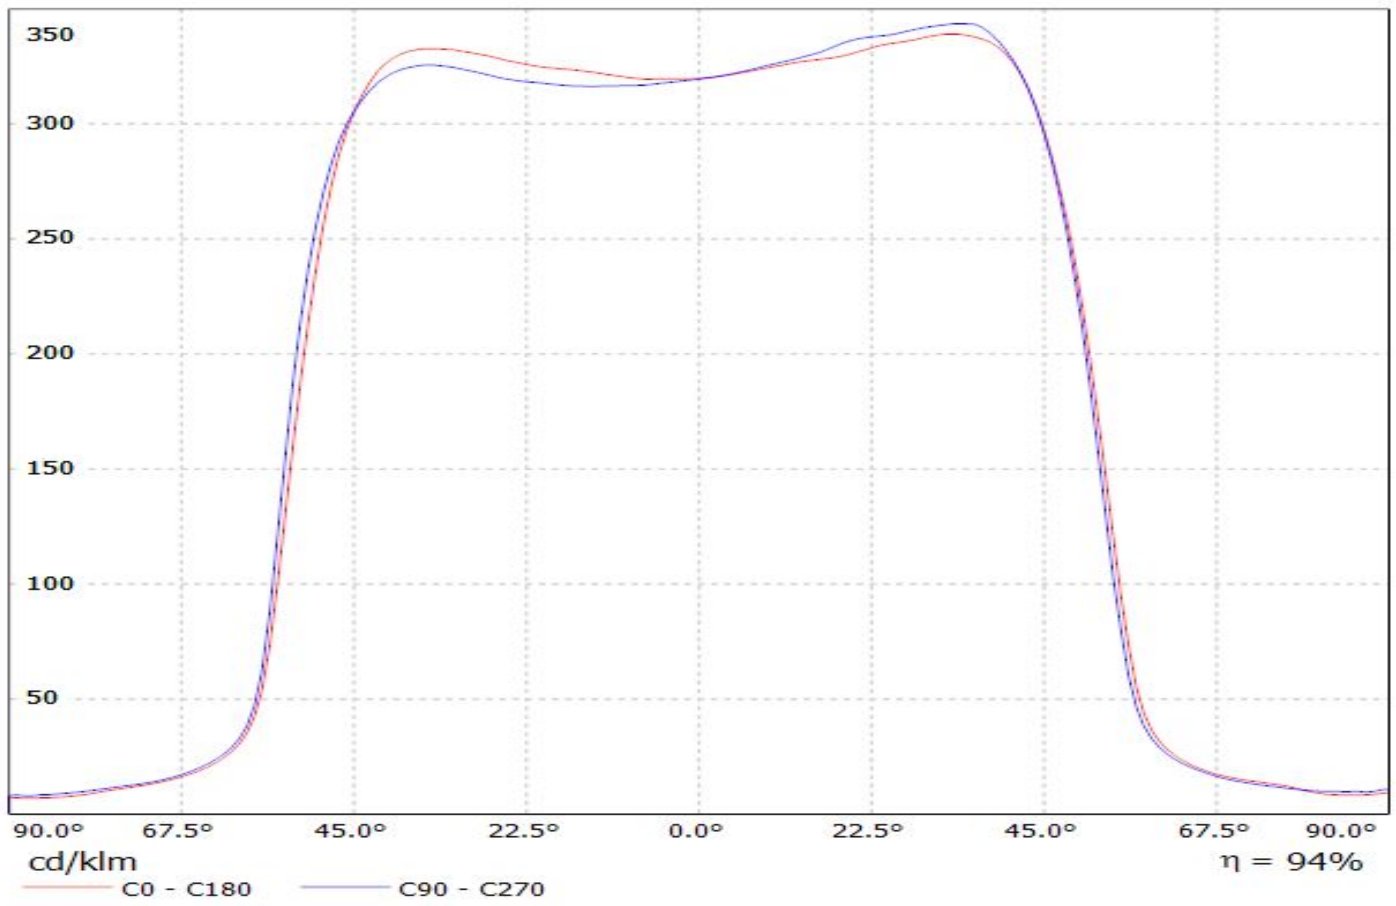


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(P6)

Lamps: 1 x OSRAM_SOLERIQ_P6_(GW_MAFJB1.EM)_5550lm@250mA_P=48W_I=249.9mA

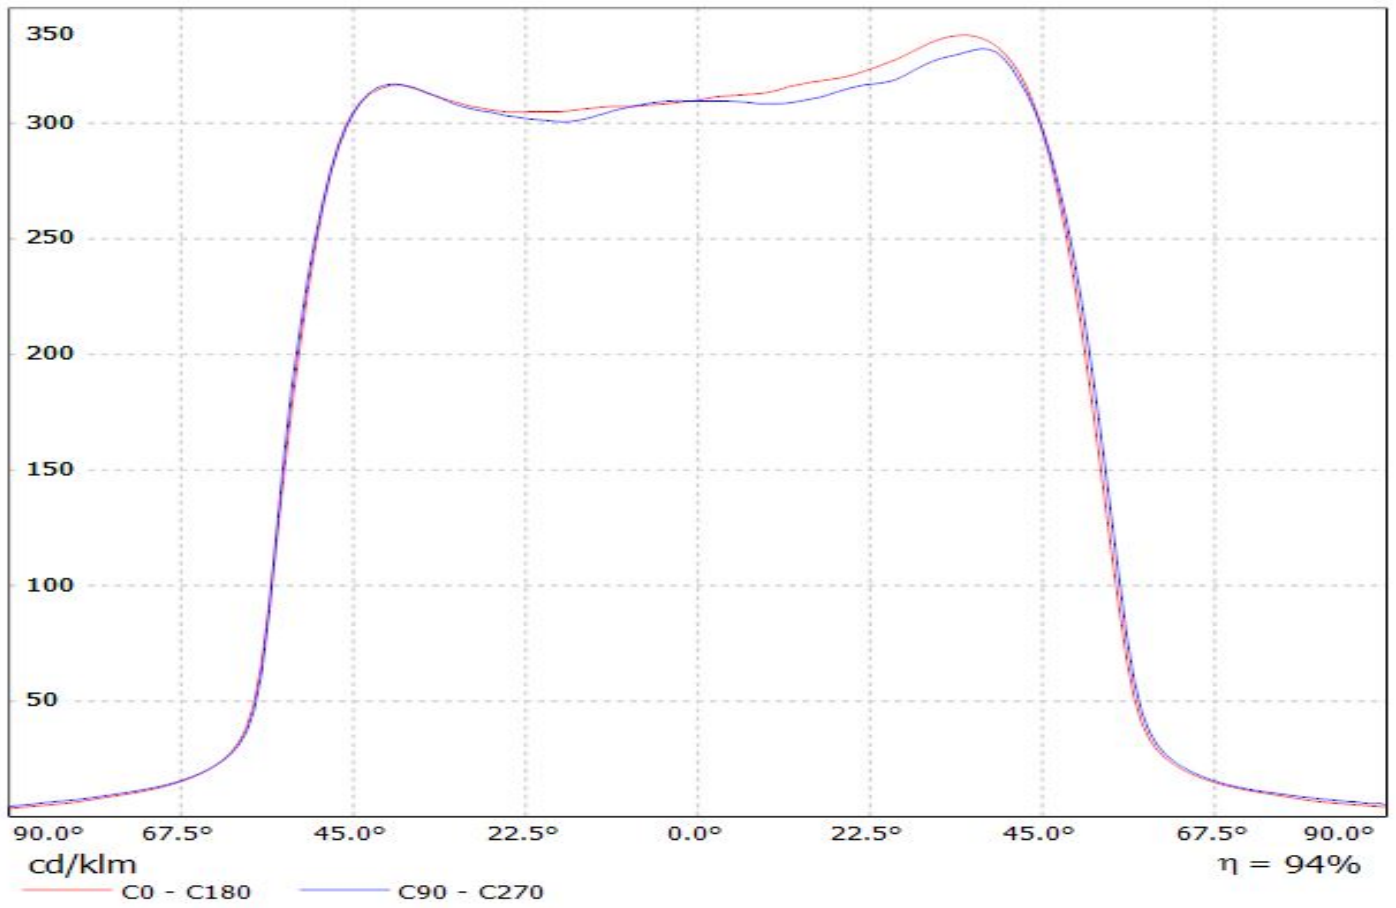


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(V6)
Lamps: 1 x BRIDGELUX_V6_3500lm@250mA_P=40W_I=249.9mA

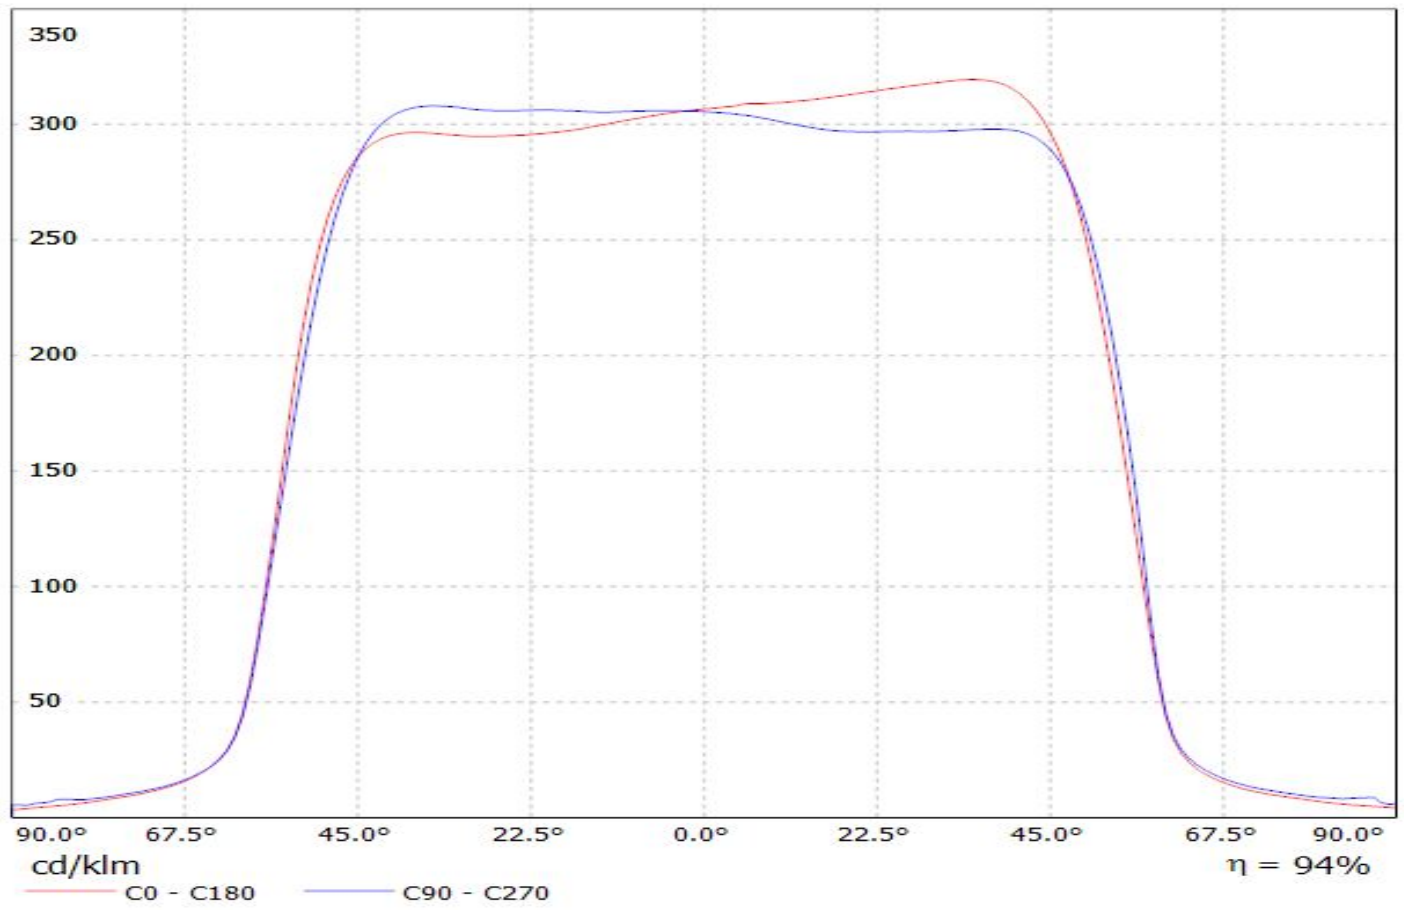

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(V10)

Lamps: 1 x BRIDGELUX_V10_(BXRE-30E1000B-X2)_6100lm@250mA_P=50W_I=249.9mA

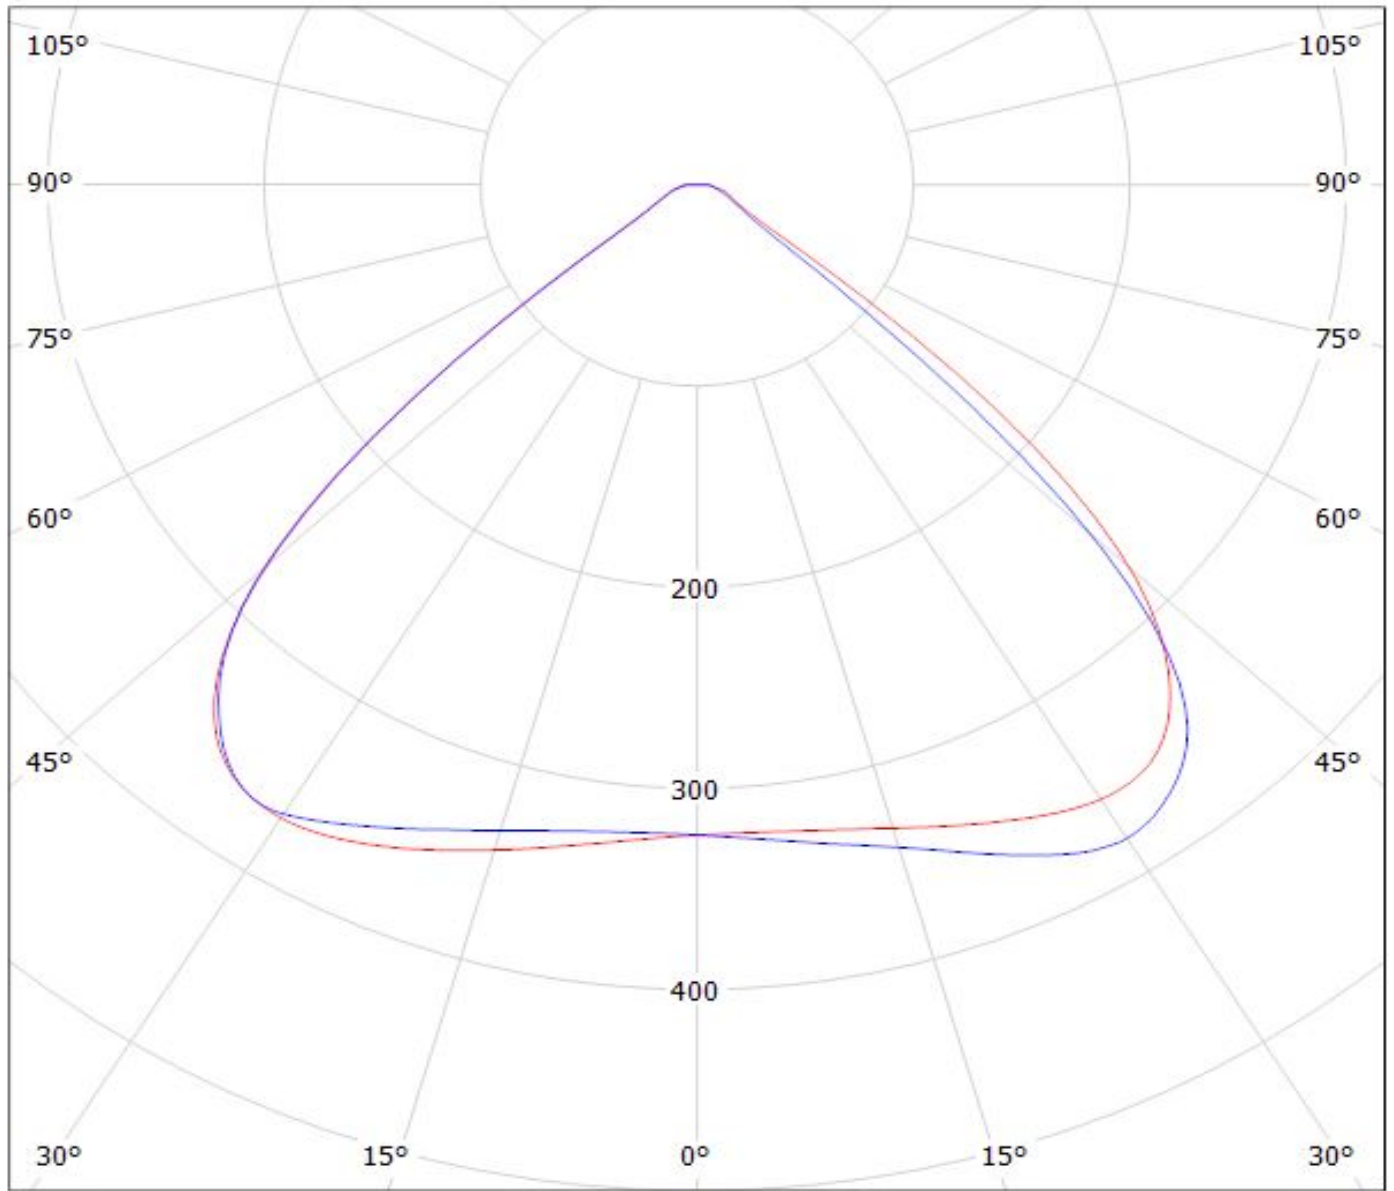


cd/klm

— C0 - C180

— C90 - C270

$\eta = 94\%$


Luminaire: Ledil F14325_JENNY-8X1-CY_(CLU700)
Lamps: 1 x Citizen_CLU700_394.637lm@100mA_P=2.8W_I=0.10A

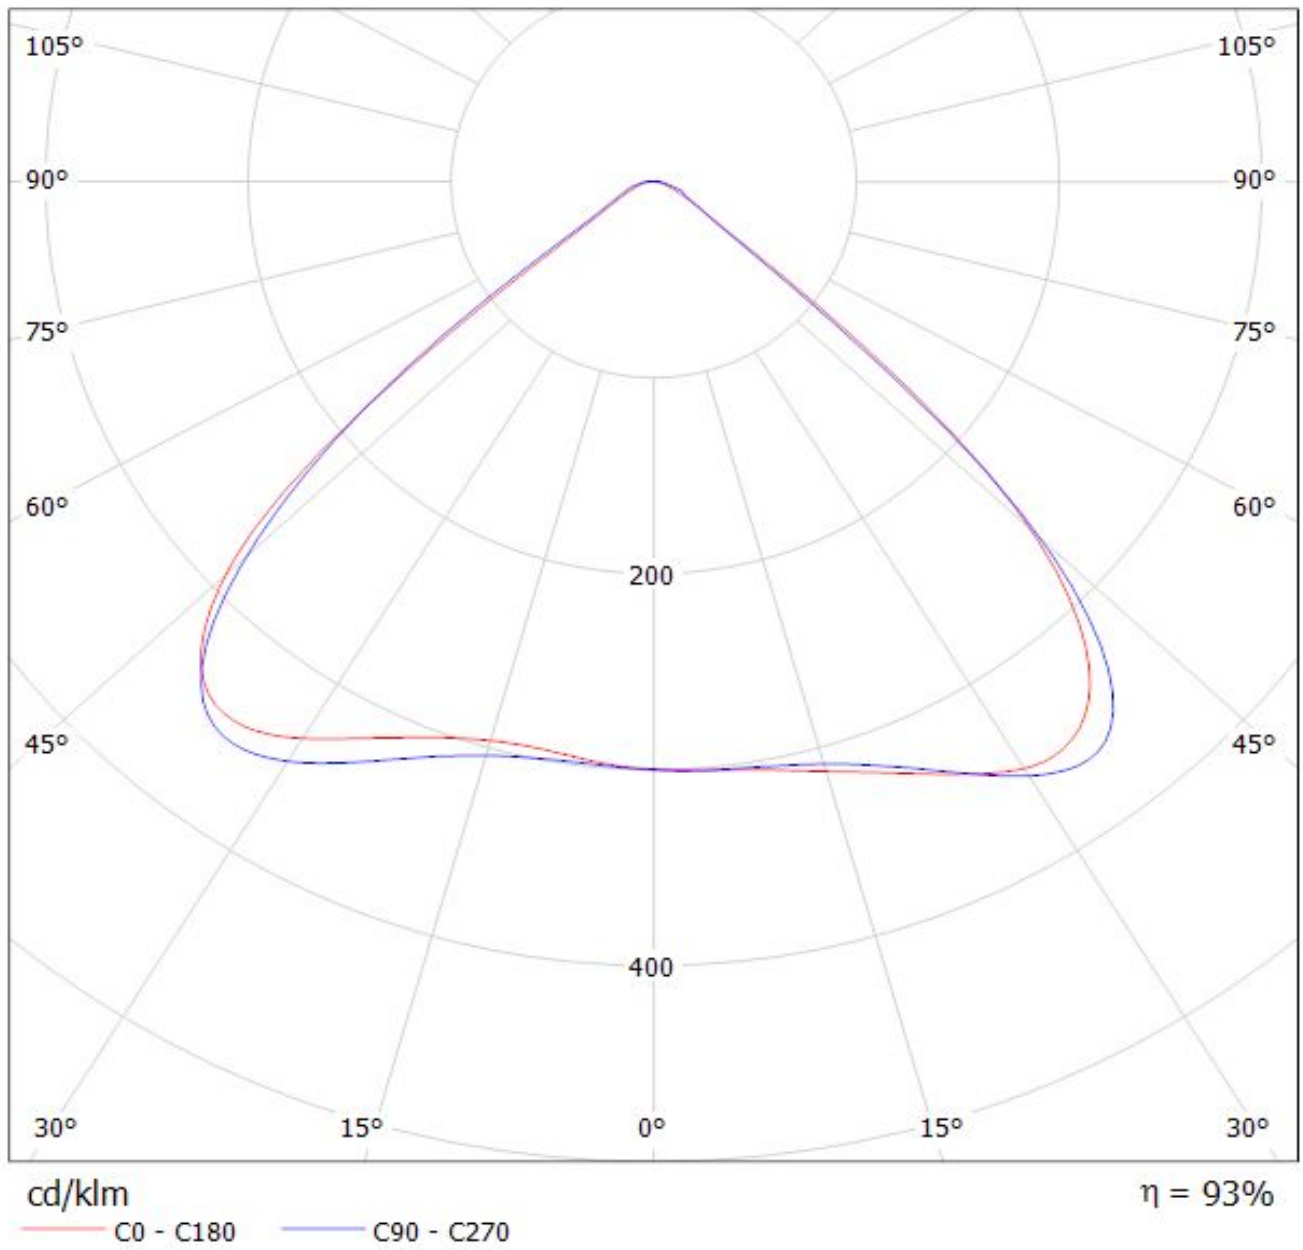

Ledil F14326_JENNY-8X1-T4_(Duris_S8) / LDC (Polar)

Luminaire: Ledil F14326_JENNY-8X1-T4_(Duris_S8)

Lamps: 1 x Osram_Duris_S8_(GW_P9LMS1.EC)_1611.928lm@800mA_CCT=2857K_P=14.4W_I=0.8A

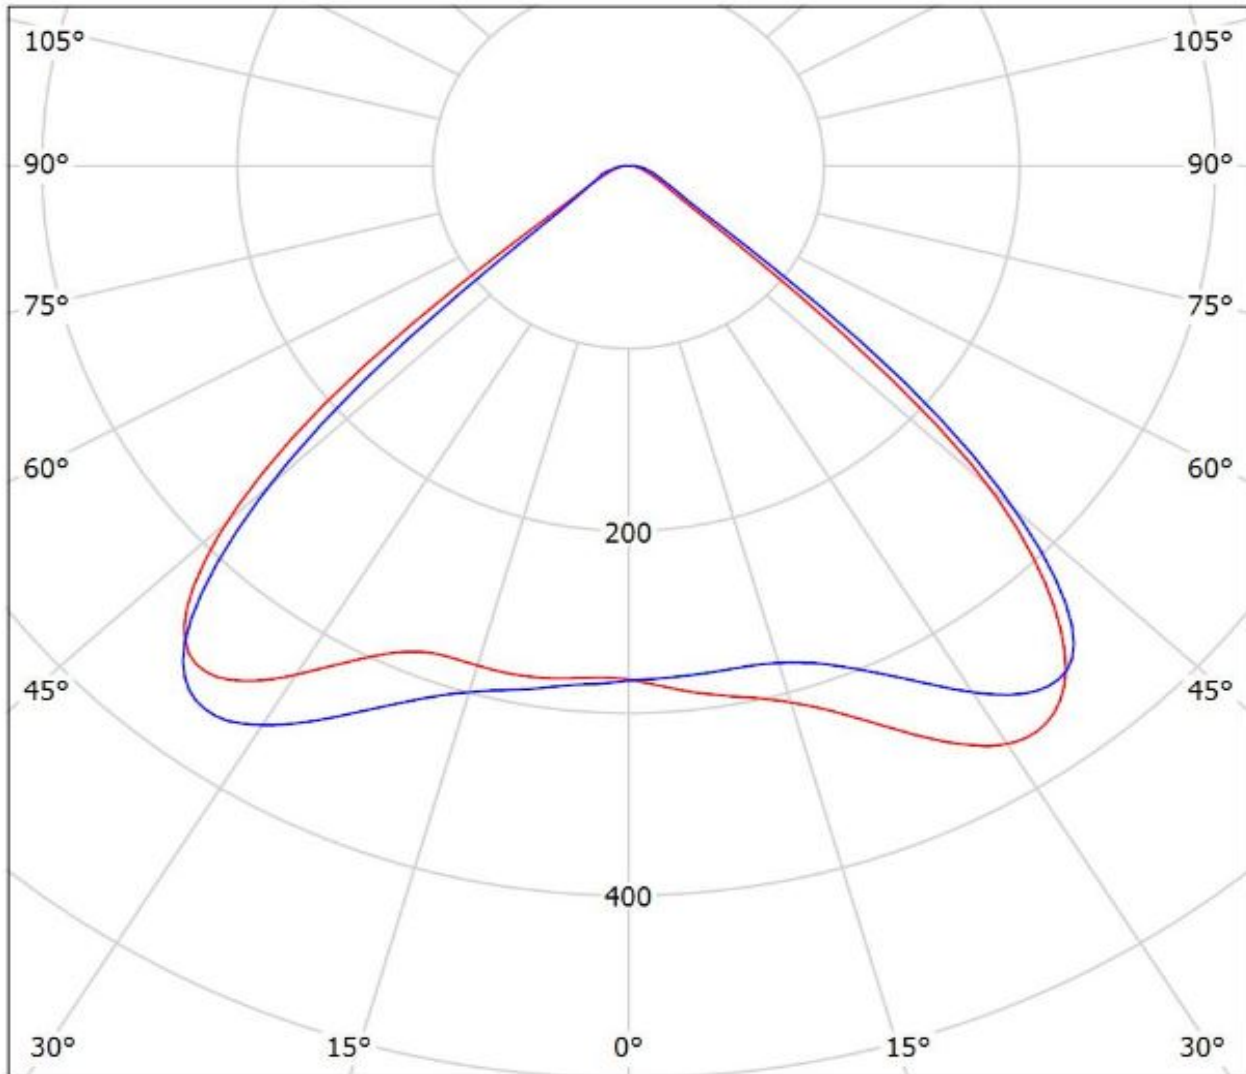


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(CLL022)

Lamps: 1 x CITIZEN_CLL022_x8_(CLL022-1204A5-030H7E1)_5900lm@250mA_P=69W_I=249.8mA

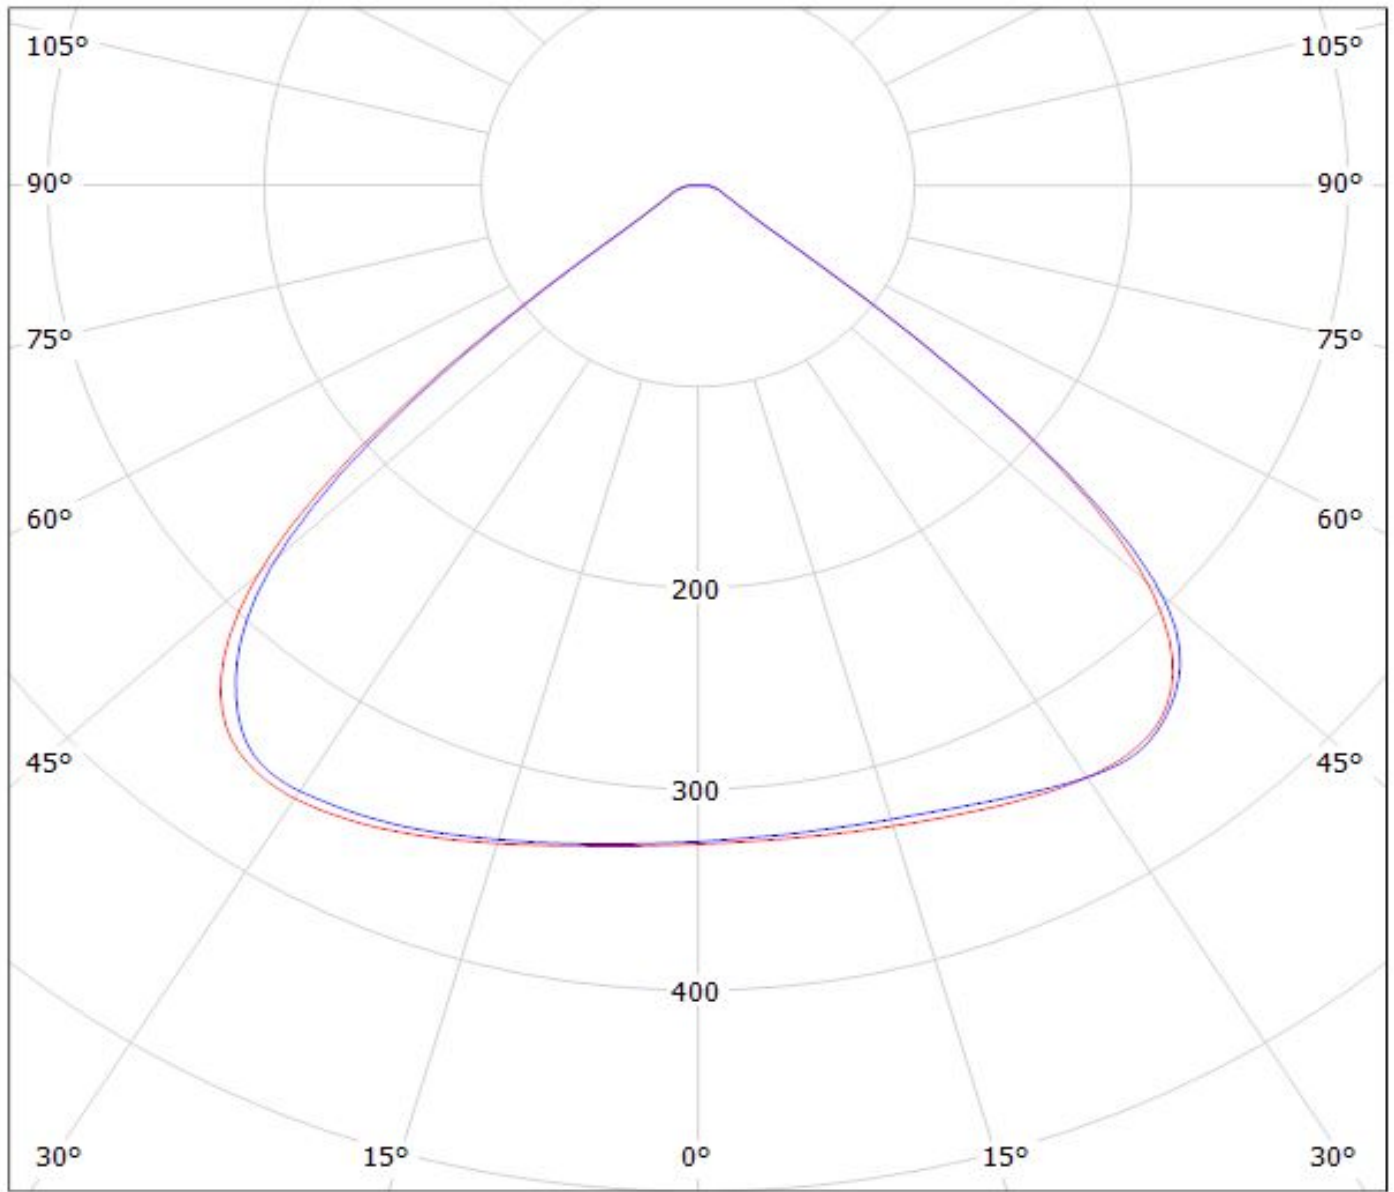


cd/klm

$\eta = 93\%$

— C0 - C180 — C90 - C270

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(XM-L)
Lamps: 1 x CREE_XM-L_EZW_1040lm@250mA_P=12W_I=249.9mA

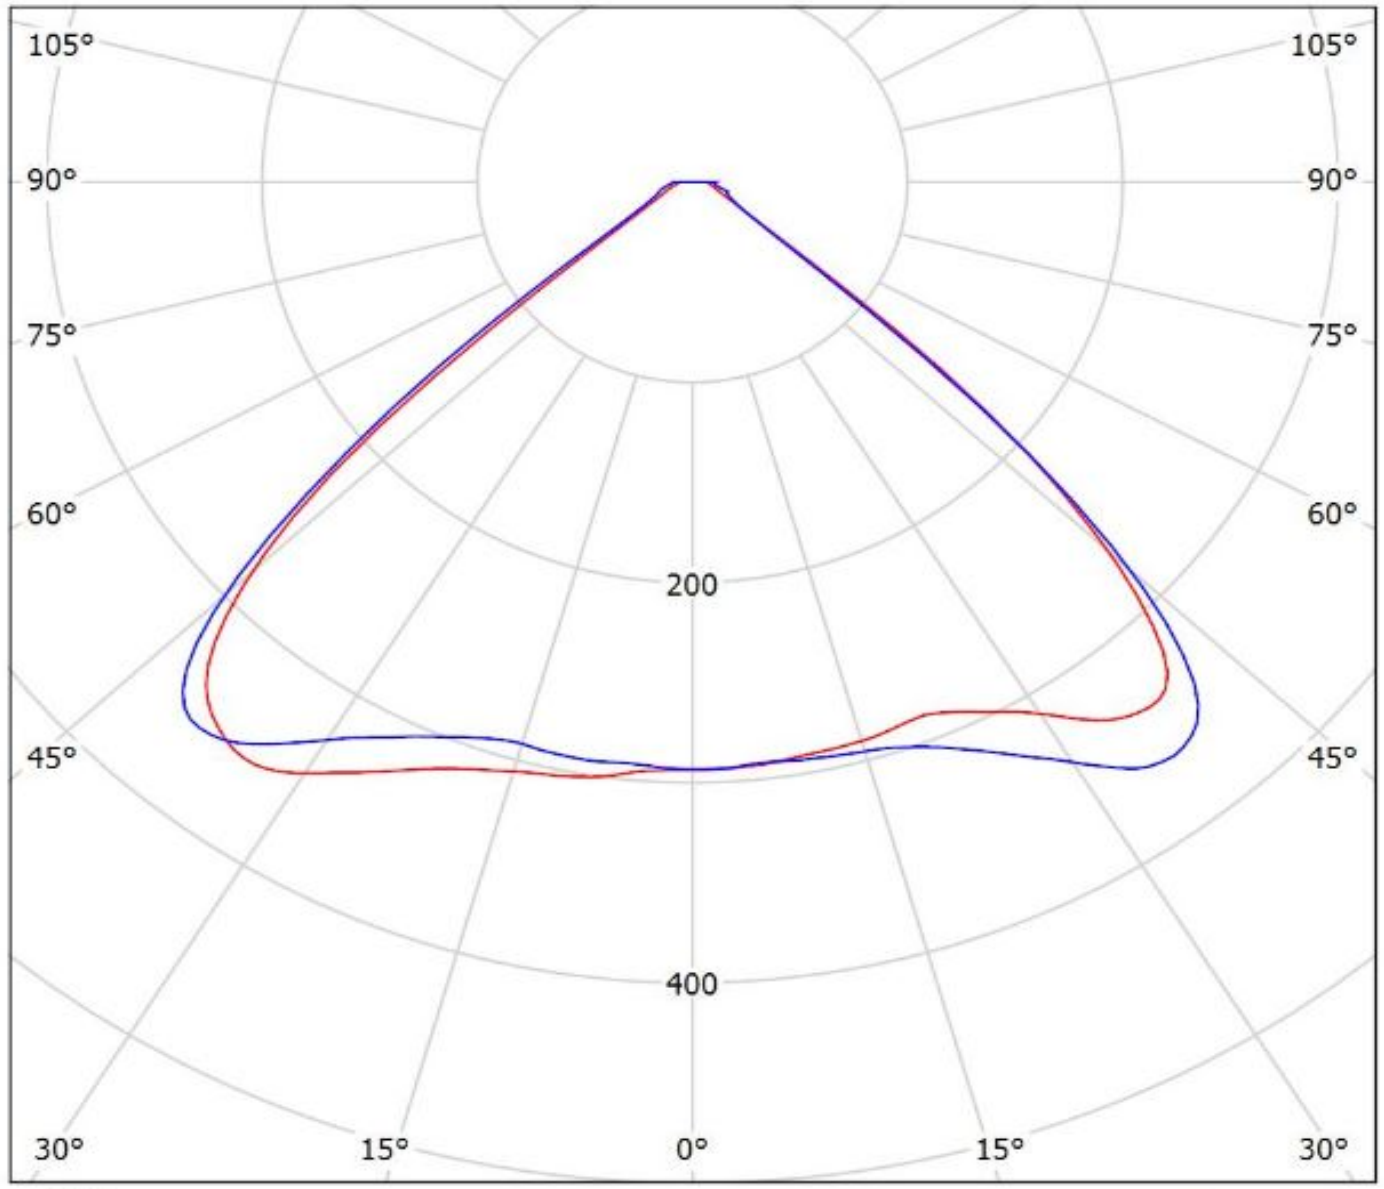


cd/klm
— C0 - C180 — C90 - C270

η = 94%

Ledil F14325_JENNY-8X1-CY_(LUXEON_5258) / LDC (Polar)

Luminaire: Ledil F14325_JENNY-8X1-CY_(LUXEON_5258)

Lamps: 1 x LUXEON_5258_(24VOLTS)_2460.584lm@800mA_CCT=2700K_P=18.592W_I=0.8A

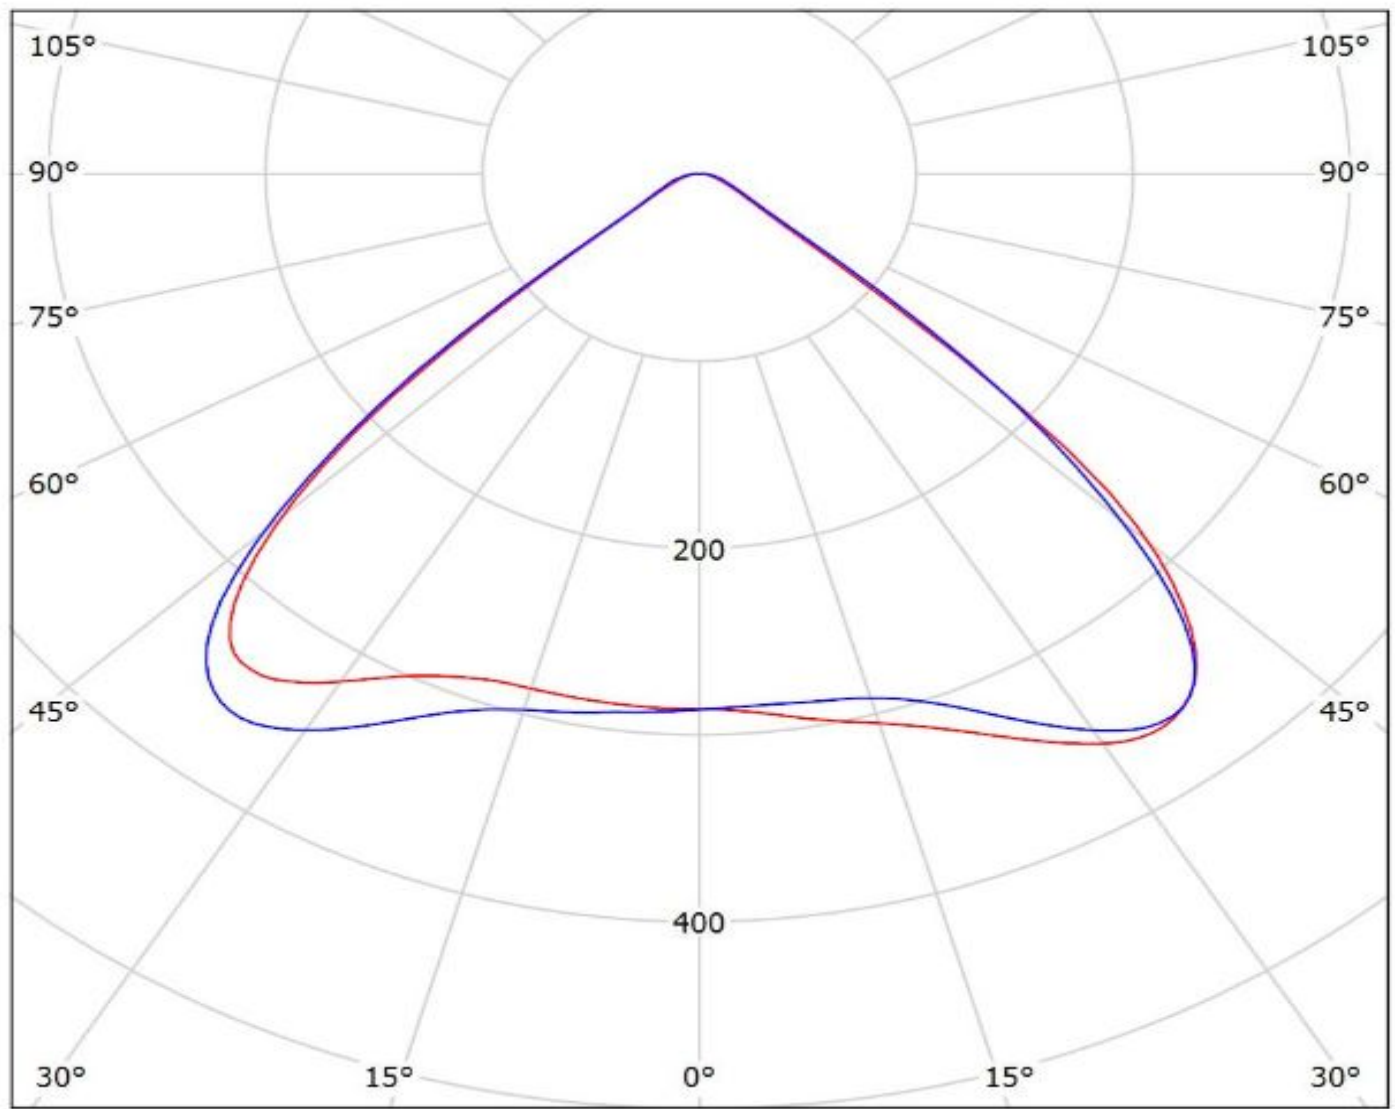


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(LUXEON_M)
Lamps: 1 x LUXEON_M_(LXR7-SW40)_2540lm@250mA_P=21W_I=249.8mA

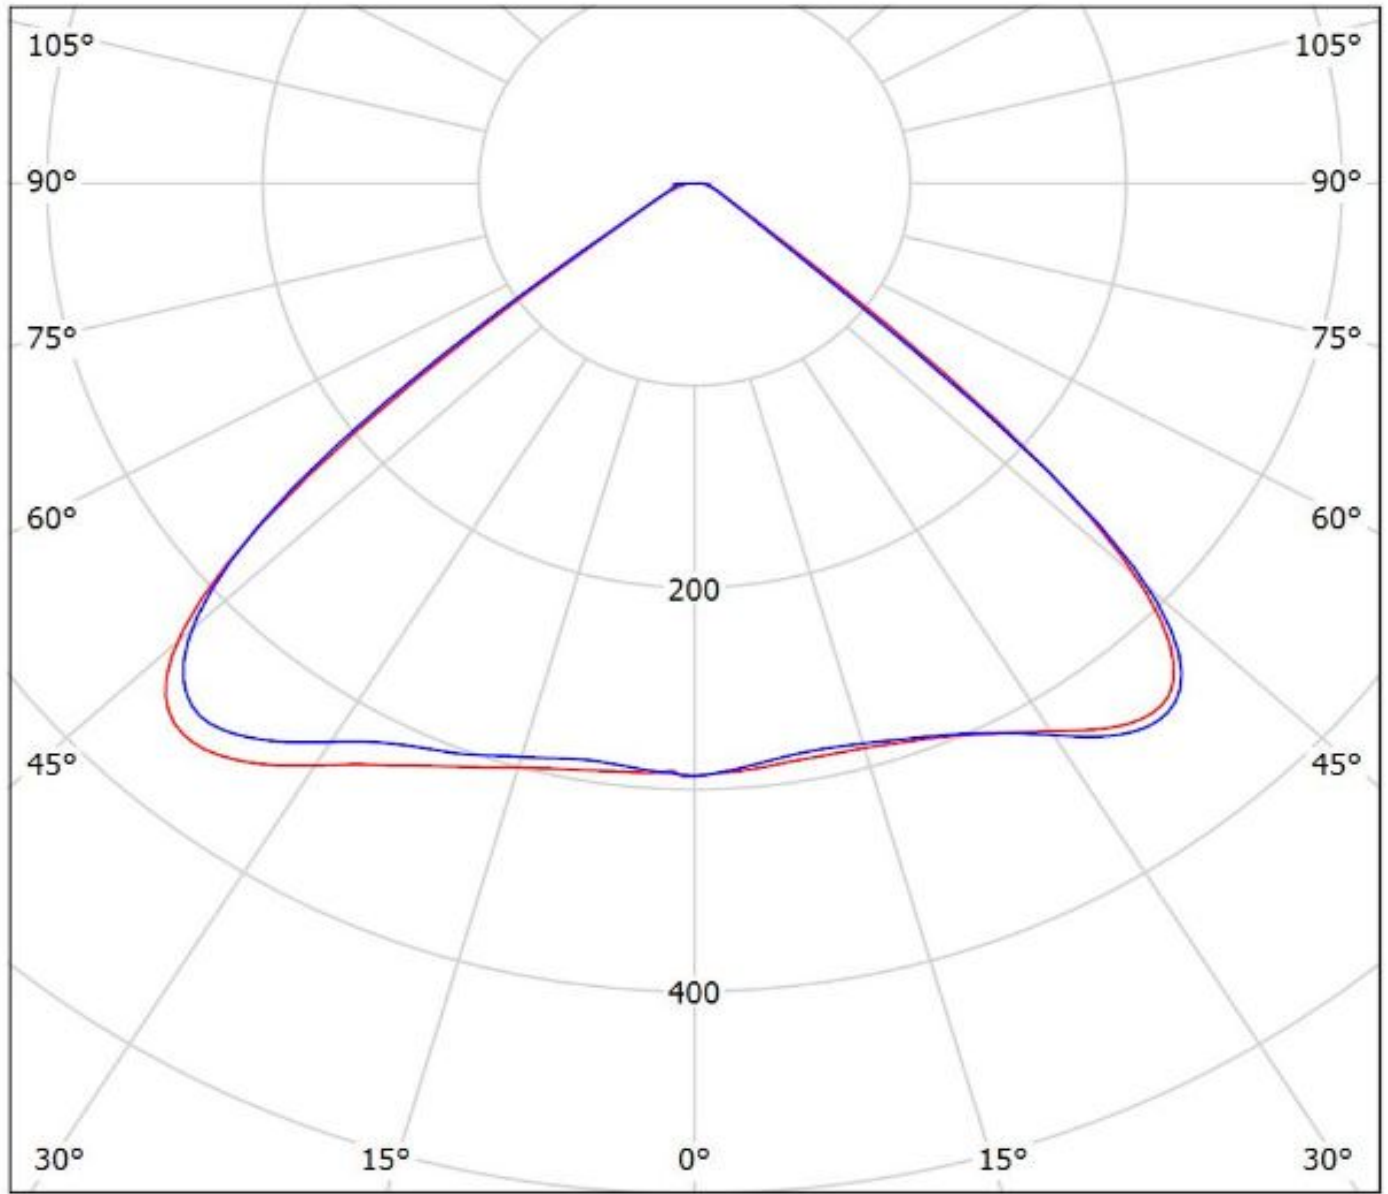


cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy F14531_JENNY-CY_(CLL010)

Lamps: 1 x CITIZEN_CLL010_x8_(CLL010-0305A1-303M1A2)_1658.8lm@250mA_P=18W_I=249.9mA

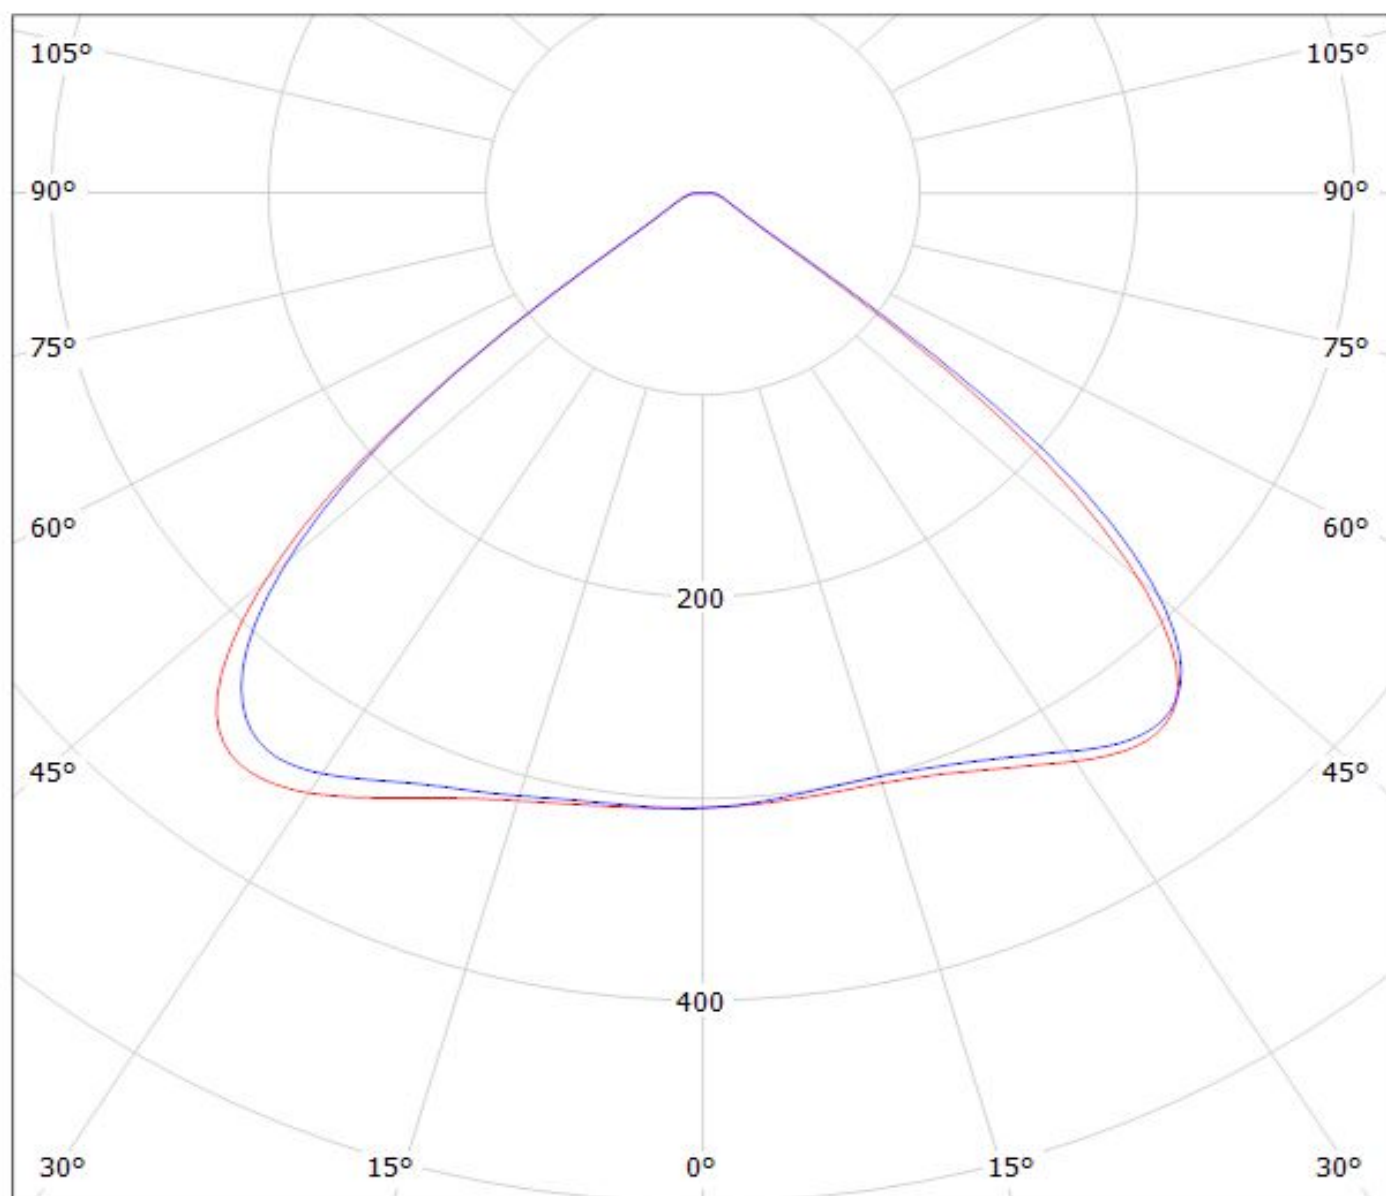

cd/klm

— C0 - C180


— C90 - C270

$\eta = 94\%$


Ledil F14325_JENNY-8X1-CY_(XPH50) / LDC (Polar)

Luminaire: Ledil F14325_JENNY-8X1-CY_(XPH50)

Lamps: 1 x XHP50_warm_white_1686.8lm@250mA_P=11.2166W_I=0.25A

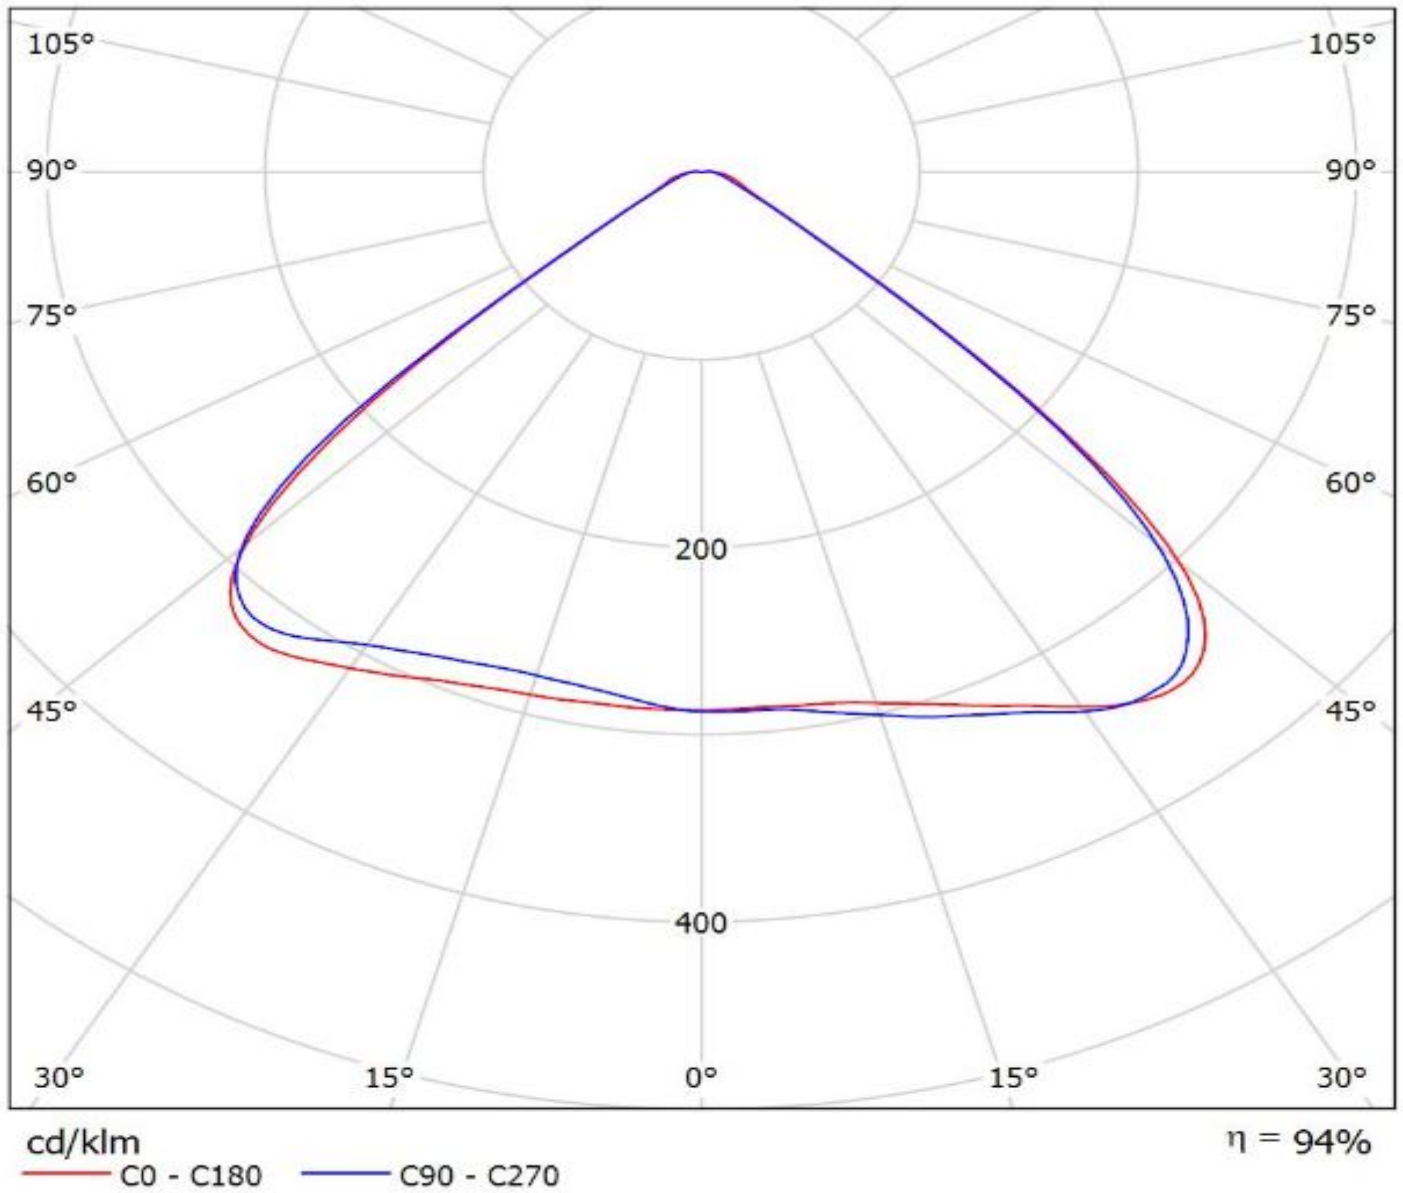


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(MK-R)
Lamps: 1 x MK-R_2820lm@250mA_CCT=3276K_P=22W_I=249.9mA

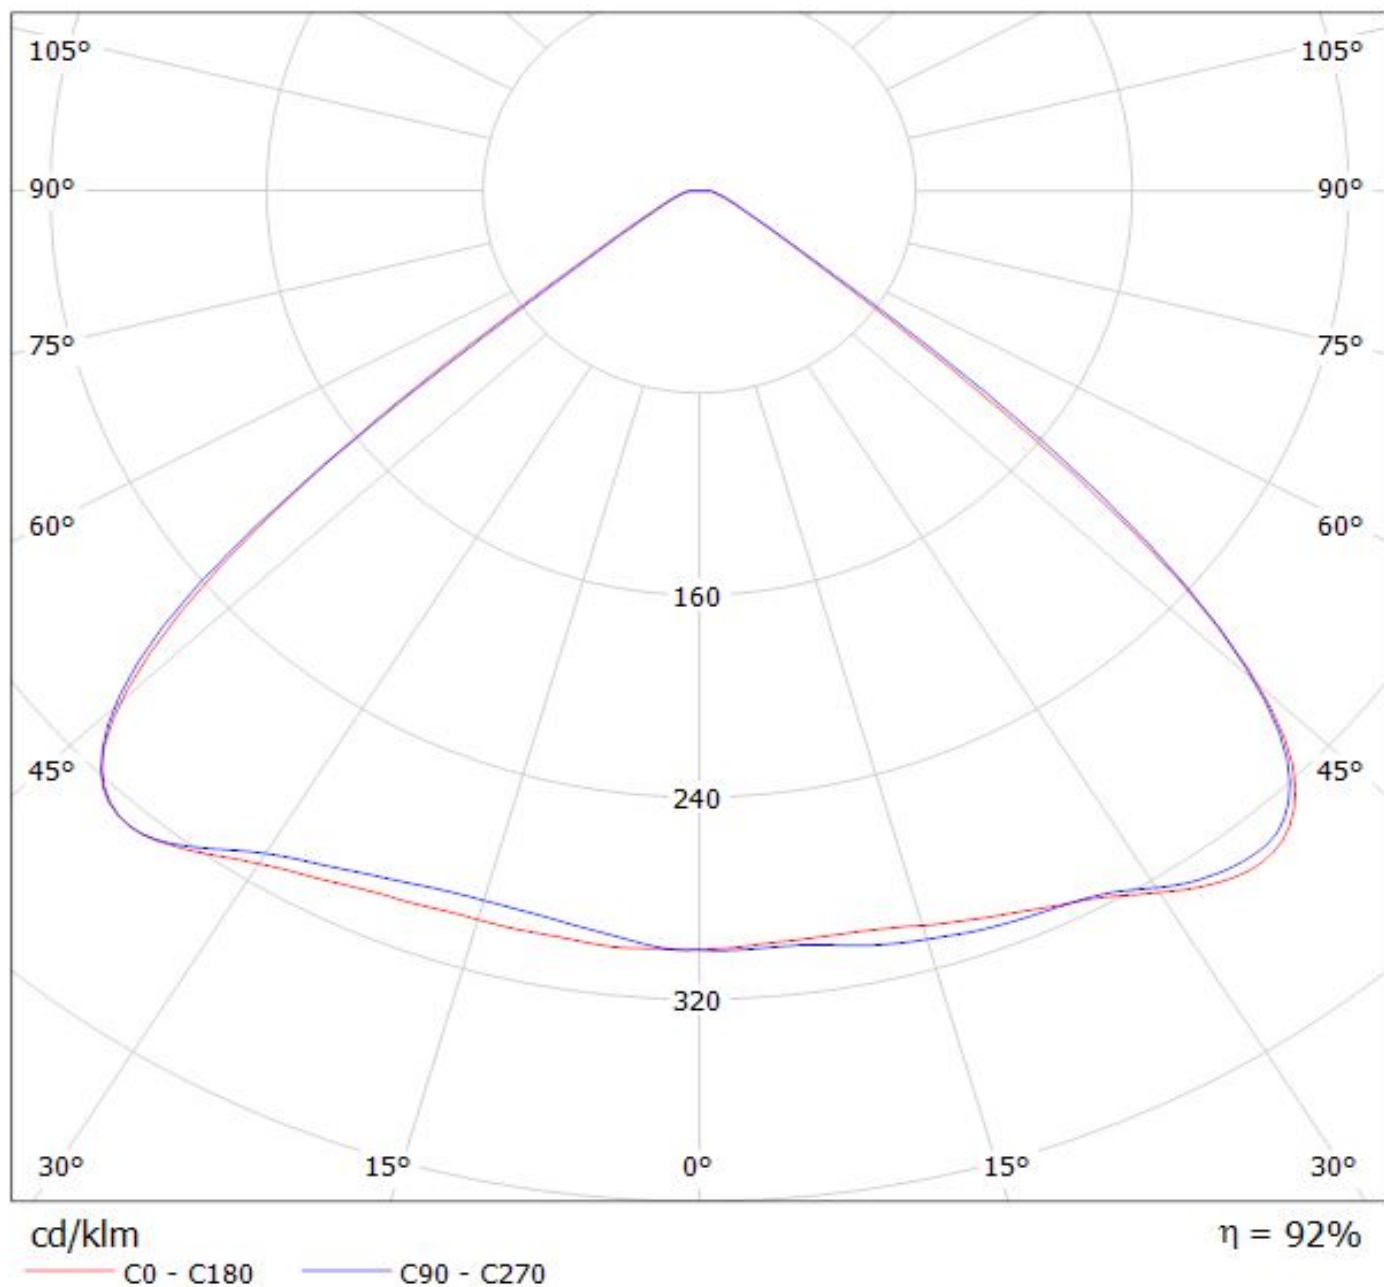

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY

Lamps: 1 x BRIDGELUX_V8_6900lm@250mA_P=70W_I=249.8mA

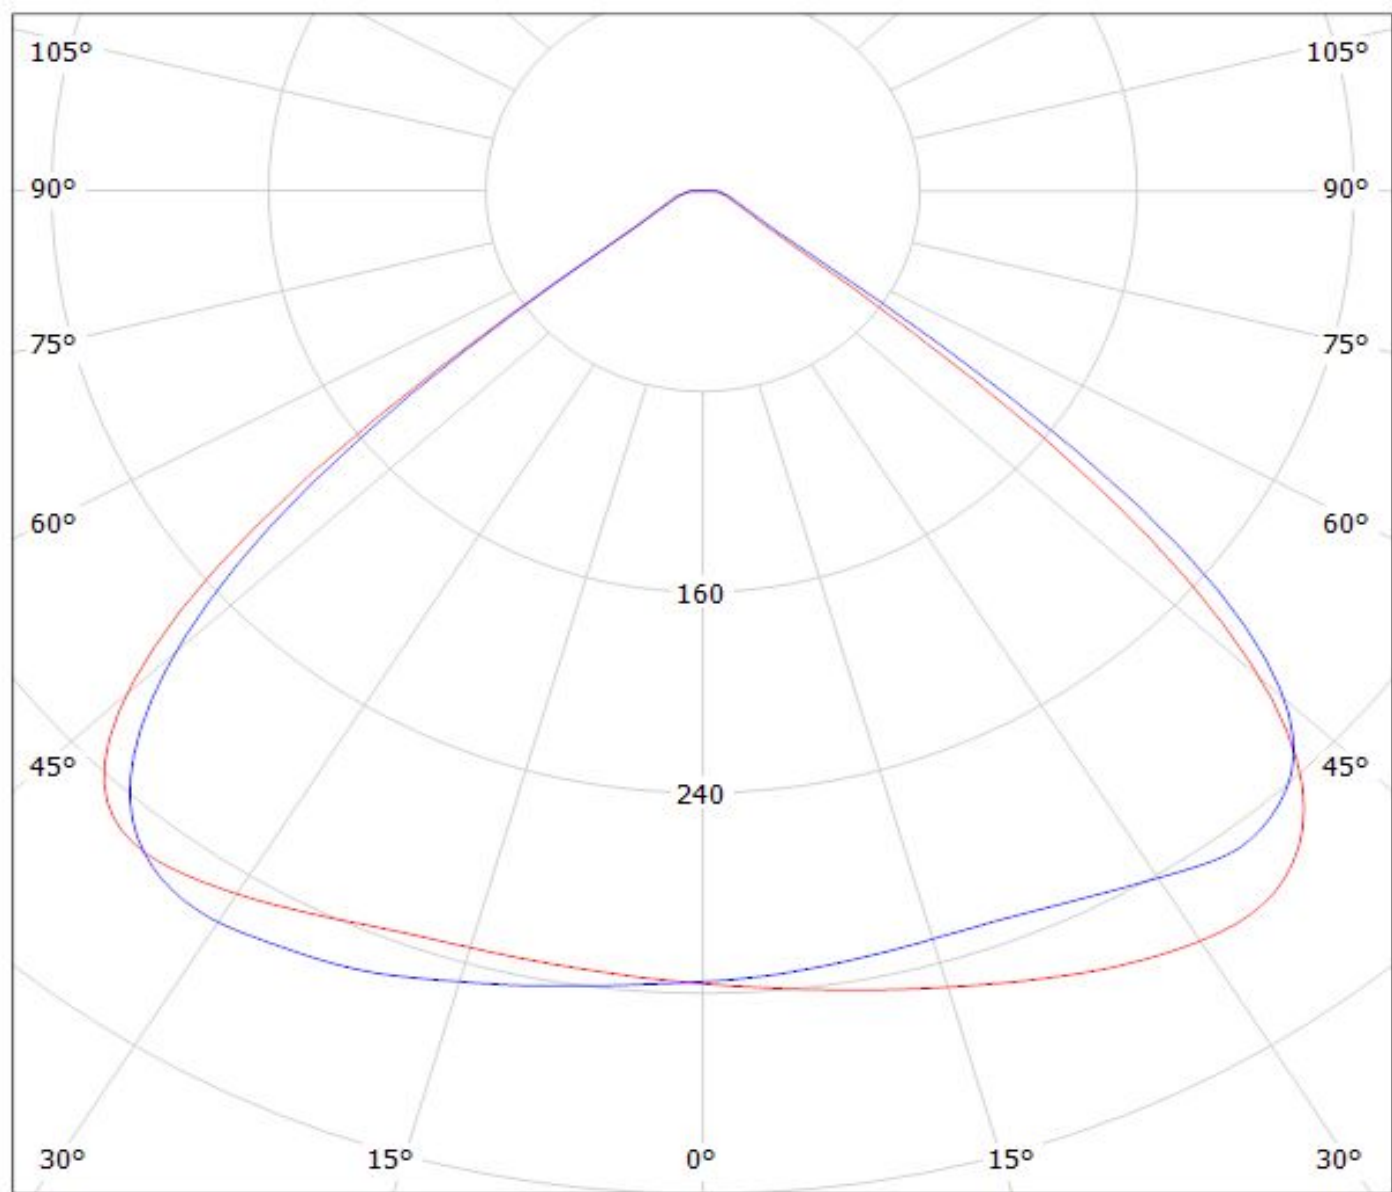


cd/klm

— C0 - C180

— C90 - C270


$\eta = 94\%$

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(CXA1310)
Lamps: 1 x CREE_CXA1310_(CXA1310-30H-G4-F0Y-00001)
_2900lm@250mA_CCT=3000K_P=34W_I=249.8mA

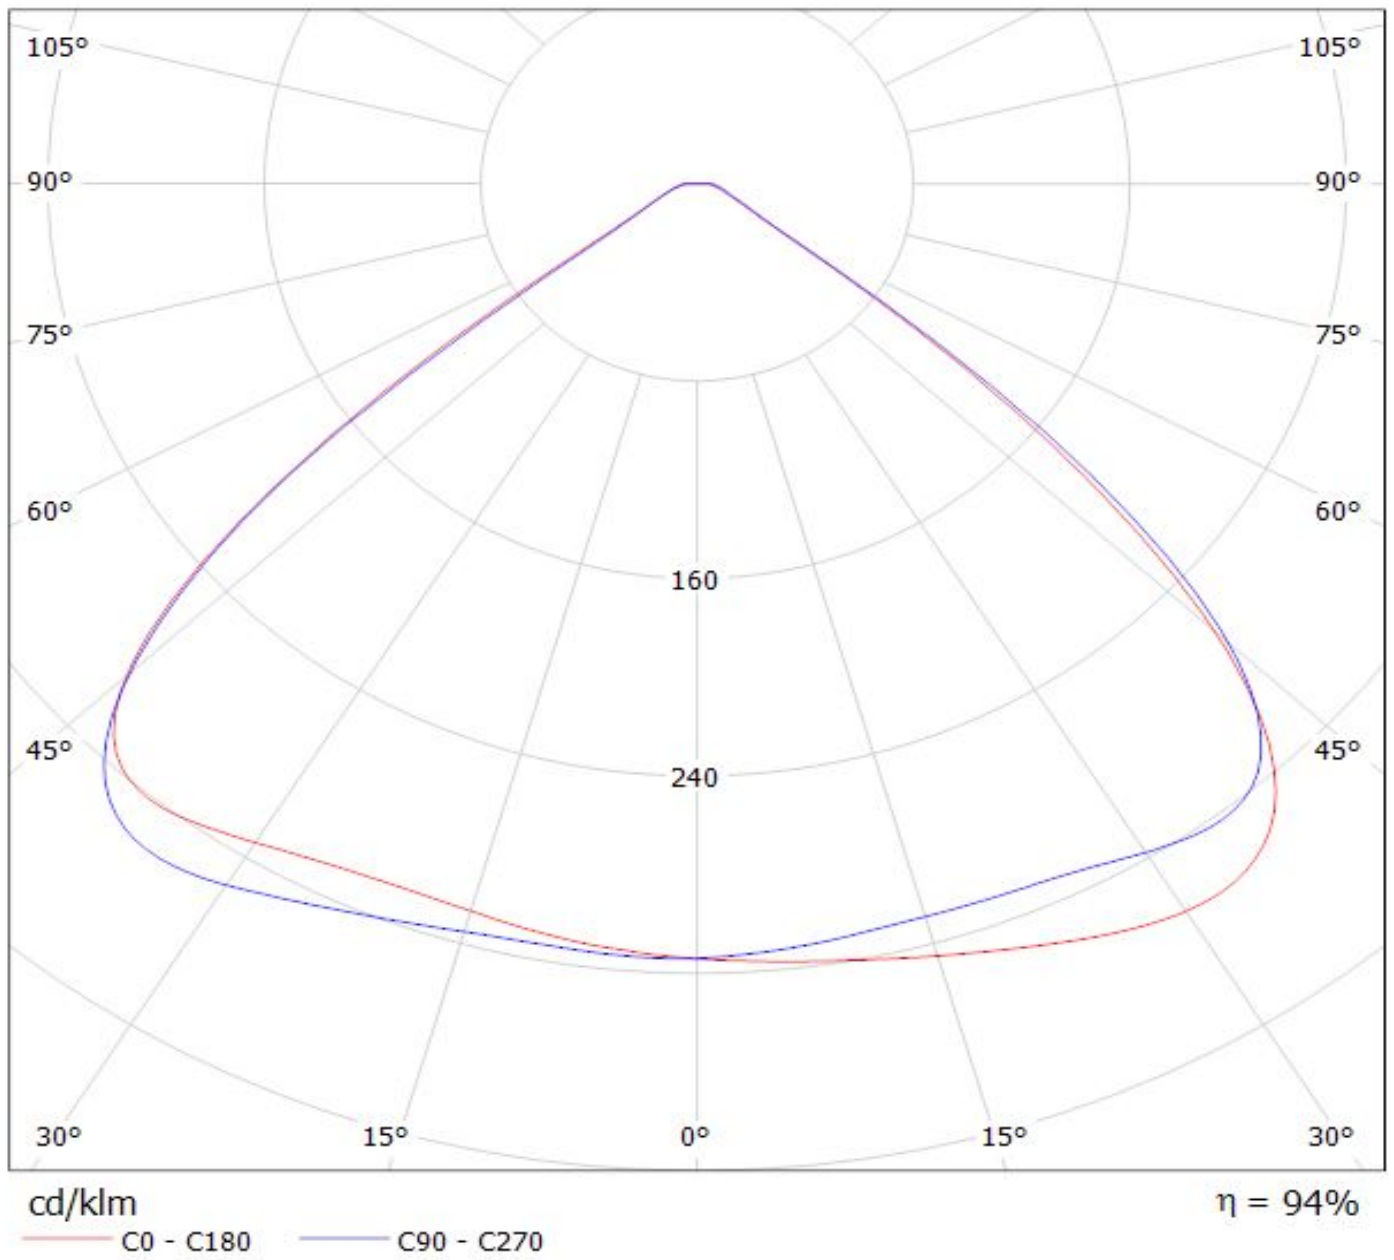

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(NSMx286M)

Lamps: 1 x NICHIA_NSMx286M_(NSML286ME)_2680lm@100mA_P=27W_I=100.1mA

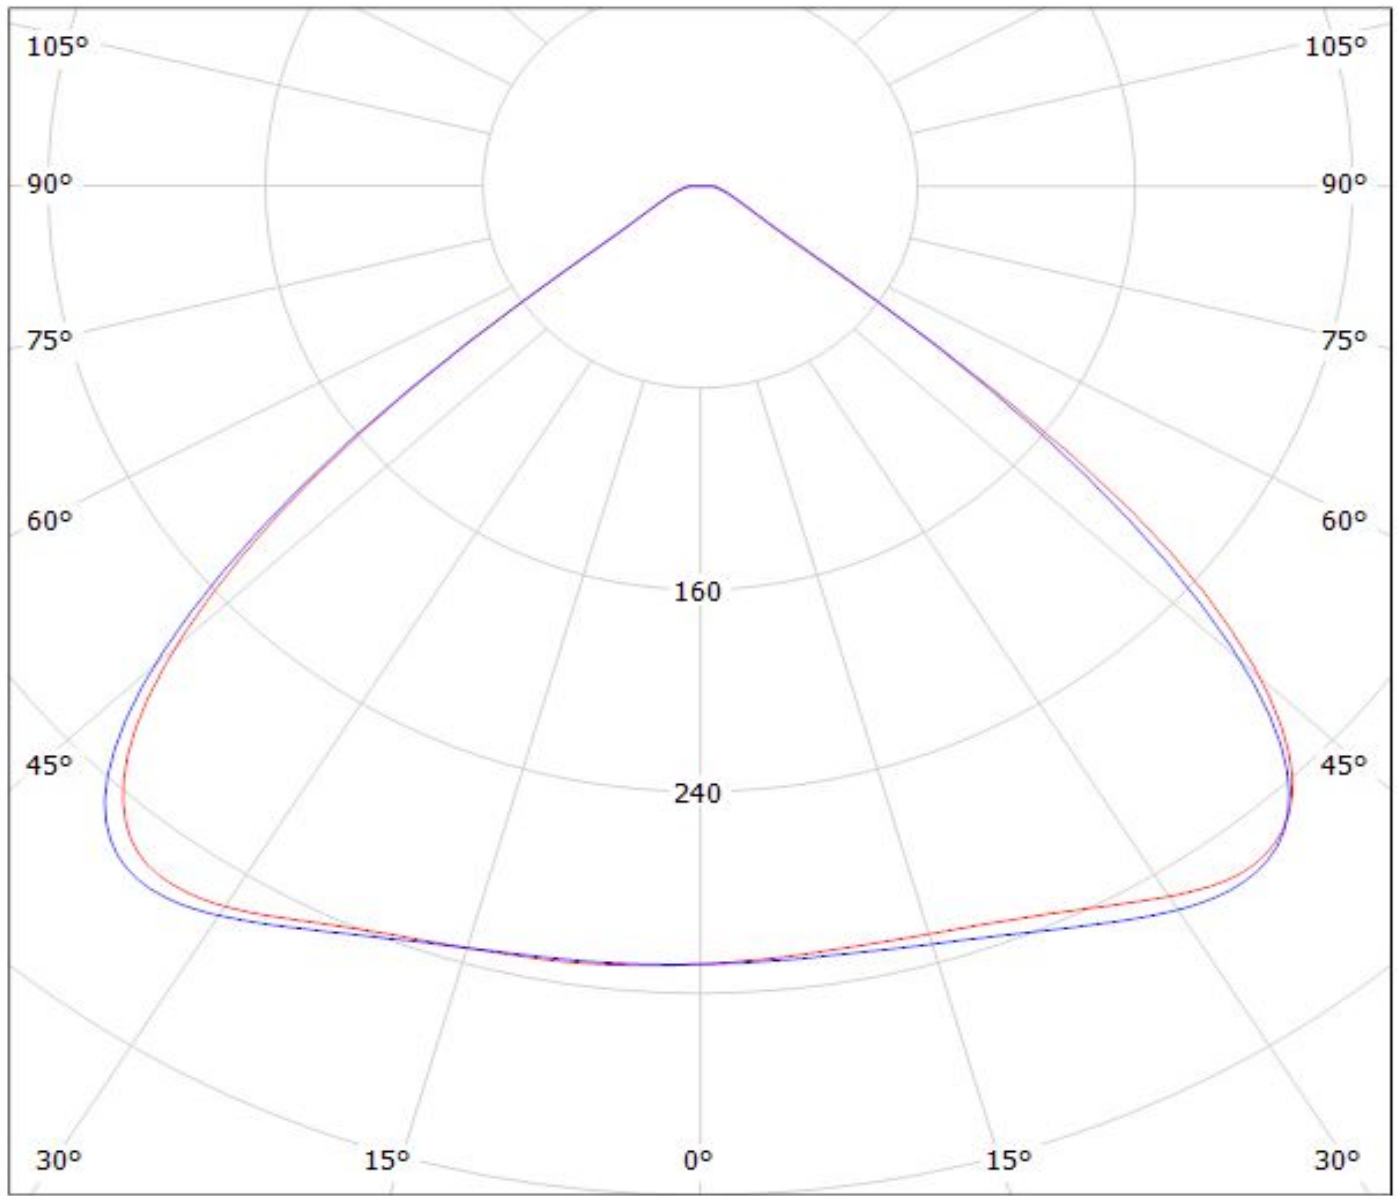

cd/klm


— C0 - C180

— C90 - C270

η = 94%


Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(CXA1520)

Lamps: 1 x CREE_CXA1520_(CXA1520-30F-N4-N0H-0001)_976.326lm@250mA_U=8.36855W_I=249.8mA

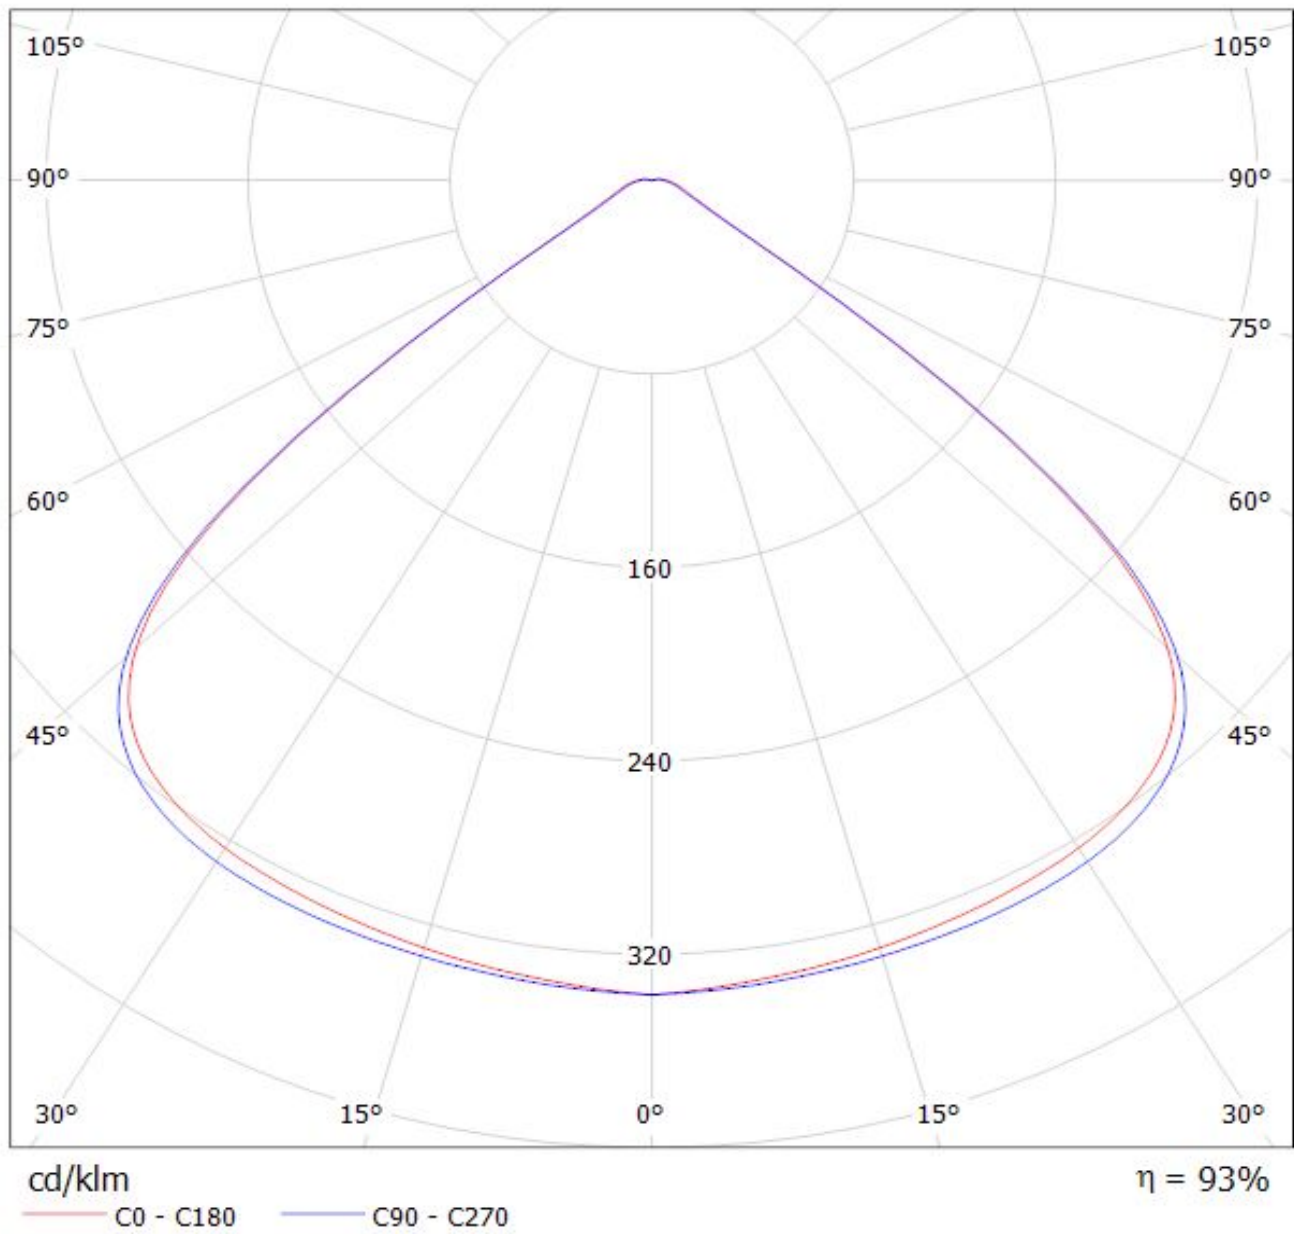

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(P9)

Lamps: 1 x OSRAM_SOLERIQ_P9_(GW_MAFJB1.EM)_7200lm@250mA_P=55W_I=249.8mA

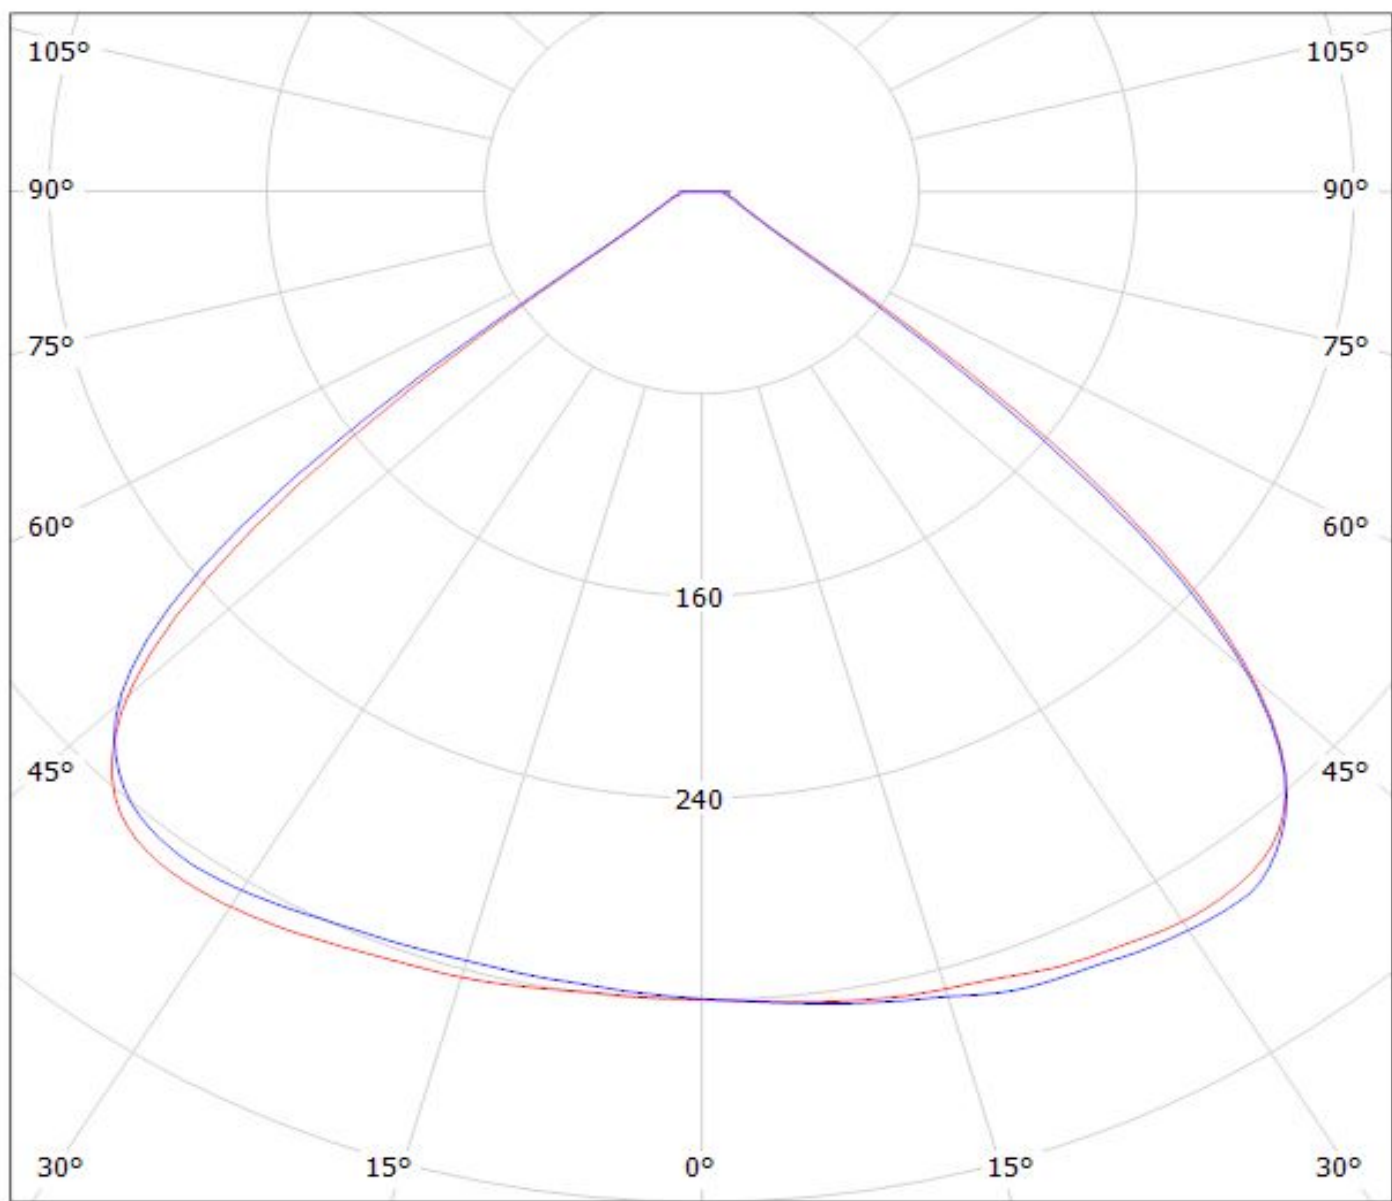

cd/klm


— C0 - C180

— C90 - C270

$\eta = 94\%$

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(P6)

Lamps: 1 x OSRAM_SOLERIQ_P6_(GW_MAFJB1.EM)_5550lm@250mA_P=48W_I=249.9mA

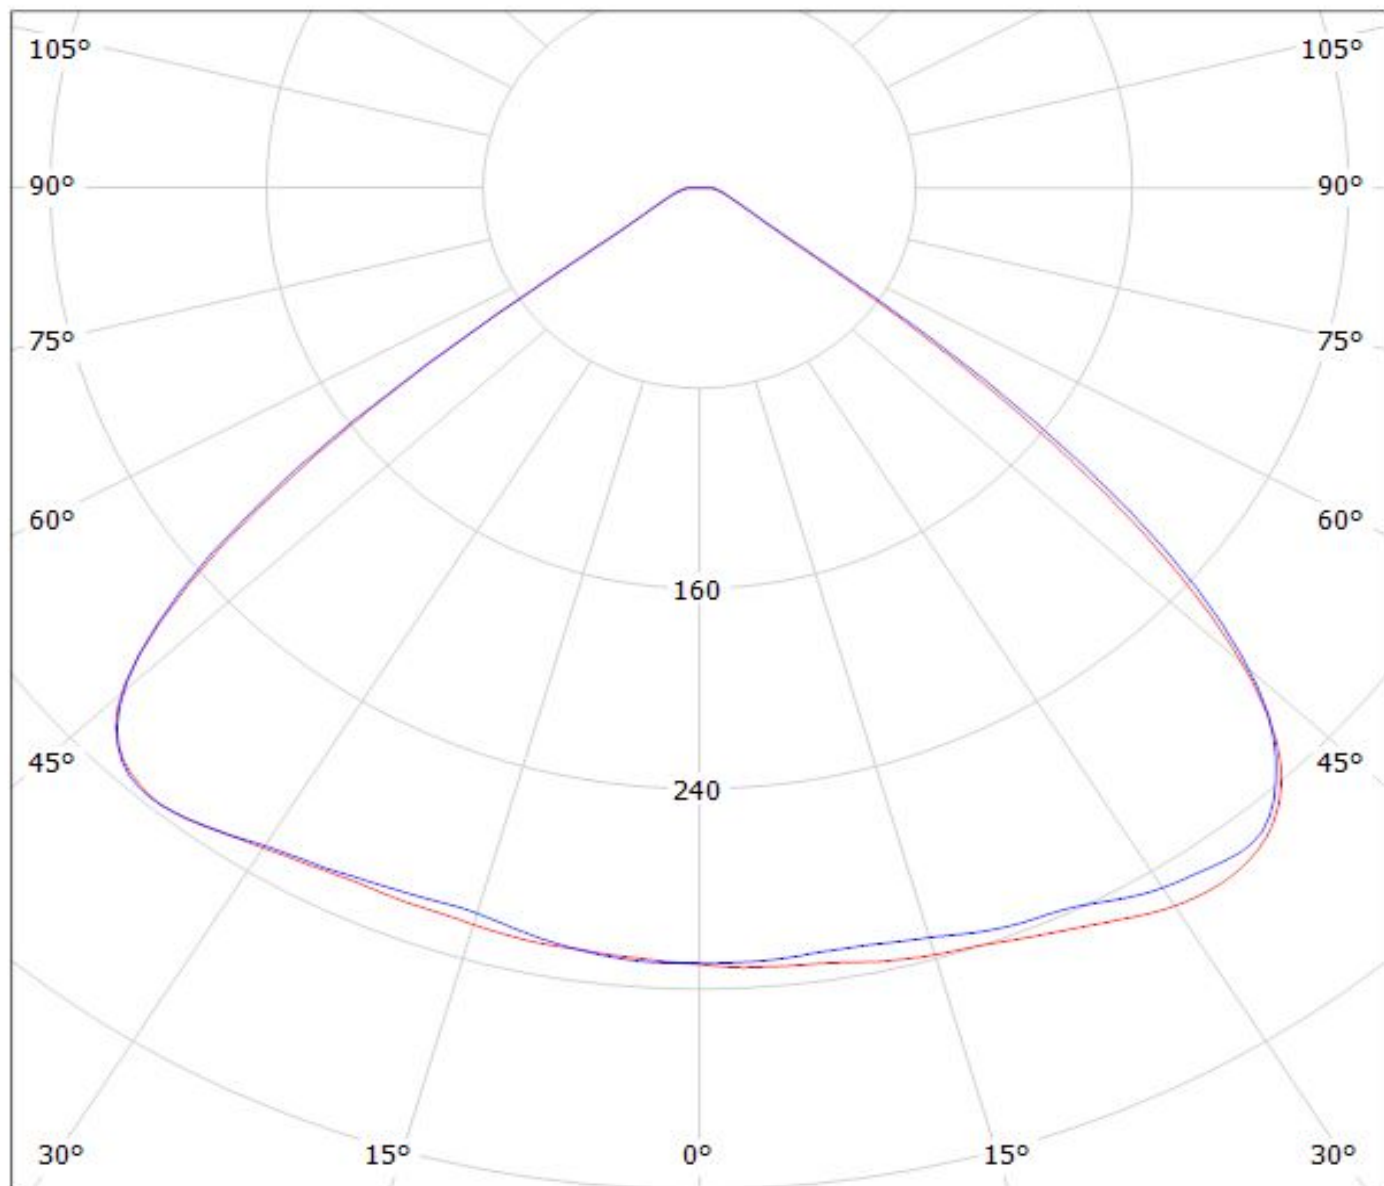

cd/klm


— C0 - C180

— C90 - C270

η = 94%

Luminaire: LEDiL Oy F14325_JENNY-8X1-CY_(V6)

Lamps: 1 x BRIDGELUX_V6_3500lm@250mA_P=40W_I=249.9mA

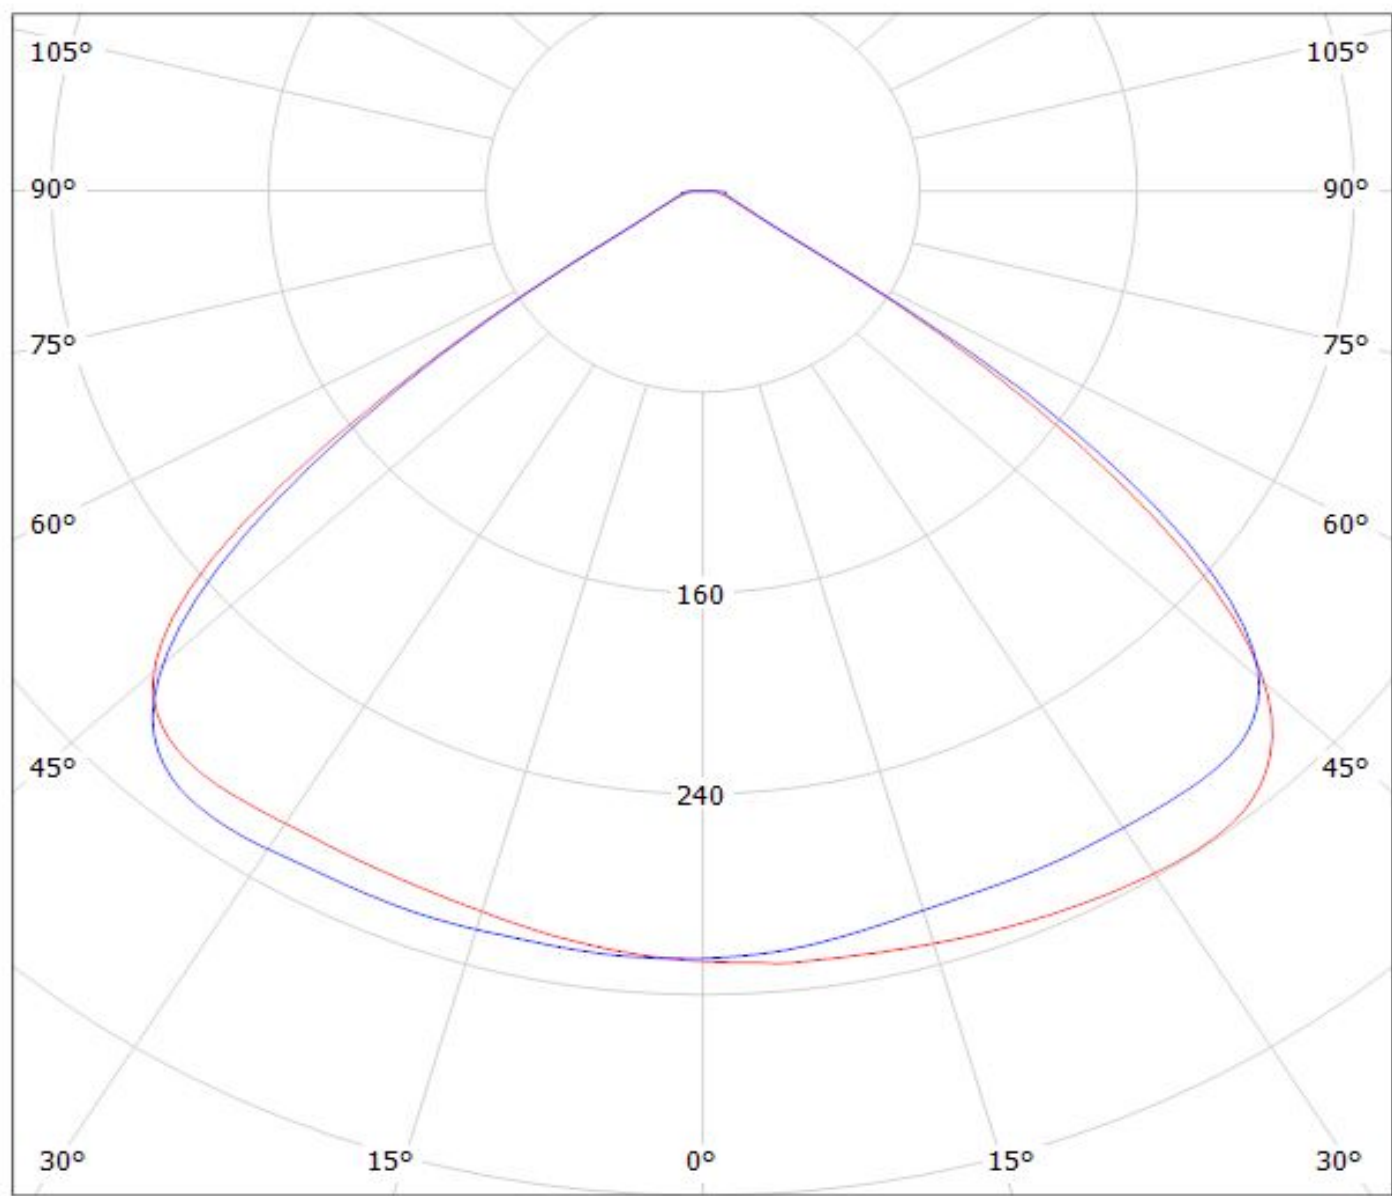

cd/klm

— C0 - C180 — C90 - C270

$\eta = 94\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.