



## I/O MFD 24 V DC, relay

**Part no.**  
**Article no.**  
**Catalog No.**

**MFD-R16**  
**265254**



Powering Business Worldwide™

### Delivery programme

Supply voltage	24 V DC
Inputs	
Digital	12
of which can be used as analog	4
Outputs	
Relay 10 A (UL)	4

### Approvals

Product Standards

UL File No.  
UL Category Control No.  
CSA File No.  
CSA Class No.  
North America Certification  
Degree of Protection  
shipping classification

IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking  
E135462  
NRAQ  
012528  
2252-01 + 2258-02  
UL listed, CSA certified  
IEC: IP20, UL/CSA Type: -  
BV  
GL  
LR



**BUREAU**  
**VERITAS**



Germanischer Lloyd



### General

Standards

Dimensions (W x H x D)

Weight

Mounting

		EN 61000-6-1/-2/-3/-4, IEC/EN 61000-4, IEC 60068-2-6, IEC 60068-2-27
	mm	89 x 90 x 44
	kg	0.15
		Fitted into the power supply unit.

### Terminal capacities

Solid

Flexible with ferrule

Standard screwdriver

	mm <sup>2</sup>	0.24 (AWG 24 - 12)
	mm <sup>2</sup>	0.22.5 (AWG 24 - 12)
	mm	3.5 x 0.6

### Climatic environmental conditions

Operating ambient temperature

Condensation

Storage

Relative humidity, non-condensing (IEC/EN 60068-2-30)

Air pressure (operation)

	°C	-25 to 55, cold as per IEC 60068-2-1, heat as per IEC 60068-2-2
		Take appropriate measures to prevent condensation
	°C	-40 - 70
	%	5 - 95
	hPa	795 - 1080

### Ambient conditions, mechanical

Pollution degree

Protection type (IEC/EN 60529, EN50178, VBG 4)

Vibrations (IEC/EN 60068-2-6)

  Constant amplitude 0.15 mm

  Constant acceleration 2 g

Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms

Drop to IEC/EN 60068-2-31

Free fall, packaged (IEC/EN 60068-2-32)

Mounting position

		2
		IP20
	Hz	
	Hz	10 - 57
	Hz	57 - 150
	Impacts	18
Drop height	mm	50
	m	1
		Vertical or horizontal

### Electromagnetic compatibility (EMC)

Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)

  Air discharge

	kV	
	kV	8

Contact discharge  
 Electromagnetic fields (RFI) to IEC EN 61000-4-3  
 Radio interference suppression  
 Burst Impulse (IEC/EN 61000-4-4, Level 3)  
 Supply cable  
 Signal lines  
 Power pulses (surge) (IEC/EN 61000-4-5)  
 power pulses (surge) (IEC/EN 61000-4-5, level 2)  
 Immunity to line-conducted interference to (IEC/EN 61000-4-6)

	kV	6
	V/m	10
		EN 55011 Class B, EN 55022 Class B
	kV	2
	kV	2
	kV	2 (supply cables, symmetrical)
	kV	0.5 (symmetrical power lines)
	V	10

## Insulation resistance

Clearance in air and creepage distances

Insulation resistance

		EN 50178, UL 508, CSA C22.2, No. 142
		EN 50178

## Digital inputs 24 V DC

Number

Inputs can be used as analog inputs

Potential isolation

From power supply

Between digital inputs

From the outputs

to PC interface, memory card, easyNet, easyLink

Rated operational voltage

On 0 signal

On 1 signal

Input current on 1 signal

I1 to I6

I7, I8

I9, I10

I11, I12

Delay time from 0 to 1

Debounce ON

Debounce OFF

Delay time from 1 to 0

Debounce ON

Debounce OFF

Cable length (unscreened)

Frequency counter

Quantity

Counter frequency

Pulse shape

Pulse pause ratio

Incremental counter

Quantity

Counter frequency

Pulse shape

Signal offset

Pulse pause ratio

Rapid counter inputs

Number

Counter frequency

Pulse shape

Pulse pause ratio

Cable length, screened

		12
		4 (I7, I8, I11, I12)
		No
		No
		Yes
		Yes
U <sub>e</sub>	V DC	24
U <sub>e</sub>	V DC	< 5.0 (I1 - I6, I9 - I10) < 8 (I7, I8, I11, I12)
U <sub>e</sub>	V DC	< 5.0 (I1 - I6, I9 - I10) < 8 (I7, I8, I11, I12)
	mA	3.3 (at 24 V DC)
	mA	2.2 (at 24 V DC)
	mA	3.3 (at 24 V DC)
	mA	2.2 (at 24 V DC)
	ms	
	ms	20
	ms	Normally 0.025 (I1 - I4), normally 0.25 (I5, I6, I9, I10), normally 0.15 (I7, I8, I11, I12)
	ms	
	ms	20
	ms	Normally 0.025 (I1 - I4), normally 0.25 (I5, I6, I9, I10), normally 0.15 (I7, I8, I11, I12)
	m	100
		4 (I1, I2, I3, I4)
	kHz	< 3
		Square
		01:01
		2 (I1 + I2, I3 + I4)
	kHz	$\frac{1}{3}$
		Square
		90°
		01:01
		4 (I1, I2, I3, I4)
	kHz	< 3
		Square
		01:01
	m	< 20


## Analog inputs

Number		1
Potential isolation		
From power supply		No
From the digital inputs		No
From the outputs		Yes
From the PC interface, memory card NET network, EASY-Link		Yes
Input type		DC voltage
Signal range	V DC	0 - 10
Resolution, analog	V	0.01
Resolution, digital	V	0.01
Resolution	Bit	10 (value 0 - 1023)
Input impedance	kΩ	11.2
Accuracy of actual value		
two MFD devices	%	± 3
Within a single device	%	± 2
Conversion time, analog/digital	ms	Every CPU cycle
Input current	mA	< 1
Cable length screened	m	< 30

## Analog inputs temperature resistance Pt100 or Ni1000 sensors

Potential isolation		
From power supply		No
From the digital inputs		No
From the outputs		Yes

## Relay outputs


Number		4
Parallel switching of outputs for increased output		Not permissible
Protection of an output relay		Miniature circuit-breaker B16 or fuse 8 A (slow)
Potential isolation		
From power supply		Yes
From the inputs		Yes
From the PC interface, memory card NET network, EASY-Link		Yes
Safe isolation according to EN 50178	V AC	300
Basic insulation	V AC	600
Lifespan, mechanical	Operations x 10 <sup>6</sup>	10
Contacts		
Conventional thermal current (10 A UL)	A	8
Recommended for load: 12 V AC/DC	mA	> 500
Short-circuit-proof cos φ = 1, characteristic B16 at 600 A	A	16
Short-circuit-proof cos φ = 0.5 to 0.7, characteristic B16 at 900 A	A	16
Rated impulse withstand voltage U <sub>imp</sub> of contact coil	kV	6
Rated operational voltage	U <sub>e</sub> V AC	250
Rated insulation voltage	U <sub>i</sub> V AC	250
Safe isolation to EN 50178 between coil and contact	V AC	300
Safe isolation to EN 50178 between 2 contacts	V AC	300
Making capacity		
AC-15, 230 V AC, 3 A	Operations	300000
DC-13, 24 V DC, 5 A, 0.1 Hz	Operations	200000
Breaking capacity		
AC-15, 250 V AC, 3 A (600 Ops./h)	Operations	300000
DC-13, L/R  150 ms, 24 V DC, 1 A (500 S/h)	Operations	200000

Filament bulb load		
1000 W at 230/240 V AC	Operations	25000
500 W at 115/120 V AC	Operations	25000
Fluorescent lamp load		
Fluorescent lamp load 10 x 58 W at 230/240 V AC		
With upstream electrical device	Operations	25000
Uncompensated	Operations	25000
Fluorescent lamp load 1 x 58 W at 230/240 V AC, conventional, compensated	Operations	25000
Switching frequency		
Mechanical operations	x 10 <sup>6</sup>	10
Switching frequency	Hz	10
Resistive load/lamp load	Hz	2
Inductive load	Hz	0.5
UL/CSA		
Uninterrupted current at 240 V AC	A	10
Uninterrupted current at 24 V DC	A	8
AC		
Control Circuit Rating Codes (utilization category)		B 300 Light Pilot Duty
Max. rated operational voltage	V AC	300
max. thermal continuous current cos φ = 1 at B 300	A	5
max. make/break cos φ ≠ capacity 1 at B 300	VA	3600/360
DC		
Control Circuit Rating Codes (utilization category)		R 300 Light Pilot Duty
Max. rated operational voltage	V DC	300
Max. thermal uninterrupted current at R 300	A	1
Max. make/break capacity at R 300	VA	28/28

## Technical data ETIM 5.0

PLC's (EG000024) / PLC digital I/O-module (EC001419)		
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / SPS digital input/output module (ecl@ss8-27-24-22-04 [AKE527010])		
Supply voltage AC 50 Hz	V	0 - 0
Supply voltage AC 60 Hz	V	0 - 0
Supply voltage DC	V	0 - 0
Voltage type of supply voltage		DC
Number of digital inputs		12
Number of digital outputs		4
Digital inputs configurable		No
Digital outputs configurable		No
Input current at signal 1	mA	3.3
Permitted voltage at input	V	0 - 0
Type of voltage (input voltage)		DC
Type of digital output		Relay
Output current	A	8
Permitted voltage at output	V	0 - 0
Type of output voltage		AC/DC
Short-circuit protection, outputs available		No
Redundancy		No
Type of electric connection		Spring clamp connection
Time delay at signal exchange	ms	0.1 - 20
Suited for safety functions		No
Category according to EN 954-1		-
SIL according to IEC 61508		0
Performance level acc. to EN ISO 13849-1		-
Appendant operation agent (Ex ia)		No
Appendant operation agent (Ex ib)		No
Explosion safety category for gas		None
Explosion safety category for dust		None
Width	mm	90
Height	mm	44
Depth	mm	89

## Dimensions

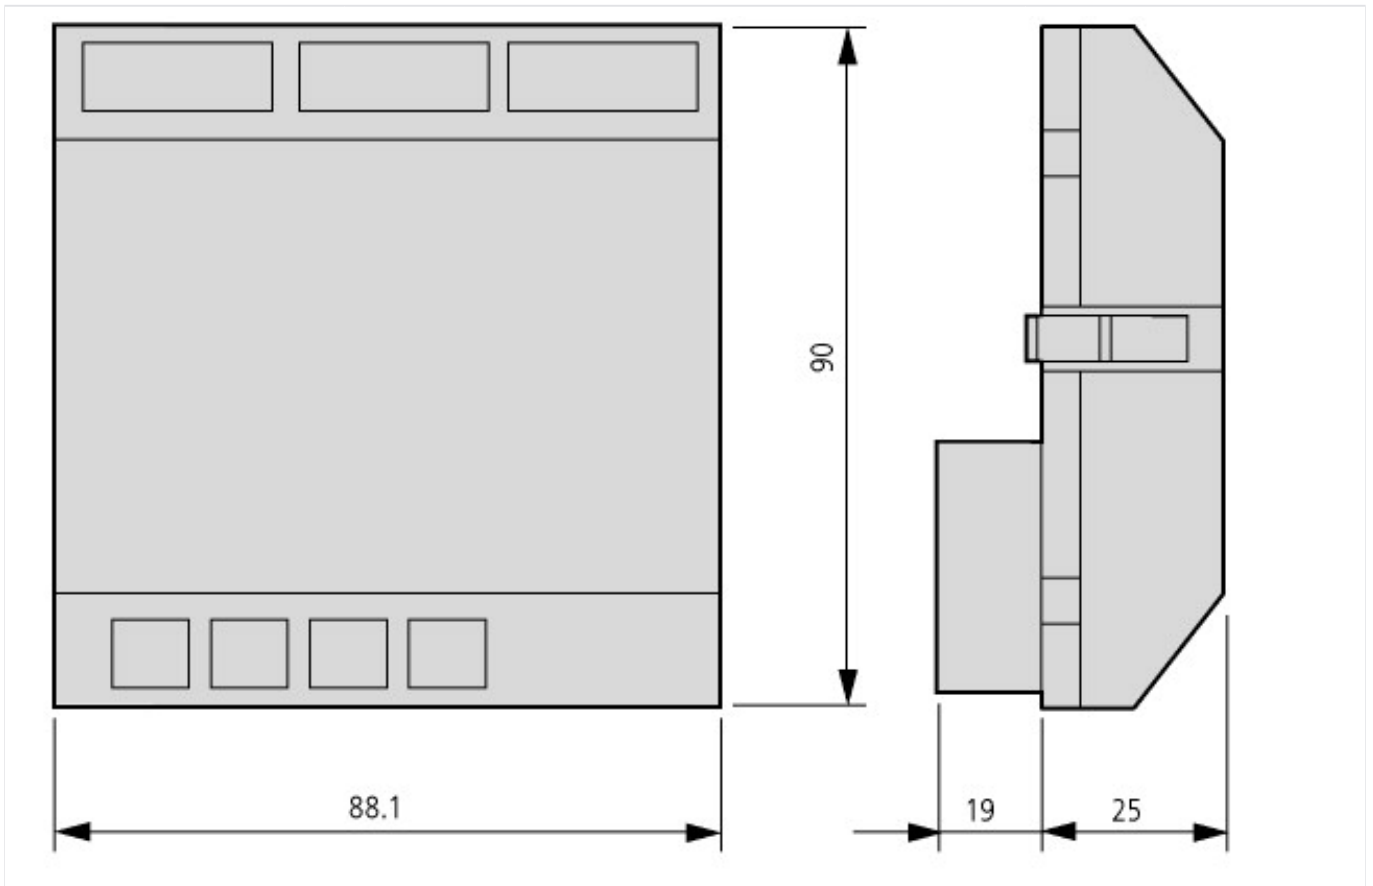

### Additional product information (links)

<b>IL05013014Z (AWA2528-2019) Multi function display, Control relay easy</b>	
IL05013014Z (AWA2528-2019) Multi function display, Control relay easy	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013014Z2010_11.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013014Z2010_11.pdf</a>
<b>MN05002001Z-EN (AWB2528-1480) MFD-Titan multi-function display</b>	
MN05002001Z-DE (AWB2528-1480) Multi-Funktions-Display MFD-Titan - Deutsch	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002001Z_DE.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002001Z_DE.pdf</a>
MN05002001Z-EN (AWB2528-1480) MFD-Titan multi-function display - English	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002001Z_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002001Z_EN.pdf</a>
Labeleditor	<a href="http://downloadcenter.moeller.net/de/software.f6023a63-5acb-42c7-a51c-ccf99091cace">http://downloadcenter.moeller.net/de/software.f6023a63-5acb-42c7-a51c-ccf99091cace</a>