



## 4-pole contactor,63A/AC-1,AC operated



Powering Business Worldwide™

**Part no.** DILMP63(110V50HZ,120V60HZ)

**Article no.** 109848

### Program


Product range			Contactors
Application			Contactors for 4 pole electric consumers
Subrange			Contactors up to 200 A, 4 pole
Connection technique			Screw terminals
Pole			4 pole
Rated operational current			
AC-1			
Conventional free air thermal current, 3 pole, 50 - 60 Hz			
at 40 °C	$I_{th}=I_e$	A	63
at 50 °C	$I_{th}=I_e$	A	60
at 60 °C	$I_{th}=I_e$	A	54
Contact sequence			
For use with			DILM150-XHI(A)(V)... or DILM1000-XHI11-SA or DILM1000-XHI(V)11-SI
Voltage AC/DC			AC operation
<b>Instructions</b> Contacts to EN 50012.			

### Approbativen

Product Standards	IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.	E29096
UL CCN	NLDX
CSA File No.	012528
CSA Class No.	2411-03, 3211-04
NA Certification	UL listed, CSA certified
Specially designed for NA	No

### General

Standards			IEC/EN 60947, VDE 0660, UL, CSA
Lifespan, mechanical			
AC operated	Operations	$x 10^6$	10
DC operated	Operations	$x 10^6$	10
Operating frequency, mechanical			
AC operated	Operations/h		5000
DC operated	Operations/h		5000
Climatic proofing			Damp heat, constant to IEC 60068-2-3 Damp heat, cyclic to IEC 60068-2-30
Ambient temperature		°C	
Open		°C	- 25 - 60
Enclosed		°C	- 25 - 40
Storage		°C	- 40 - 80

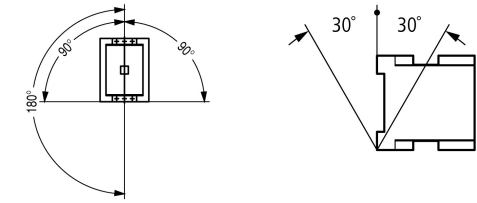Mounting position, AC- and DC operated			
Mechanical shock resistance (IEC/EN 60068-2-27)			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact	g		10
Auxiliary contacts			
N/O contact	g		7
N/C contact	g		5
Protection type			IP00
with accessories			IP20
Protection against direct contact when actuated from front (EN 90274)			Finger- and back-of-hand proof
Terminal capacity main cable			
Solid		mm <sup>2</sup>	1 x (2.5 - 16) 2 x (2.5 - 16)
Flexible with ferrule		mm <sup>2</sup>	1 x (2.5 - 35) 2 x (2.5 - 25)
Stranded		mm <sup>2</sup>	1 x (16 - 50) 2 x (16 - 35)
Solid or stranded		AWG	12 - 2
Flat conductor	Number of segments x width x thickness	mm	2 x (6 x 9 x 0.8)
Terminal capacity control circuit cables			
Solid		mm <sup>2</sup>	1 x (0.75 - 4) 2 x (0.75 - 4)
Flexible with ferrule		mm <sup>2</sup>	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Solid or stranded		AWG	18 - 14
Main cable connection screw/bolt			M6
Tightening torque		Nm	3.3
Control circuit cable connection screw/bolt			M3.5
Tightening torque		Nm	1.2
Tool			
Main cable			
Pozidriv screwdriver	Size		2
Standard screwdriver	mm		0.8 x 5.5 1 x 6
Control circuit cables			
Pozidriv screwdriver	Size		2
Standard screwdriver	mm		0.8 x 5.5 1 x 6

### Main conducting paths

Rated impulse withstand voltage	U <sub>imp</sub>	V AC	8000
Overvoltage category/pollution degree			III/3
Rated insulation voltage	U <sub>i</sub>	V AC	690
Rated operational voltage	U <sub>e</sub>	V AC	690
Safe isolation to VDE 0106 Part 101 and Part 101/A1			
between coil and contacts		V AC	440
between the contacts		V AC	440
Making capacity (p.f. to IEC/EN 60947)			

	Up to 690 V	A	560
<b>Breaking capacity</b>			
220/230 V		A	400
380/400 V		A	400
500 V		A	400
660/690 V		A	250
<b>Short-circuit rating</b>			
<b>Short-circuit protection maximum fuse</b>			
<b>Type "2" coordination</b>			
400 V	gG/gL 500 V	A	63
690 V	gG/gL 690 V	A	50
<b>Type "1" coordination</b>			
400 V	gG/gL 500 V	A	125
690 V	gG/gL 690 V	A	80

## AC

<b>AC-1 duty</b>			
<b>Rated operational current</b>			
<b>Conventional free air thermal current, 3 pole, 50 - 60 Hz</b>			
<b>Open</b>			
at 40 °C	$I_{th}=I_e$	A	63
at 50 °C	$I_{th}=I_e$	A	60
at 60 °C	$I_{th}=I_e$	A	54
enclosed	$I_{th}$	A	50
<b>Conventional free air thermal current, 1 pole</b>			
open	$I_{th}$	A	162
enclosed	$I_{th}$	A	146
<b>Motor rating</b>			
	P	kWh	
Motor rating AC-1 230 V		kW	23
Motor rating AC-1 240 V		kW	25
Motor rating AC-1 380/400 V		kW	39
Motor rating AC-1 415 V		kW	43
Motor rating AC-1 440 V		kW	46
Motor rating AC-1 500 V		kW	52
Motor rating AC-1 690 V		kW	68
<b>AC-3 duty</b>			
<b>Rated operational current AC-3 open, 50 - 60 Hz, 3 pole</b>			
220/230 V	$I_e$	A	40
240 V	$I_e$	A	40
380/400 V	$I_e$	A	40
415 V	$I_e$	A	40
440V	$I_e$	A	40
500 V	$I_e$	A	40
660/690 V	$I_e$	A	25
<b>Motor rating</b>			
	P	kWh	
220/230 V	P	kW	12.5
240V	P	kW	13.5
380/400 V	P	kW	18.5
415 V	P	kW	24
440 V	P	kW	25
500 V	P	kW	28
660/690 V	P	kW	23


## DC

Rated operational current, open			
DC-1 operation			
60 V	$I_e$	A	63
110 V	$I_e$	A	63
220 V	$I_e$	A	63
440 V	$I_e$	A	8
DC-3 operation			
60 V	$I_e$	A	63
110 V	$I_e$	A	63
220 V	$I_e$	A	63
440 V	$I_e$	A	5
DC-5 operation			
60 V	$I_e$	A	63
110 V	$I_e$	A	50
220 V	$I_e$	A	38
440 V	$I_e$	A	5

### Current heat loss (3 pole)

Current heat loss at $I_{Th}$		W	16
Impedance per pole		m $\Omega$	1

### Magnet systems

Voltage tolerance		$x U_c$	
AC operated 50 Hz	Pick-up	$x U_c$	0.8 - 1.1
AC operated 50/60 Hz		$x U_c$	0.85 - 1.1
Drop-out voltage AC operated	Drop-out	$x U_c$	0.4 - 0.6
DC operated	Pick-up	$x U_c$	0.7 - 1.2
DC operated	Drop-out	$x U_c$	0.2 - 0.6
Power consumption of the coil in a cold state and $1.0 x U_c$			
AC operated 50/60 Hz	Pick-up	VA	150
AC operated 50/60 Hz	Pick-up	W	95
AC operated 50/60 Hz	Sealing	VA	16
AC operated 50/60 Hz	Sealing	W	4
DC operated	Pick-up	W	24
DC operated	Sealing	W	0,5
Duty factor		% DF	100
Switching times at 100 % $U_c$ (approximate values)			
Main contacts			
AC operated			
Closing delay		ms	12 - 18
Opening delay		ms	8 - 13
DC operated		ms	
Closing delay		ms	54
Opening delay		ms	24
Arcing time		ms	10
Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal).		mA	 1

### Notes


At least double-pulse bridge rectifier


### Technical data according to ETIM 4.0

Number of main contacts as N/Os			4
Rated operation current $I_e$ at AC-1, 400 V			63
Connection type main circuit			Screw connection

Rated control voltage $U_s$ at AC 60HZ	V	120
Number of auxiliary contacts as N/Os		0
Rated control voltage $U_s$ at AC 50HZ	V	110
Number of auxiliary contacts as N/Cs		0
Suitable for rail-mounting		No
Rated control voltage $U_s$ at DC	V	0
Voltage type for actuation		AC
Rated operation current $I_e$ at AC-3, 400 V	A	40
Number of N/Cs as main contact		0
Motor rating at AC-3, 400 V	kWh	18.5

## Characteristics

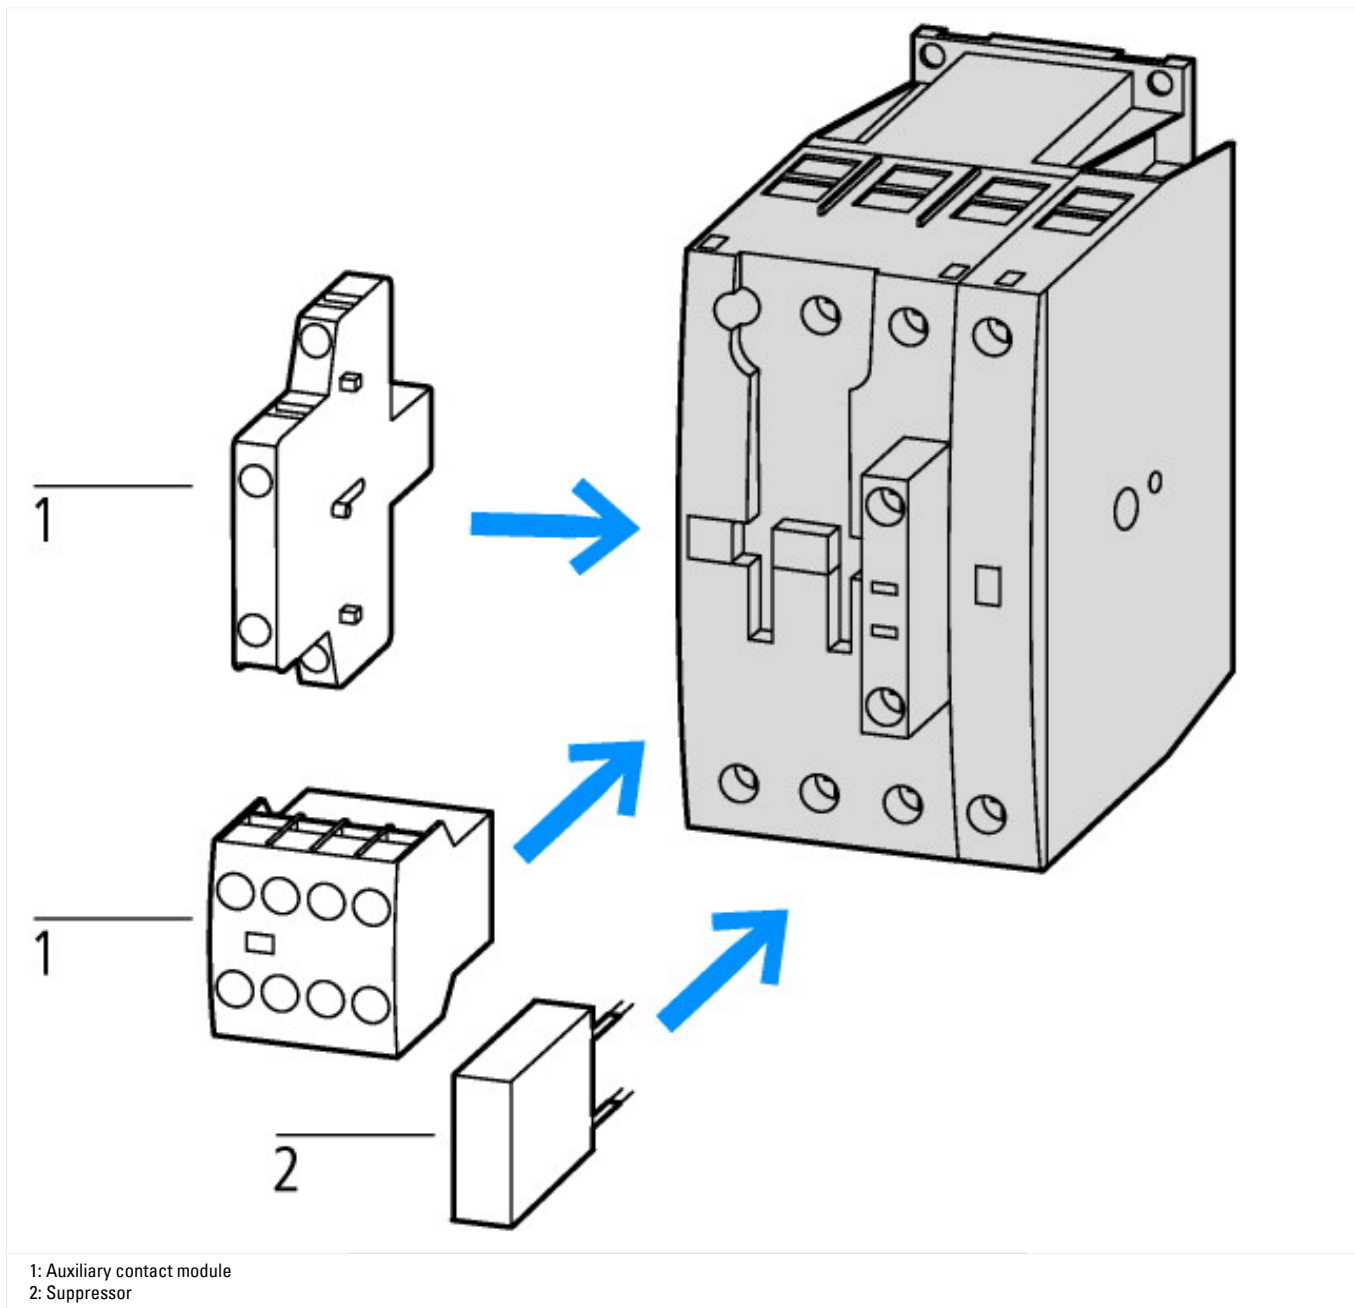

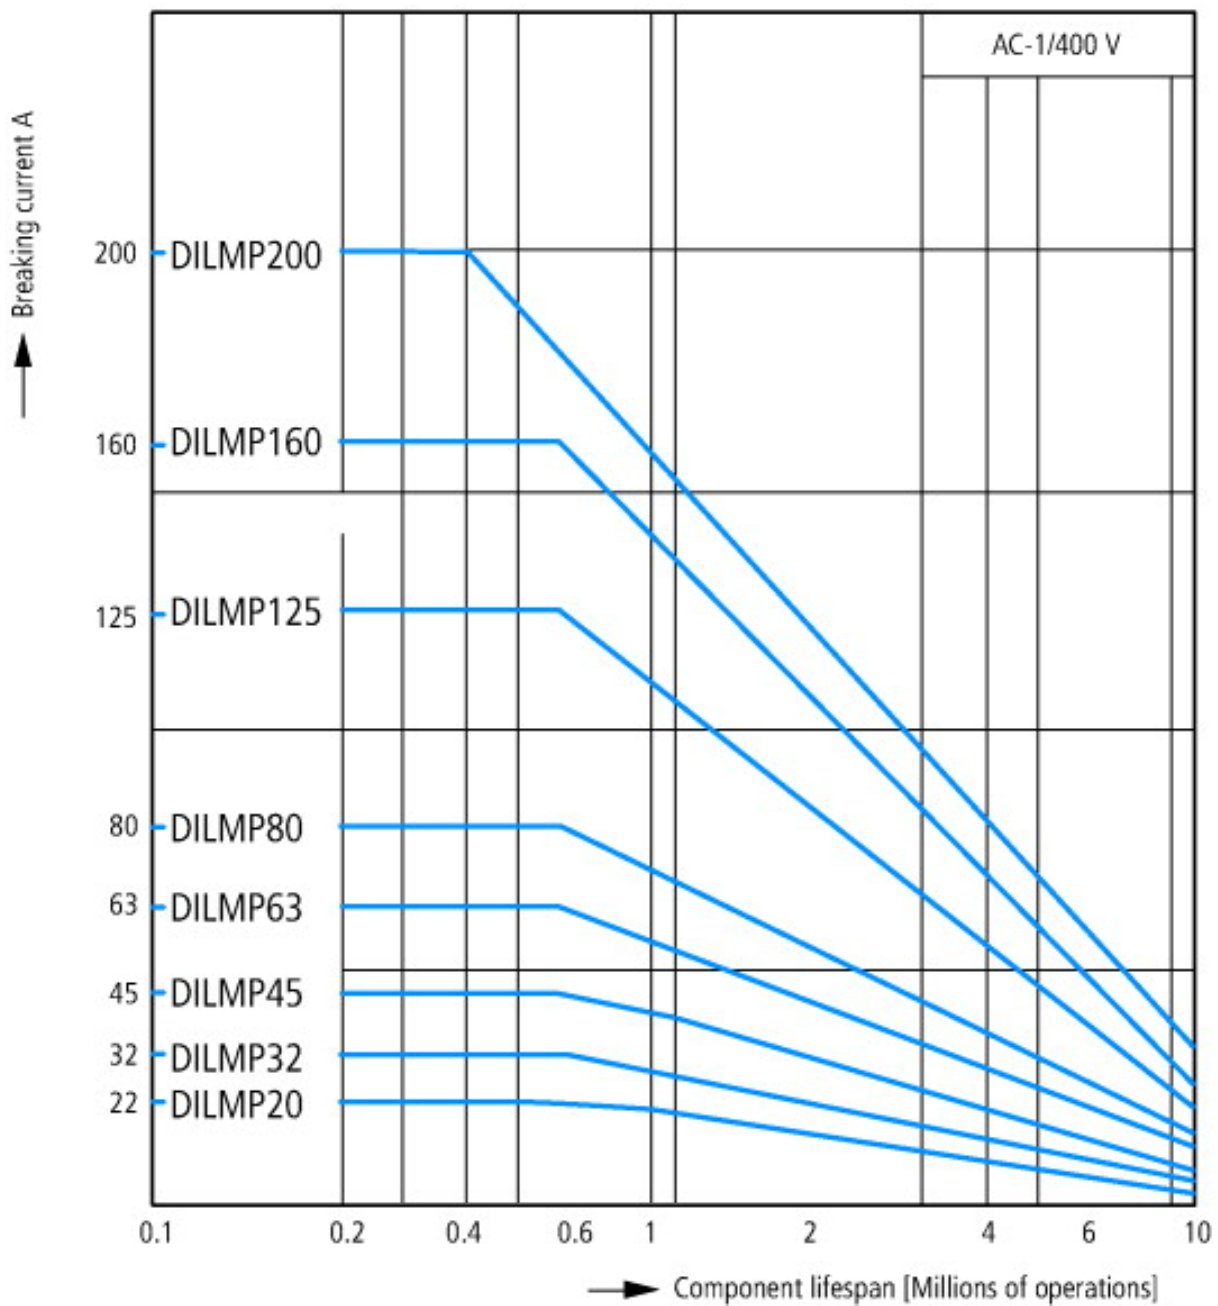



Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 &#x00D7; rated operational current  
 Switch off: 1 &#x00D7; rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat

### CAD-Data

Product standards CAD data:

<http://eaton-moeller.partcommunity.com/PARTcommunity/Portal/eaton-moeller>

### Dimensions

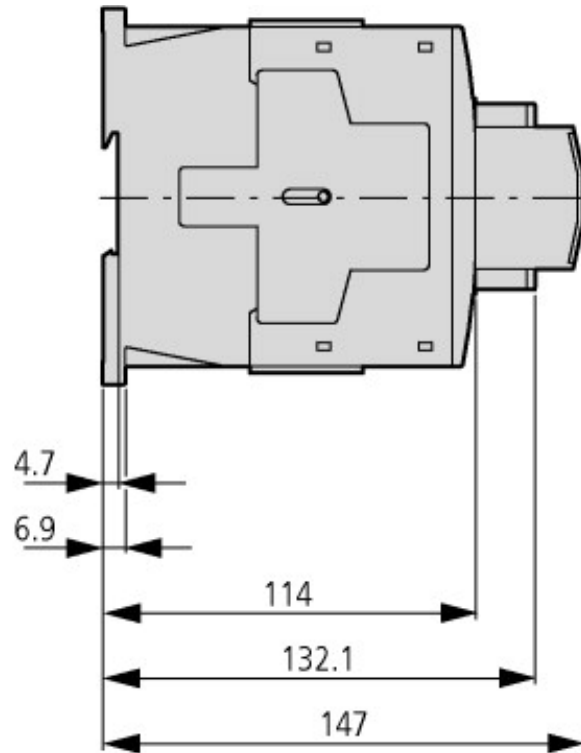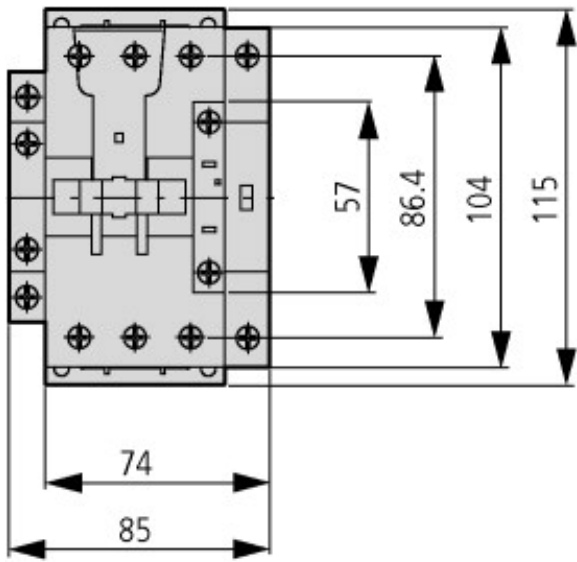

Contactors

105

2 × M4

45

distance at side to earthed parts: 6 mm

DILMP63  
DILMP80

#### Additional product information (links)

IL03407049Z (AWA2100-2356) 4-pole Contactor

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407049Z2010\\_10.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407049Z2010_10.pdf)

Installation Instructions

[http://www.moeller.net/en/support/instructions\\_awa.jsp](http://www.moeller.net/en/support/instructions_awa.jsp)

Documentation

<http://www.moeller.net/en/support/index.jsp>

Motor starters and "Special Purpose Ratings" for the North American market	<a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a>
Busbar Component Adapters for modern Industrial control panels	<a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>
The Interaction of Contactors with PLCs	<a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a>
Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts	<a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a>
Switchgear for Luminaires	<a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a>
Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors	<a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a>
X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely	<a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>
Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions	<a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>
X-Start - New Generation:100 years of Moeller contactors - Continuous Progress-	<a href="http://www.moeller.net/binary/ver_techpapers/ver937en.pdf">http://www.moeller.net/binary/ver_techpapers/ver937en.pdf</a>
Switchgear of Power Factor Correction Systems	<a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>