


# Distribution blocks, three pole

## Type BRT

### Screw clamp, DIN 3

#### BRT 115 A

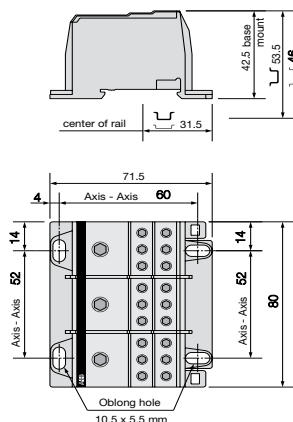


BRT 115 A

Characteristics		IEC		UL	CSA
		NFC	DIN		
Wire size	Solid	0.5 - 16 mm <sup>2</sup>		Input 8 to 2 AWG (per pole)	8 to 2 AWG (per pole)
mm <sup>2</sup> / AWG	Stranded	0.5 - 16 mm <sup>2</sup>		Output 14 to 4 AWG (per pole)	14 to 4 AWG (per pole)
Voltage	V	690		600	600
Current	A	125		115	115
Rated wire size	mm <sup>2</sup> / AWG	10-35 mm <sup>2</sup>		—	—
Recommended torque input	Nm / lb.in			6 Nm / 31 lb. in.	
Recommended torque output				3 Nm / 17.5 lb. in.	
Wire stripping length					
Input	mm / inches			15 mm / 0.59"	
Output				11 mm / 0.43"	

#### Selection

Description	Type	Packaging	Catalog number
Grey body	BRT 115 A	1	035620926

#### BRT 175 A

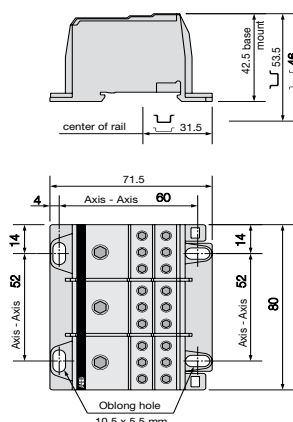

BRT 175 A


Characteristics		IEC		UL	CSA
		NFC	DIN		
Wire size	Solid	0.5 - 16 mm <sup>2</sup>		Input 6 to 2/0 AWG (per pole)	6 to 2/0 AWG (per pole)
mm <sup>2</sup> / AWG	Stranded	0.5 - 16 mm <sup>2</sup>		Output 14 to 4 AWG (per pole)	14 to 4 AWG (per pole)
Voltage	V	690		600	600
Current	A	125		175	175
Rated wire size	mm <sup>2</sup> / AWG	10-35 mm <sup>2</sup>		—	—
Recommended torque input	Nm / lb.in			6 Nm / 31 lb. in.	
Recommended torque output				3 Nm / 17.5 lb. in.	
Wire stripping length					
Input	mm / inches			15 mm / 0.59"	
Output				11 mm / 0.43"	

#### Selection

Description	Type	Packaging	Catalog number
Grey body	BRT 175 A	1	035621021

#### Accessories

Description	Type	Packaging	Catalog number
End stop	BAM2 9.9 mm	50	020635116



BAM2