

SOT223 N-CHANNEL ENHANCEMENT MODE LOW THRESHOLD VERTICAL DMOS FET


ISSUE 2 - JANUARY 1996 

ZVNL120G

FEATURES

- * V_{DS} - 200V
- * $R_{DS(ON)}$ - 10 Ω

PARTMARKING DETAIL - ZVNL120



ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	200	V
Continuous Drain Current at $T_{amb}=25^{\circ}\text{C}$	I_D	320	mA
Pulsed Drain Current	I_{DM}	2	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation at $T_{amb}=25^{\circ}\text{C}$	P_{tot}	2	W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 to +150	$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	BV_{DSS}	200		V	$I_D=1\text{mA}, V_{GS}=0\text{V}$
Gate-Source Threshold Voltage	$V_{GS(th)}$	0.5	1.5	V	$I_D=1\text{mA}, V_{DS}=V_{GS}$
Gate-Body Leakage	I_{GSS}		100	nA	$V_{GS}=\pm 20\text{V}, V_{DS}=0\text{V}$
Zero Gate Voltage Drain Current	I_{DSS}		10 100	μA μA	$V_{DS}=200\text{V}, V_{GS}=0\text{V}$ $V_{DS}=160\text{V}, V_{GS}=0\text{V}, T=125^{\circ}\text{C}(2)$
On-State Drain Current(1)	$I_{D(on)}$	500		mA	$V_{DS}=25\text{V}, V_{GS}=5\text{V}$
Static Drain-Source On-State Resistance (1)	$R_{DS(on)}$		10 10	Ω Ω	$V_{GS}=5\text{V}, I_D=250\text{mA}$ $V_{GS}=3\text{V}, I_D=125\text{mA}$
Forward Transconductance(1)(2)	g_{fs}	200		mS	$V_{DS}=25\text{V}, I_D=250\text{mA}$
Input Capacitance (2)	C_{iss}		85	pF	$V_{DS}=25\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$
Common Source Output Capacitance (2)	C_{oss}		20	pF	
Reverse Transfer Capacitance (2)	C_{rss}		7	pF	
Turn-On Delay Time (2)(3)	$t_{d(on)}$		8	ns	$V_{DD}=25\text{V}, I_D=250\text{mA}$
Rise Time (2)(3)	t_r		8	ns	
Turn-Off Delay Time (2)(3)	$t_{d(off)}$		20	ns	
Fall Time (2)(3)	t_f		12	ns	


(1) Measured under pulsed conditions. Width=300 μs . Duty cycle $\leq 2\%$ (2) Sample test.

(3) Switching times measured with 50 Ω source impedance and <5ns rise time on a pulse generator


TYPICAL CHARACTERISTICS

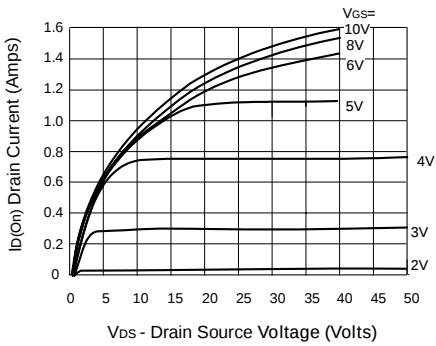


Output Characteristics

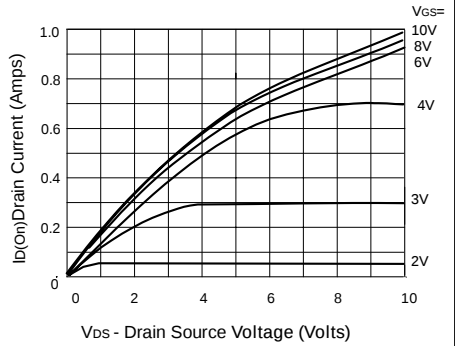


Saturation Characteristics

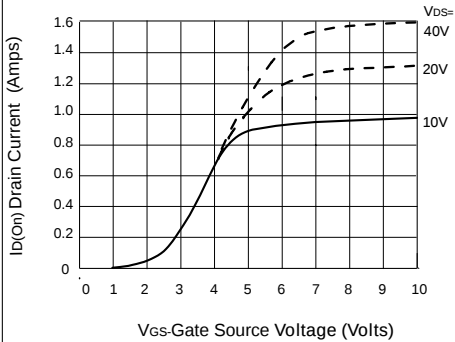


Transfer Characteristics

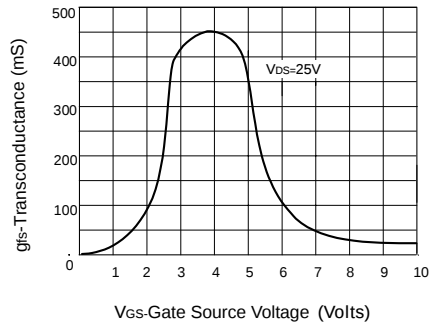

Transconductance v gate-source voltage

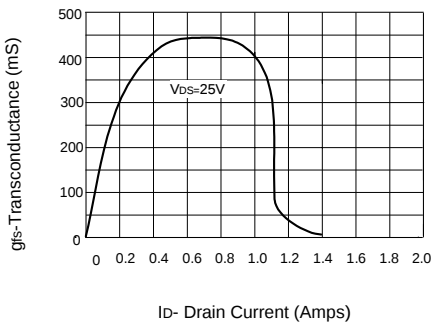

Transconductance v drain current

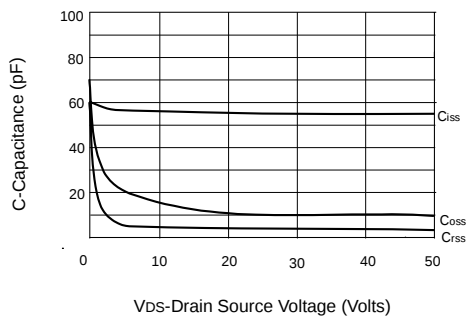

Capacitance v drain-source voltage

ZVNL120G

TYPICAL CHARACTERISTICS

