


XLR Cable Connector

NC*FRX & NC*MRX


Assembly Instructions

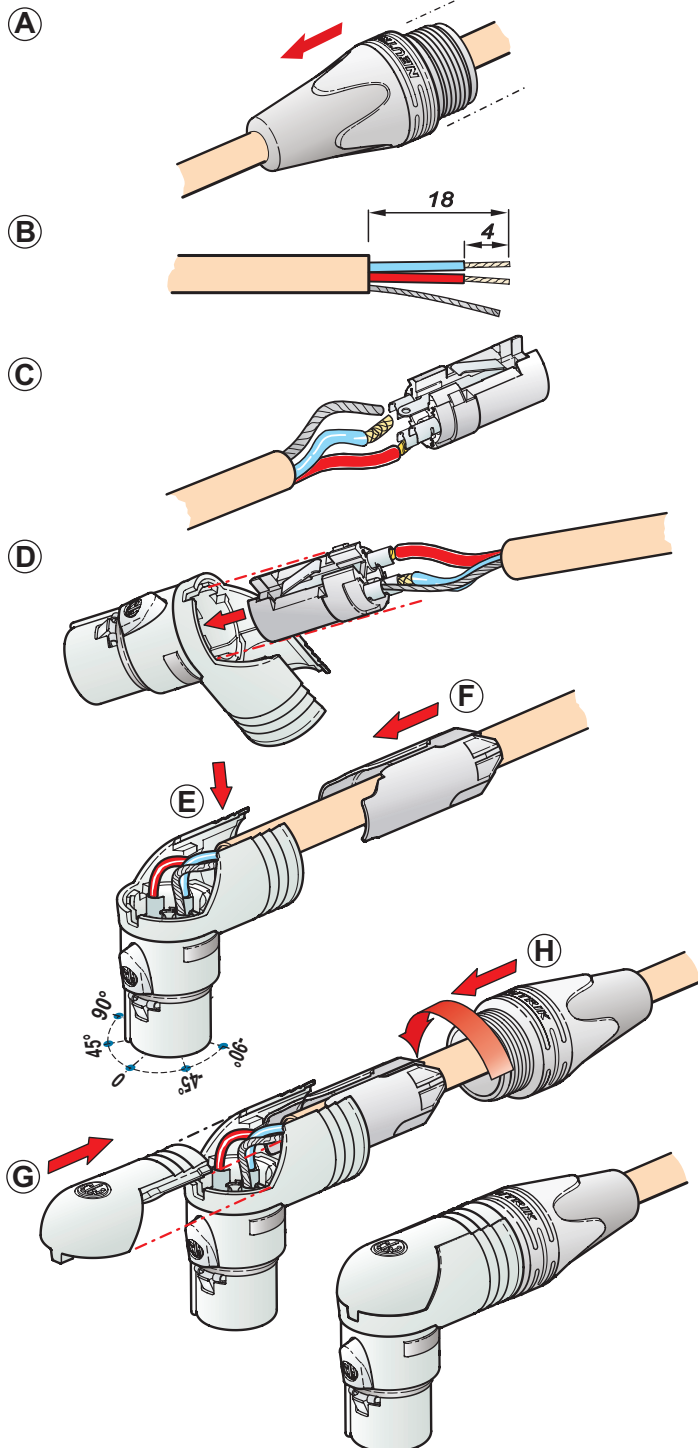

- A** Slide the boot onto the cable.
- B** Prepare cable as shown.
- C** Insert wires into the terminals and solder them.
- D** Slide insert into the housing until it snaps in.
Align insert with housing.
- E** Position the cable.
- F** Slide the chuck into the housing.
Pay attention to position chuck as shown.
- G** Position the cover.
Before place the cover choose the orientation of cable outlet by turning housing.
- H** Finish the installation by turning the bushing onto the connector.

Disassembly of the insert

- I** Remove cover and chuck.
- J** Push latch and turn housing approx. a half turn until housing can be separated.
- K** Lift the locking clip by help of a screw driver.
- L** Remove insert.

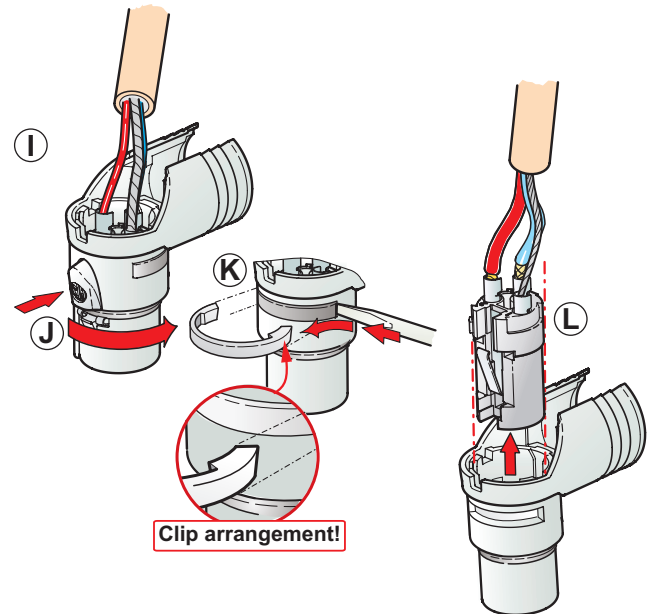

NEUTRIK AG
NEUTRIK Zürich AG
NEUTRIK USA Inc.
NEUTRIK (UK) Ltd.

LI
CH
USA
UK

T: +423 / 237 24 24
T: +41 44 / 736 5010
T: +1 732 / 901 9488
T: +44 1983 / 811 441

F: +423 / 232 53 93
F: +41 44 / 736 5011
F: +1 732 / 901 9608
F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH
NEUTRIK France
NEUTRIK Tokyo Ltd.
NEUTRIK Hong Kong Ltd.

DE/NL/AT
FR
JP
HK

T: +49 8131 / 280 890
T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055

F: +49 8131 / 280 830
F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052

www.neutrik.com



NEUTRIK
CONNECTING THE WORLD

Draft. Nr.: BDA 173-0 / 3102M1441

Update: 15.11.2007

Data subject to change without prior notice. ©2007 NEUTRIK®. ALL RIGHTS RESERVED.