



SIRIUS, COMPACT STARTER,  
 DIRECT STARTER 690 V,  
 110 ... 240 V AC/DC, 50 ... 60 HZ,  
 0.32 ... 1.25 A, IP20,  
 CONNECTION MAIN CIRCUIT: SCREW TERMINAL,  
 CONNECTION AUXILIARY CIRCUIT: SCREW TERMINAL

| General technical data:                                                                        |    |                                                 |
|------------------------------------------------------------------------------------------------|----|-------------------------------------------------|
| product brand name                                                                             |    | SIRIUS                                          |
| product designation                                                                            |    | compact starter                                 |
| Design of the product                                                                          |    | direct starter                                  |
| Trip class                                                                                     |    | CLASS 10 and 20 adjustable                      |
| Product function                                                                               |    |                                                 |
| <ul style="list-style-type: none"> <li>control circuit interface to parallel wiring</li> </ul> |    | Yes                                             |
| <ul style="list-style-type: none"> <li>bus-communication</li> </ul>                            |    | No                                              |
| <ul style="list-style-type: none"> <li>short circuit protection</li> </ul>                     |    | Yes                                             |
| <ul style="list-style-type: none"> <li>control circuit interface with IO link</li> </ul>       |    | No                                              |
| Type of assignment                                                                             |    | continuous operation according to IEC 60947-6-2 |
| Protection class IP                                                                            |    | IP20                                            |
| Degree of pollution                                                                            |    | 3                                               |
| mounting position / recommended                                                                |    | vertical, on horizontal standard mounting rail  |
| Installation altitude / at a height over sea level                                             |    |                                                 |
| <ul style="list-style-type: none"> <li>maximum</li> </ul>                                      | m  | 2,000                                           |
| Ambient temperature                                                                            |    |                                                 |
| <ul style="list-style-type: none"> <li>during storage</li> </ul>                               | °C | -55 ... +80                                     |
| <ul style="list-style-type: none"> <li>during operating</li> </ul>                             | °C | -20 ... +60                                     |
| <ul style="list-style-type: none"> <li>during transport</li> </ul>                             | °C | -55 ... +80                                     |

|                                                                                                                                                                                                           |             |                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------------------------------------------------------------|
| <b>Relative humidity</b><br>• during operating phase                                                                                                                                                      | %           | 10 ... 90                                                                        |
| <b>Resistance against shock</b>                                                                                                                                                                           |             | a=60 m/s <sup>2</sup> (6g) with 10 ms per 3 shocks in all axes                   |
| <b>Resistance against vibration</b>                                                                                                                                                                       |             | f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s <sup>2</sup> ; 10 cycles |
| <b>Impulse voltage resistance / rated value</b>                                                                                                                                                           | V           | 6,000                                                                            |
| <b>Field-bound parasitic coupling</b><br>• according to IEC 61000-4-3                                                                                                                                     |             | 10 V/m                                                                           |
| <b>Insulation voltage / rated value</b>                                                                                                                                                                   | V           | 690                                                                              |
| <b>Conductor-bound parasitic coupling conductor-earth SURGE</b><br>• according to IEC 61000-4-5                                                                                                           |             | 4 kV main contacts, 2 kV auxiliary contacts                                      |
| <b>Conductor-bound parasitic coupling conductor-conductor SURGE</b><br>• according to IEC 61000-4-5                                                                                                       |             | 2 kV main contacts, 1 kV auxiliary contacts                                      |
| <b>Conductor-bound parasitic coupling BURST</b><br>• according to IEC 61000-4-4                                                                                                                           |             | 4 kV main contacts, 2 kV auxiliary contacts                                      |
| <b>Maximum permissible voltage for safe disconnection</b><br>• between main circuit and auxiliary circuit<br>• between control and auxiliary circuit<br>• between auxiliary circuit and auxiliary circuit | V<br>V<br>V | 400<br>300<br>250                                                                |
| <b>Item designation</b><br>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750<br>• according to DIN EN 61346-2                                                                    |             | Q<br>Q                                                                           |

#### Main circuit:

|                                                                                                                                                    |                |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------------|
| <b>Operating voltage / at AC-3 / rated value</b><br>• maximum                                                                                      | V              | 690                   |
| <b>Number of poles / for main current circuit</b>                                                                                                  |                | 3                     |
| <b>Adjustable response current</b><br>• of the current-dependent overload release                                                                  | A              | 0.32 ... 1.25         |
| <b>Formula for making capacity limit current</b>                                                                                                   |                | 38.4 x I <sub>e</sub> |
| <b>Formula for interruption capacity limit current</b>                                                                                             |                | 32 x I <sub>e</sub>   |
| <b>Emitted mechanical power / for 4-pole three-phase motor</b><br>• at 400 V / rated value<br>• at 500 V / rated value<br>• at 690 V / rated value | kW<br>kW<br>kW | 0.37<br>0.55<br>0.75  |
| <b>Service power / at AC-3 / at 400 V / rated value</b>                                                                                            | W              | 370                   |
| <b>Frequency of operation / at AC-41 / according to IEC 60947-6-2 / maximum</b>                                                                    | 1/h            | 750                   |
| <b>Frequency of operation / at AC-43 / according to IEC 60947-6-2 / maximum</b>                                                                    | 1/h            | 250                   |

|                                                      |     |            |
|------------------------------------------------------|-----|------------|
| <b>Off-load operating frequency</b>                  | 1/h | 3,600      |
| <b>Mechanical operating cycles as operating time</b> |     |            |
| • of the main contacts / typical                     |     | 10,000,000 |
| • of the auxiliary contacts / typical                |     | 10,000,000 |
| • of the signal contacts / typical                   |     | 10,000,000 |

#### Control circuit:

|                                   |    |     |
|-----------------------------------|----|-----|
| <b>type of voltage</b>            |    | AC  |
| <b>Control supply voltage / 1</b> |    |     |
| • for DC                          |    |     |
| • initial rated value             | V  | 110 |
| • final rated value               | V  | 240 |
| • at 50 Hz / for AC               |    |     |
| • initial rated value             | V  | 110 |
| • final rated value               | V  | 240 |
| • at 60 Hz / for AC               |    |     |
| • initial rated value             | V  | 110 |
| • final rated value               | V  | 240 |
| <b>Holding power</b>              |    |     |
| • for AC / maximum                | W  | 6   |
| • for DC / maximum                | W  | 5.1 |
| <b>Switch-off delay time</b>      | ms | 50  |
| <b>Start-up delay time</b>        | ms | 70  |

#### Auxiliary circuit:

|                                                                                                      |   |         |
|------------------------------------------------------------------------------------------------------|---|---------|
| <b>Product extension</b>                                                                             |   |         |
| • auxiliary switch                                                                                   |   | Yes     |
| <b>Number of NC contacts</b>                                                                         |   |         |
| • for auxiliary contacts                                                                             |   | 1       |
| <b>Number of NO contacts</b>                                                                         |   |         |
| • for auxiliary contacts                                                                             |   | 1       |
| • of the non-delayed short-circuit release / for alarm contact                                       |   | 1       |
| <b>Number of changeover contacts / of the current-dependent overload release / for alarm contact</b> |   | 1       |
| <b>Operating current / of the auxiliary contacts / at AC-12</b>                                      |   |         |
| • maximum                                                                                            | A | 10      |
| <b>Electrical switching cycle as operating time / of the auxiliary contacts</b>                      |   |         |
| • at AC-15 / at 6 A / at 230 V / typical                                                             |   | 500,000 |
| • at DC-13 / at 6 A / at 24 V / typical                                                              |   | 100,000 |

|                                                                                            |  |         |
|--------------------------------------------------------------------------------------------|--|---------|
| <b>Electrical switching cycle as operating time / of the signal contacts</b>               |  |         |
| <ul style="list-style-type: none"> <li>• at AC-15 / at 6 A / at 230 V / typical</li> </ul> |  | 500,000 |
| <ul style="list-style-type: none"> <li>• at DC-13 / at 6 A / at 24 V / typical</li> </ul>  |  | 100,000 |

### Short-circuit:

|                                                                                       |  |                  |
|---------------------------------------------------------------------------------------|--|------------------|
| <b>Design of the fuse link / for short-circuit protection of the auxiliary switch</b> |  |                  |
| <ul style="list-style-type: none"> <li>• required</li> </ul>                          |  | fuse gL/gG: 10 A |

### Installation/mounting/dimensions:

|                          |    |                            |
|--------------------------|----|----------------------------|
| <b>Type of mounting</b>  |    | screw and snap-on mounting |
| <b>Width</b>             | mm | 45                         |
| <b>Height</b>            | mm | 170                        |
| <b>Depth</b>             | mm | 165                        |
| <b>mounting position</b> |    | any                        |

### Connections:

|                                                                                                                                                        |  |                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------|
| <b>Product function</b>                                                                                                                                |  |                                                                 |
| <ul style="list-style-type: none"> <li>• removable terminal for main circuit</li> </ul>                                                                |  | Yes                                                             |
| <ul style="list-style-type: none"> <li>• removable terminal for auxiliary and control circuit</li> </ul>                                               |  | Yes                                                             |
| <b>Design of the electrical connection</b>                                                                                                             |  |                                                                 |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>                                                                           |  | screw-type terminals                                            |
| <ul style="list-style-type: none"> <li>• for auxiliary and control current circuit</li> </ul>                                                          |  | screw-type terminals                                            |
| <b>Type of the connectable conductor cross-section</b>                                                                                                 |  |                                                                 |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>• solid</li> </ul> </li> </ul>                       |  | 2x (1.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>          |
| <ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> |  | 2x (1.5 ... 6 mm <sup>2</sup> )                                 |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>• solid</li> </ul> </li> </ul>                  |  | 0.5 ... 4 mm <sup>2</sup> , 2x (0.5 ... 2.5 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> |  | 0.5 ... 2.5 mm <sup>2</sup> , 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| <ul style="list-style-type: none"> <li>• for AWG conductors <ul style="list-style-type: none"> <li>• for main contacts</li> </ul> </li> </ul>          |  | 2x (16 ... 10), 1x 8                                            |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul>                                                                             |  | 2x (20 ... 14)                                                  |

### Certificates/approvals:

|                                    |  |                    |
|------------------------------------|--|--------------------|
| <b>Verification of suitability</b> |  | IEC / EN 60947-6-2 |
|------------------------------------|--|--------------------|

|                                 |            |                                                |
|---------------------------------|------------|------------------------------------------------|
| <b>General Product Approval</b> | <b>EMC</b> | <b>Functional Safety / Safety of Machinery</b> |
|---------------------------------|------------|------------------------------------------------|



CCC



CSA



GOST



UL



C-TICK



VDE

|                          |                          |
|--------------------------|--------------------------|
| <b>Test Certificates</b> | <b>Shipping Approval</b> |
|--------------------------|--------------------------|

[Type Test Certificates/Test Report](#)



BUREAU VERITAS



DNV



PRS



RINA

|              |
|--------------|
| <b>other</b> |
|--------------|

[Declaration of Conformity](#)

[other](#)

[Environmental Confirmations](#)

### UL/CSA ratings:

|                                                                                   |    |                                                                                                     |
|-----------------------------------------------------------------------------------|----|-----------------------------------------------------------------------------------------------------|
| <b>yielded mechanical performance (hp) / for three-phase squirrel cage motors</b> |    |                                                                                                     |
| • at 460/480 V / rated value                                                      | hp | 0.5                                                                                                 |
| • at 575/600 V / rated value                                                      | hp | 0.5                                                                                                 |
| <b>Operating current (FLA) / for three-phase squirrel cage motors</b>             |    |                                                                                                     |
| • at 480 V / rated value                                                          | A  | 1.25                                                                                                |
| • at 600 V / rated value                                                          | A  | 1.25                                                                                                |
| <b>Contact rating designation / for auxiliary contacts / according to UL</b>      |    | contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300 |

### Reliability figures:

|                                                                                        |     |             |
|----------------------------------------------------------------------------------------|-----|-------------|
| <b>B10 value</b>                                                                       |     | 3,000,000   |
| <b>Proportion of dangerous failures</b>                                                | %   | 50          |
| <b>Proportion of dangerous failures / with low demand rate / according to SN 31920</b> | %   | 40          |
| <b>Protection against electrical shock</b>                                             |     | finger-safe |
| <b>Failure rate (FIT value) / with low demand rate / according to SN 31920</b>         | FIT | 100         |

### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**




<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RA6120-1BP32/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA6120-1BP32](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6120-1BP32)

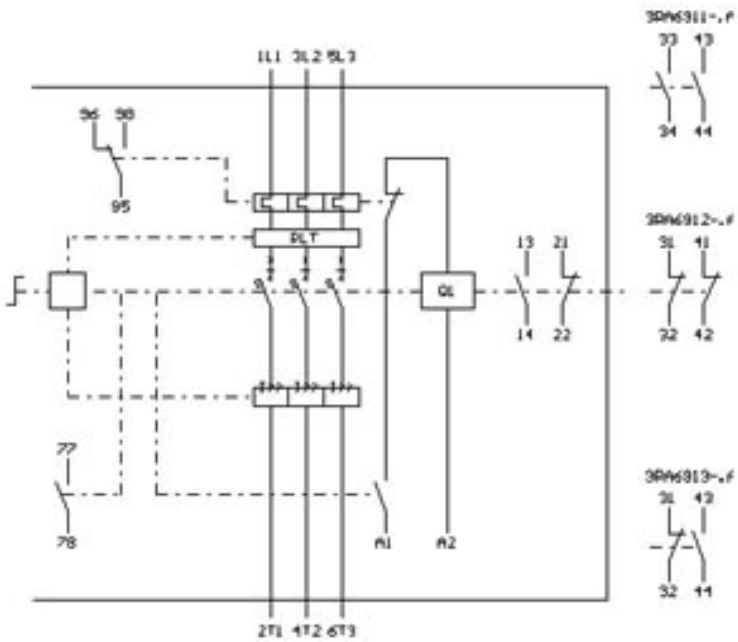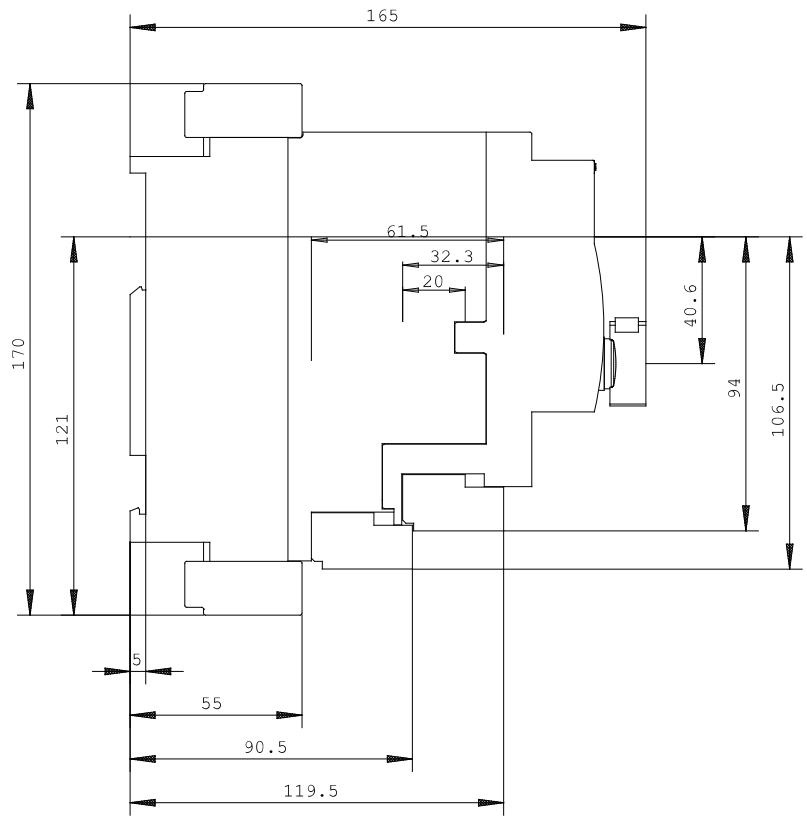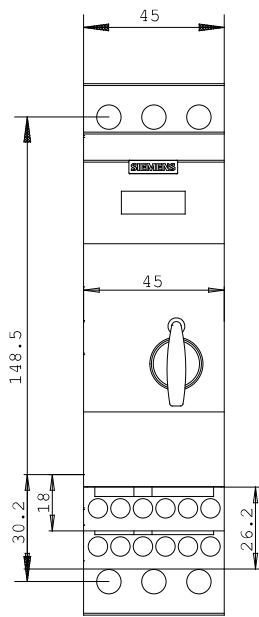

last change:

Dec 17, 2012