


**DV M TT 255 FM (951 315)**


- Prewired spark-gap-based type 1 and type 2 combined lightning current and surge arrester consisting of a base part and plug-in protection modules
- Maximum system availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipmen



Figure without obligation



Basic circuit diagram DV M TT 255 FM

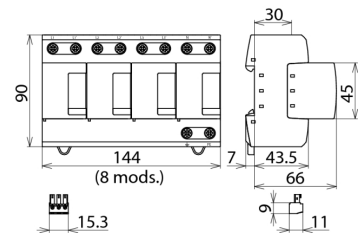

Dimension drawing DV M TT 255 FM

Modular combined lightning current and surge arrester for TT and TN-S systems ("3+1" circuit).

Type	DV M TT 255 FM
Part No.	951 315
SPD according to EN 61643-11 / IEC 61643-11	type 1 + type 2 / class I + class II
Energy coordination with terminal equipment (≤ 5m)	type 1 + type 2 + type 3
Nominal a.c. voltage (U <sub>N</sub> )	230 / 400 V (50 / 60 Hz)
Max. continuous operating a.c. voltage [L-N] (U <sub>C</sub> )	264 V (50 / 60 Hz)
Max. continuous operating a.c. voltage [N-PE] (U <sub>C(N-PE)</sub> )	255 V (50 / 60 Hz)
Lightning impulse current (10/350 μs) [L1+L2+L3+N-PE] (I <sub>total</sub> )	100 kA
Specific energy [L1+L2+L3+N-PE] (W/R)	2.50 MJ/ohms
Lightning impulse current (10/350 μs) [L-N]/[N-PE] (I <sub>imp</sub> )	25 / 100 kA
Specific energy [L-N]/[N-PE] (W/R)	156.25 kJ/ohms / 2.50 MJ/ohms
Nominal discharge current (8/20 μs) [L-N]/[N-PE] (I <sub>n</sub> )	25 / 100 kA
Voltage protection level [L-N]/[N-PE] (U <sub>p</sub> )	≤ 1.5 / ≤ 1.5 kV
Follow current extinguishing capability [L-N]/[N-PE] (I <sub>n</sub> )	50 kA <sub>rms</sub> / 100 A <sub>rms</sub>
Follow current limitation / Selectivity	no tripping of a 20 A gL/gG fuse up to 50 kA <sub>rms</sub> (prosp.)
Response time (t <sub>A</sub> )	≤ 100 ns
Max. backup fuse (L) up to I <sub>k</sub> = 50 kA <sub>rms</sub>	315 A gL/gG
Max. backup fuse (L-L')	125 A gL/gG
Temporary overvoltage (TOV) [L-N] (U <sub>T</sub> ) – Characteristic	440 V / 120 min. – withstand
Temporary overvoltage (TOV) [N-PE] (U <sub>T</sub> ) – Characteristic	1200 V / 200 ms – withstand
Operating temperature range [parallel] / [series] (T <sub>U</sub> )	-40 °C ... +80 °C / -40 °C ... +60 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (L1, L1', L2, L2', L3, L3', N, N', PE, ⚡) (min.)	10 mm <sup>2</sup> solid / flexible
Cross-sectional area (L1, L2, L3, N, PE) (max.)	50 mm <sup>2</sup> stranded / 35 mm <sup>2</sup> flexible
Cross-sectional area (L1', L2', L3', N', ⚡) (max.)	35 mm <sup>2</sup> stranded / 25 mm <sup>2</sup> flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	8 module(s), DIN 43880
Approvals	KEMA, VDE, UL, VdS
Type of remote signalling contact	changeover contact
a.c. switching capacity	250 V / 0.5 A
d.c. switching capacity	250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm <sup>2</sup> solid / flexible
Extended technical data:	Use in switchgear installations with prospective short-circuit currents of more than 50 kA <sub>rms</sub> (tested by the German VDE)
– Maximum prospective short-circuit current	100 kA <sub>rms</sub> (220 kA <sub>peak</sub> )
– Limitation / Extinction of mains follow currents	up to 100 kA <sub>rms</sub> (220 kA <sub>peak</sub> )
– Max. backup fuse (L) up to I <sub>k</sub> = 100 kA <sub>rms</sub>	315 A gL/gG
Weight	1,28 kg
Customs tariff number	85363030
GTIN	4013364108189
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.