

OVERLOAD RELAY 12.5...50 A FOR MOTOR PROTECTION SIZE S2, CLASS 10E FOR MOUNTING ONTO CONTACTORS MAIN CIRCUIT: SCREW TERMINAL AUX. CIRCUIT: SCREW TERMINAL MANUAL-AUTOMATIC-RESET



Figure similar

product brand name	SIRIUS
Product designation	solid-state overload relay

General technical data:

Size of overload relay	S2
Size of contactor can be combined company-specific	S2
Active power loss total typical	1.8 W
Insulation voltage with degree of pollution 3 Rated value	690 V
Surge voltage resistance Rated value	6 kV
Protection class IP	
• on the front	IP20
• of the terminal	IP00
Shock resistance	
• acc. to IEC 60068-2-27	15g / 11 ms
Vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
Recovery time	
• after overload trip with automatic reset typical	3 min
• after overload trip with remote-reset	0 min
• after overload trip with manual reset	0 min

Type of assignment	2
Type of protection	II (2) G [Ex e] [Ex d] [Ex px] II (2) D [Ex t] [Ex p]
Certificate of suitability relating to ATEX	PTB 09 ATEX 3001
Protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529
Equipment marking acc. to DIN EN 81346-2	F

Ambient conditions:

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
• during transport	-40 ... +80 °C
Temperature compensation	60 ... -25 °C
Relative humidity during operation	0 ... 95 %

Main circuit:

Number of poles for main current circuit	3
Adjustable response value current of the current-dependent overload release	12.5 ... 50 A
Operating voltage	
• Rated value	690 V
• at AC-3 Rated value maximum	690 V
Operating frequency Rated value	50 ... 60 Hz

Auxiliary circuit:

Design of the auxiliary switch	integrated
Number of NC contacts	
• for auxiliary contacts	1
— Note	for contactor disconnection
Number of NO contacts	
• for auxiliary contacts	1
— Note	for message "tripped"
Number of CO contacts	
• for auxiliary contacts	0
Operating current of the auxiliary contacts at AC-15	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
Operating current of the auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.55 A

- at 110 V 0.3 A
- at 125 V 0.3 A
- at 220 V 0.11 A

Protective and monitoring functions:

Trip class	CLASS 10E
Design of the overload release	electronic
Response time of the ground fault protection in settled state	1 000 ms

UL/CSA ratings:

Full-load current (FLA) for three-phase AC motor	
• at 480 V Rated value	50 A
• at 600 V Rated value	50 A
Contact rating of the auxiliary contacts acc. to UL	B600 / R300

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the main circuit — required	Fuse gG: 200 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A

Installation/ mounting/ dimensions:

mounting position	any
Mounting type	direct mounting
Height	99 mm
Width	55 mm
Depth	104 mm
Required spacing	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— Backwards	0 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— Backwards	0 mm

— upwards	10 mm
— downwards	10 mm
— at the side	10 mm

Connections/ Terminals:

Product function	
<ul style="list-style-type: none"> removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	
<ul style="list-style-type: none"> for main current circuit for auxiliary and control current circuit 	screw-type terminals screw-type terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Type of connectable conductor cross-section	
<ul style="list-style-type: none"> for main contacts <ul style="list-style-type: none"> single or multi-stranded finely stranded with core end processing for AWG conductors for main contacts 	1x (1 ... 50 mm ²), 2x (1 ... 35 mm ²) 1x (1 ... 35 mm ²), 2x (1 ... 25 mm ²) 2x (18 ... 2), 1x (18 ... 1)
Type of connectable conductor cross-section	
<ul style="list-style-type: none"> for auxiliary contacts <ul style="list-style-type: none"> single or multi-stranded finely stranded with core end processing for AWG conductors for auxiliary contacts 	1x (0,5 ... 4 mm ²), 2x (0,5 ... 2,5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 14), 2x (20 ... 14)
Tightening torque	
<ul style="list-style-type: none"> for main contacts with screw-type terminals for auxiliary contacts with screw-type terminals 	3 ... 4.5 N·m 0.8 ... 1.2 N·m
Design of screwdriver shaft	Diameter 5 to 6 mm
Design of the thread of the connection screw	
<ul style="list-style-type: none"> for main contacts of the auxiliary and control contacts 	M6 M3

Safety related data:

Proportion of dangerous failures	
<ul style="list-style-type: none"> with low demand rate acc. to SN 31920 	35 %

Communication/ Protocol:

Protocol is supported	
<ul style="list-style-type: none"> IO-Link protocol 	No
Type of voltage supply via input/output link master	No

Electromagnetic compatibility:






Conducted interference due to burst acc. to IEC 61000-4-4	2 kV (power ports), 1 kV (signal ports)
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5	2 kV (line to ground)

Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV (line to line)
Conducted interference due to high-frequency radiation acc. to IEC 61000-4-6	10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge

Display:

Display version <ul style="list-style-type: none"> • for switching status 	Slide switch
---	--------------

Certificates/ approvals:

General Product Approval	For use in hazardous locations	Declaration of Conformity	Test Certificates
 CSA	 EAC	 UL	 ATEX
			 EG-Konf.
			Typprüfbescheinigung/Werkszeugnis

other

[Bestätigungen](#)
[Umweltbestätigung](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB30361UB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB30361UB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB30361UB0&lang=en

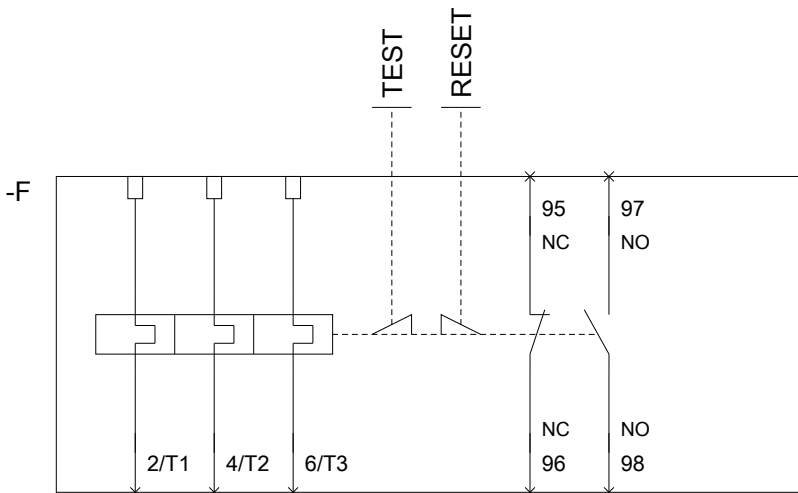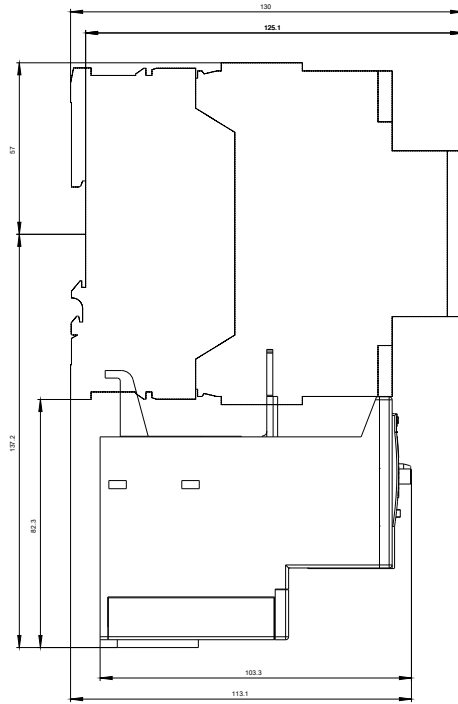

last modified:

10.08.2015