THIS DRAWING IS UNPUBLIDHED. RELEASED FOR PUBLICATION ,1997 .
© COPYRIGHT 1997 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
DS	

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	RELEASED ECN(FC00-0008-02)	16,JAN,02	JW	CS
	A	REVISED ECN(FC00-0119-02)	26,AUG,02	JW	CS

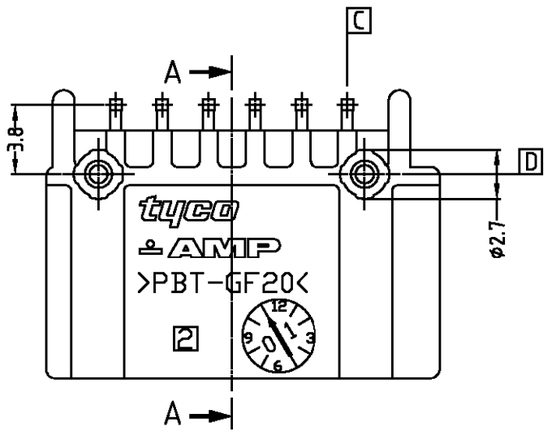

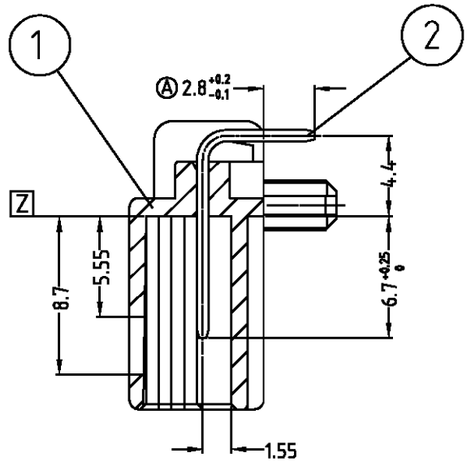

A-A

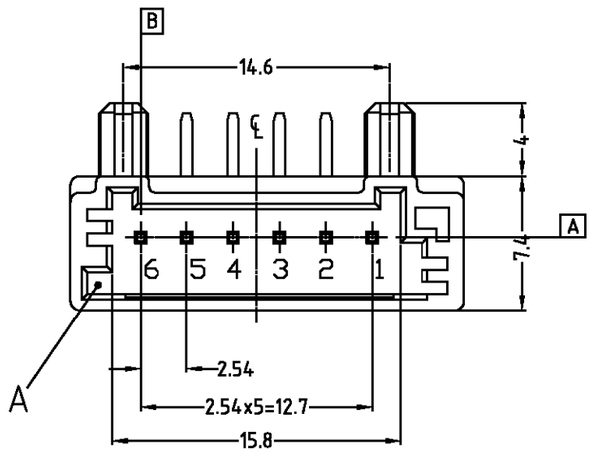

P.C.B LAYOUT

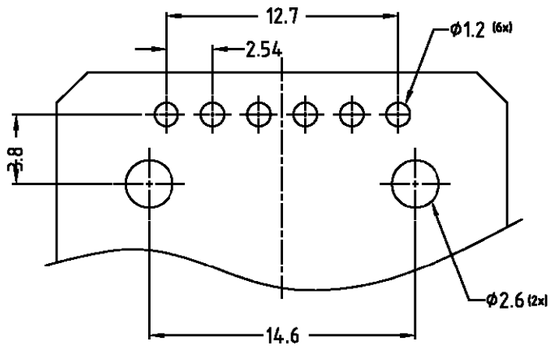

(TABLE 1) SCALE 2 : 1

CODE A : TBD



CODE B : 0-936288-2



CODE C : TBD

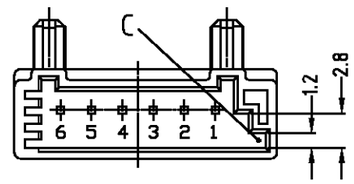

CODE D : TBD

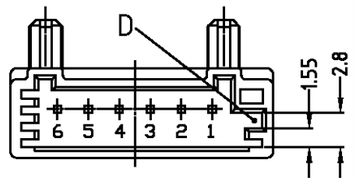

NOTE.
1. PULL-OUT FORCE OF THE CONTACT : Min 25N WHEN V = 25mm/min.
2. BE MATED WITH PLUG HSG (P/N : 936289) SMOOTHLY.
3. CODE IS AS FOLLOWS : SEE TABLE 1

NO	DESCRIPTION	PART NO.	MATERIAL	COLOR/FINISH	CODE	REV.	ASS'Y FOR Q'TY (TBD)	(TBD)	(0-936287-2)	(TBD)
2	.063 SQUARE CONTACT PIN FOR MQS 6Pos.	0-936828-1	PHOSPHOR BRONZE	POST TIN/LEAD	-	A	6	6	6	6
	MQS. PIN HEADER, 6Pos. (CODING : D)	TBD	PBT GF 20	BLACK	D	0	1			
	MQS. PIN HEADER, 6Pos. (CODING : C)	TBD		BLACK	C			1		
1	MQS. PIN HEADER, 6Pos. (CODING : B)	0-936288-2		NATURAL	B				1	
	MQS. PIN HEADER, 6Pos. (CODING : A)	TBD		BLACK	A					1

THIS DRAWING IS CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm

3rd ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 <XX<10 ± 0.2
10<XX<30 ± 0.25
30<XX ± 0.3
ANGLES ± 3°

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN JW JUNG
CHK BM JANG
APVD CS LEE
PRODUCT SPEC ---
APPLICATION SPEC ---
WEIGHT ---

tyco Electronics
AMP KOREA.
kyungsan, korea

NAME: MQS, PIN HEADER ASS'Y 6Pos.

SIZE: A3 | CAGE CODE: 00779 | DRAWNING NO: C- 936287

SCALE 3 : 1 | SHEET 1 OF 1 | REV A

AMP 1470-19 REV 09MAY94