

NETGEAR®

WiFi Booster for Mobile WN1000RP User Manual



350 East Plumeria Drive
San Jose, CA 95134
USA

November 2012
202-10990-02
v1.0

© NETGEAR, Inc. All rights reserved.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of NETGEAR, Inc.

Technical Support

Thank you for choosing NETGEAR. To register your product, get the latest product updates, get support online, or for more information about the topics covered in this manual, visit the Support website at <http://support.netgear.com>.

Phone (US & Canada only): 1-888-NETGEAR

Phone (Other Countries): Check the list of phone numbers at http://support.netgear.com/app/answers/detail/a_id/984

Trademarks

NETGEAR, the NETGEAR logo, and Connect with Innovation are trademarks and/or registered trademarks of NETGEAR, Inc. and/or its subsidiaries in the United States and/or other countries. Information is subject to change without notice. Other brand and product names are registered trademarks or trademarks of their respective holders. © NETGEAR, Inc. All rights reserved.

Statement of Conditions

To improve internal design, operational function, and/or reliability, NETGEAR reserves the right to make changes to the products described in this document without notice. NETGEAR does not assume any liability that may occur due to the use, or application of, the product(s) or circuit layout(s) described herein.

Table of Contents

Chapter 1 Getting Started

How the Booster Works	5
When to Use Your Booster	5
Hardware Features	6
Install the Booster	7
Position the Booster	8
Performance	9

Chapter 2 Network Settings

Log In to the Booster	11
Use NETGEAR genie after Installation	12
Add a WPS Client to the Booster WiFi Network	13
Setup Menu	14
Connect the Booster to an Existing Wireless Network	14
Booster Wireless Settings	15
Booster IP Address Setup	18
Maintenance Settings	19
Status Screen	19
Attached Devices	21
Back Up and Manage Booster Settings	21
Set the Password	22
Upgrade the Firmware	23
Advanced Settings	23
Advanced Wireless Settings	23

Chapter 3 Troubleshooting

Frequently Asked Questions	27
Connecting to http://www.mywifiext.net	28
Joining WiFi Networks	29

Appendix A Supplemental Information

Factory Settings	30
Technical Specifications	31

Appendix B Compliance Notification

Getting Started

1

This chapter covers the following topics:

- *How the Booster Works*
- *Hardware Features*
- *Install the Booster*
- *Position the Booster*
- *Performance*

For more information about the topics covered in this manual, visit the support website at <http://support.netgear.com>.

How the Booster Works

The booster works like a bridge between a WiFi router and a computer or wireless device outside the wireless router's range. The booster has two main jobs:

1. The booster connects to a WiFi network.

When the booster connects wirelessly to a network, it acts as a network client. This is similar to how a computer connects to a network.

2. The booster acts as an access point for computers.

The booster has its own wireless network called NETGEAR_EXT that wireless computers can join. In its role as an access point, the booster performs tasks that wireless routers do, such as broadcasting its network name (SSID).

The booster needs to do each of these jobs so that both ends of the bridge are in place.

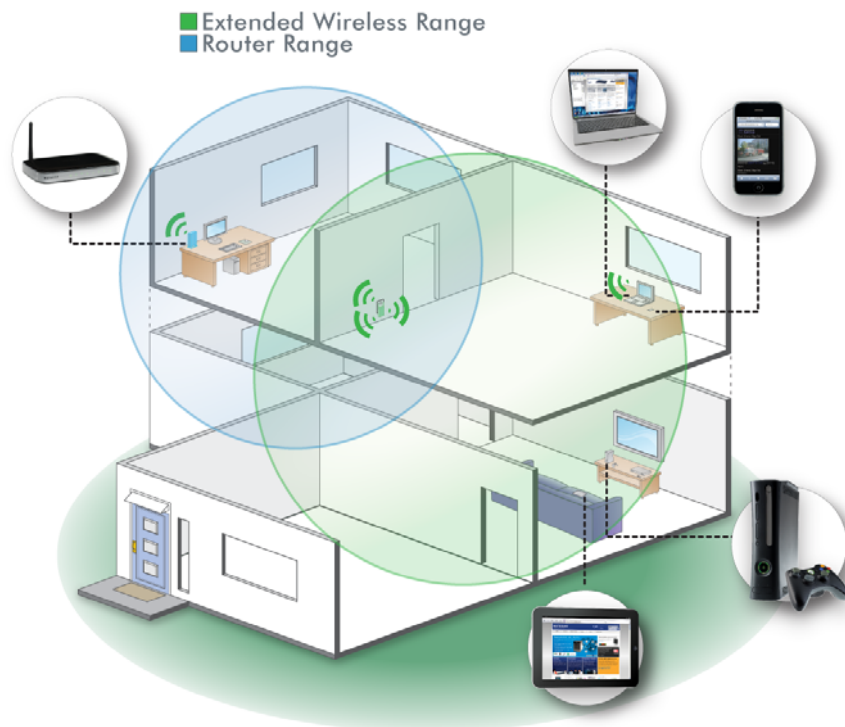






Figure 1. Booster in a home

When to Use Your Booster

NETGEAR recommends that you connect to the booster only when your home network connection is poor. Because data traffic routed through the booster is inherently slower than traffic routed directly from the network, the computer should stay on the network if the connection is good enough. NETGEAR recommends that you connect through the booster network only when the computer is in a "dead zone" where connection from the network is very poor or non-existent.

The booster LEDs can help you tell if the booster is correctly set up and working as it should.

- The best performance is delivered when the Link Rate LED  or  and the Wireless Device to Booster LED  are green.
- A workable performance is delivered when the Link Rate LED is amber and the Wireless Device to Booster LED  is green.

Hardware Features

The following figure shows the booster.

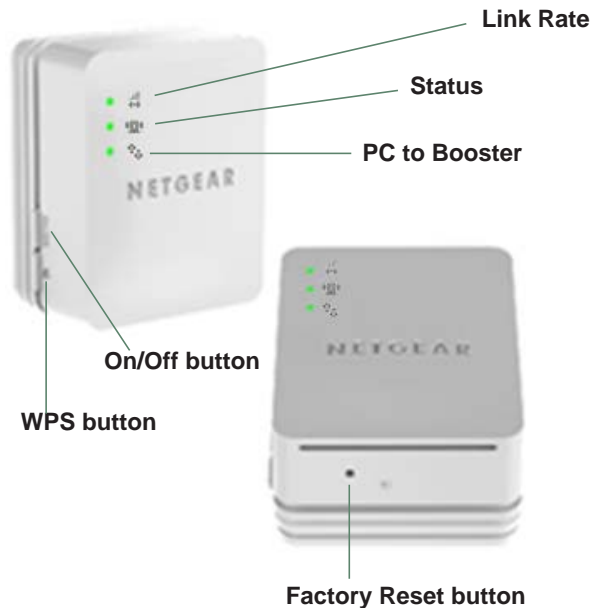






Figure 2. Booster

The LEDs on the front show how the booster is working:

-  **Link Rate.** This LED indicates a wireless connection between the booster and the router.
Green is best.
Amber is good.
Red is poor.
-  **Status.** This LED is lit when the booster is powered on.
-  **PC to Booster.** The LED is lit when the booster is connected to a computer.

The side panel has the following features:

- **On/Off button.** Turns the device on and off.
-  **WPS button.** Press the **WPS** button to wirelessly connect the booster to your router or wireless adapter.


The bottom of the booster has the following feature:

- **Factory Reset button.** To use this button, stick a paper clip into the reset hole and hold it until the Status LED blinks. Then release the button.


Install the Booster


➤ To install the booster:

- 1 Either connect the AC plug, or attach the stand and the power adapter cord.
- 2 Find a place to install the booster that is about halfway between the router and the computer or wireless device that is outside of the range of the router.

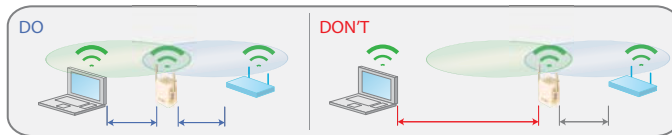


If you have to use a different location, see [Position the Booster](#) on page 8.

- 3 Power up the booster.
 - If you connected the AC plug to the booster, plug it directly into an electrical outlet.
 - If you attached the stand and power adapter, plug the power adapter into an electrical outlet.
- 4 Wait until the Power LED  turns green.
- 5 Use a computer or wireless device to connect to the booster. During installation, it might be easier to use a computer or device that is in the same room as the booster.
 - For a wired connection, connect your computer or wireless device to the booster with an Ethernet cable.
 - For a wireless connection, use a WiFi network manager to find and connect to **NETGEAR_EXT** (the SSID) wireless network.

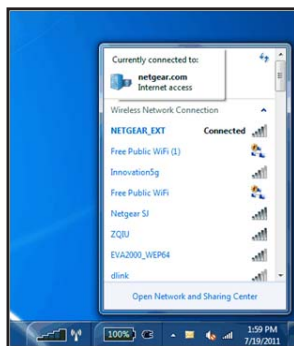


Tip: You can use any WiFi network manager utility on a computer or tablet to find and connect to the booster wireless network.

After the connection with the computer is established, the Wireless Device to Booster LED  turns green.

- 6 On your computer or wireless device, launch an Internet browser.

The browser displays the genie screen.

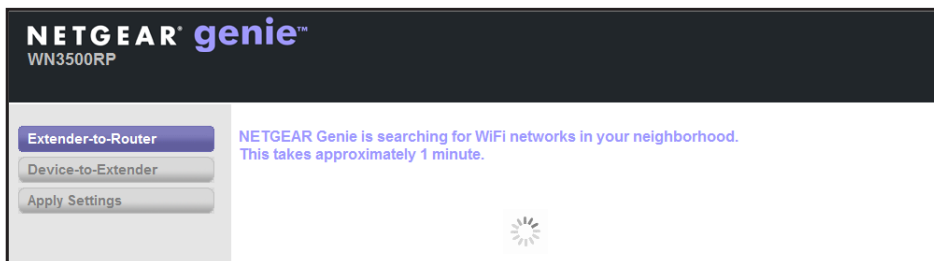

If you do not see the genie screen, type <http://www.mywifiext.net> in the address field of your browser.

The genie scans for wireless networks in your area.

- 7 Follow the genie steps to set up the booster to work with your network and to set up your computer or wireless device to connect to the booster network.


These steps are explained in *Use NETGEAR genie after Installation* on page 12.

Position the Booster

The best connection is established when there is a clear line of sight between the booster and the router and between the booster and the computer or wireless device. If this straight path is blocked by a thick wall or other materials, move the booster to a different location half-way between the computer and the router.


If the Link Rate LED is green or amber and the Wireless Device to Booster LED is green, the booster is working as expected.

➤ To place the booster and apply power:

- 1 Place the booster an equal distance between your router and the wireless device located outside the range of your router.
- 2 Plug the booster into an electrical outlet, and wait 1 minute until the Power LED  turns green.
 - If you have to use a different location, move the booster closer to the device, but still within the wireless range of the router.
 - During installation, you can put the booster in the same room as the router. After you complete installation, you can move the booster to a location that is halfway between the router and your computer, and the booster is still displaying a green link rate.

➤ To improve the Link Rate LED from red or amber to green:


- 1 If the Link Rate LED is red, move the booster closer to the router or to a different spot where it provides a better line of sight.

- 2 As you move the booster, check the LEDs until you find a location where the Link Rate LED is green or amber, and the Wireless Device to Booster LED  is green.
- 3 You might have to unplug the booster as you move it to a different location. If you do, from the new location, power up the booster and continue to check the LEDs.

Once the LEDs show that the booster is in a good location, open a browser and go to <http://www.mywifiext.net> to continue the setup process.

Performance

The Link Rate LEDs indicate the performance of the  2.4-GHz or  5-GHz wireless connection from the booster to a router.

- The best performance is delivered when the Link Rate LED is green.
- A workable performance is delivered when the Link Rate LED is amber.
- A red Link Rate LED indicates a poor connection or no connection between the booster and the router.
- Make sure that your  Wireless Device to Booster LED is green before you check the Link Rate LED for performance.

➤ To improve booster performance:

- 1 Move the booster closer to the router or to a different location with a better line of sight.
- 2 As you move the booster, check the Link Rate and the Wireless Device to Booster LEDs on the booster until you find a good location. These LEDs should remain solid green.

2 Network Settings

2

This chapter covers the following topics:

- *Log In to the Booster*
- *Use NETGEAR genie after Installation*
- *Add a WPS Client to the Booster WiFi Network*
- *Setup Menu*
- *Maintenance Settings*
- *Advanced Settings*

Log In to the Booster

You can log in to the booster to use NETGEAR genie or to use the menu selections to view or change the booster's settings.

➤ To log in:

1. Launch an Internet browser such as Mozilla Firefox or Microsoft Internet Explorer.
2. In the address field of your browser, enter **http://www.mywifiext.net**. You are prompted to enter a user name and password.

If you do not see the log in prompt, make sure to include *http://* when you type **http://www.mywifiext.net** in your browser.

3. Type **admin** for the user name. The default password is **password**. NETGEAR recommends that you set a more secure password after you log in (see *Set the Password* on page 22).
 - If your booster has an Internet connection, the Firmware Update screen displays (see *Upgrade the Firmware* on page 22), and the software checks for new firmware at the NETGEAR website.
 - The Status screen displays with the menu on the left. This screen shows what the current settings are for the booster.

Status	
Hardware Version	wn1000rp
Firmware Version	V1.0.0.20
GUI Language Version	V1.0.0.0
Connection Status to Existing Network	
Name (SSID)	MyHomeNetwork
Connection Status	Connected
Link Rate	6Mbps
Extender IP Info	
MAC Address	00:8E:F2:52:FD:C8
IP Address	100.10.0.52
DHCP Client	ON
IP Subnet Mask	255.255.255.0
Gateway IP Address	100.10.0.10
Domain Name Server	168.95.1.1
Extender Wireless Setting	
Name (SSID)	MyHomeNetwork_EXT
Region	United States
Channel	auto(11)
Wireless AP	ON
Broadcast Name	ON
Wi-Fi Protected Setup	Configured

If you have trouble connecting:

- If you connect an Ethernet cable to the booster, and launch your browser quickly, the computer might still need a couple of minutes to recognize the Ethernet LAN connection before you can connect.
- Make sure that your Ethernet cable is securely connected to the booster and the computer, and that the booster LAN LED is on. If the LED is not lit, reconnect the Ethernet cable, and relaunch your Internet browser.

Use NETGEAR genie after Installation

NETGEAR genie can help you set up your booster to connect to a wireless network. During installation, when you launch your Internet browser, NETGEAR genie automatically displays.

➤ After installation, to use genie again:

1. Log in to the booster.

Note: Once you begin using genie, you have to complete all of its steps before you can exit.

2. Select **Setup Wizard**.

The software detects wireless networks in your area and displays a list:

Select the name of your 2.4GHz WiFi network.

	SSID	Channel	Signal	Security
<input type="radio"/>	ngwlan	11	69%	WPAWPA2-PSK
<input type="radio"/>	NETGEAR	6	68%	OFF
<input type="radio"/>	NETGEAR71	6	67%	WPA2-PSK
<input type="radio"/>	NETGEAR-3G	11	63%	OFF
<input type="radio"/>	NG_11g-2	1	63%	OFF
<input type="radio"/>	24023Validation_g	2	63%	WPAWPA2-PSK
<input type="radio"/>	24023Validation_g1	2	63%	WPA2-PSK
<input type="radio"/>	qHub	6	61%	WPA2-PSK
<input type="radio"/>	ngwlan	1	61%	WPAWPA2-PSK
<input type="radio"/>	ngguest	1	60%	WPAWPA2-PSK
<input type="radio"/>	veriwaveRemoteAP_g	2	60%	WPA2-PSK
<input type="radio"/>	ngwlan	7	58%	WPAWPA2-PSK
<input type="radio"/>	STB1000-24G	6	58%	WPA2-PSK
<input type="radio"/>	ngwlan	5	58%	WPAWPA2-PSK
<input type="radio"/>	netgear-1	6	57%	OFF
<input type="radio"/>	24023Validation_g1	5	49%	WPA2-PSK
<input type="radio"/>	NETGEAR-3G	6	47%	OFF
<input type="radio"/>	veriwaveRemoteAP_g	5	46%	WPA2-PSK
<input type="radio"/>	iHub_00603503a2ec	6	43%	WPA2-PSK
<input type="radio"/>	24023Validation_g	5	41%	WPAWPA2-PSK
<input type="radio"/>	NETGEAR_11g	6	31%	OFF
<input type="radio"/>	ngguest	7	24%	WPAWPA2-PSK
<input type="radio"/>	Manually input my wireless SSID			

- 3 Either select a network from the list, or select the **Manually input my wireless SSID** radio button and type the SSID.

If the network is secure, you are prompted to enter the passphrase (network password):

Enter the security settings of the selected WiFi network

Your existing network in 5GHz:

Name (SSID): ngguest
 Security: WPA2-PSK [AES]
 Passphrase :

4. Enter the password for your wireless network and click **Continue**.

The genie sets up a WiFi connection from the booster to the router, which takes about 2 minutes. Then the following screen displays.

Extender-to-Router
Device-to-Extender
Apply Settings

Enter the settings for the Extender network.

Continue

Name (2.4G SSID)

Name (5G SSID)

Use the same security mode and password as those for the existing network.

5. Review the settings, and make sure that they are correct. Then, click **Continue**.

The Device-to-Booster settings are applied, which takes about 2 minutes. Then the following screen displays..

You are now one step away from completing the installation.

Your Extender network has been created:

Extender network (2.4GHz b/g/n): Wireless network name (SSID) : nggquest_2GEXT Security type: WPAWPA2-PSK Passphrase : ngpublic	Extender network (5GHz a/n): Wireless network name (SSID) : nggquest_5GEXT Security type: WPAWPA2-PSK Passphrase : ngpublic
---	---

Next, you will need to connect your wireless devices to the Extender network. On your wireless device (e.g. laptop, tablet, smartphone, gaming console, etc.) use the wireless manager to find the extender network names and connect. For example, you might use Windows software as shown below to connect your PC to the Extender network.

My wireless devices are connected to the Extender network. (Selecting this checkbox activates the Continue button.)

Continue

- 6 Join the booster network with your wireless computer or device.
7. Select the check box.
- 8 Click **Continue**.


Add a WPS Client to the Booster WiFi Network



WPS (Wi-Fi Protected Setup) lets you join a secure WiFi network without typing its password. Instead, you use a WPS button or enter a PIN to connect. WPS supports WPA and WPA2 wireless security.

Note: You *cannot* use the Push 'N' Connect WPS button on the booster to connect the booster to your wireless network. The WPS button on the booster can be used only to connect a computer to the booster.

➤ **To join the booster network using WPS:**

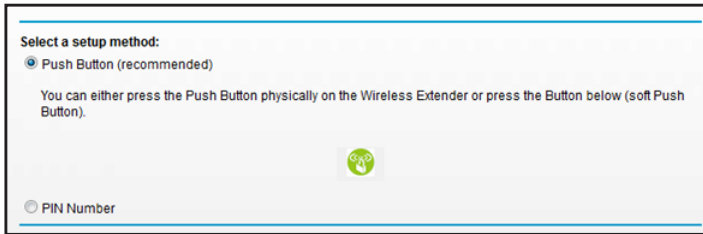1. Select **Add WPS Client**. The following screen displays:



2. Select a radio button.
 - **Push Button (recommended)**. Either click the  button or press the  **WPS** button on the front of the booster.
 - **PIN Number**. Select the radio button, and a PIN displays.

The booster tries to find the wireless client (the computer) that is attempting to join the network. If you are using a WPS button, it tries for 2 minutes. If you are using a PIN, it tries for 4 minutes.

3. Go to your wireless computer. Use its WPS software to try to connect to the booster.


Setup Menu

After initial setup, you can use the Setup Menu to view or change the settings.

Connect the Booster to an Existing Wireless Network

You can wirelessly connect the booster to your home network.

1. Select **Setup > Connect to an Existing Network**. The booster scans for wireless networks, and displays a list.

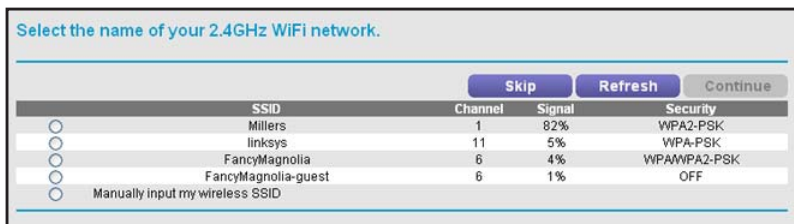

If your wireless network is not on the list, the booster might be too far away from the router. See [Position the Booster](#) on page 8 for suggestions.

2. Select the radio button for your network, and click **Continue**.

If you selected the manual option, you are prompted to type the network name (SSID) and to enter the password to access it:



3. Enter your network's password or key, and click **Continue**.

The booster joins your wireless network.


Booster Wireless Settings

You can use the Wireless Settings screen to change the network name (SSID) for the booster's network and to set up wireless security. If you do not change these settings, the network name is NETGEAR_EXT, and the network is open (no wireless security is set up).

Note: If you use a wireless computer to change the booster's wireless settings, you will be disconnected when you click Apply. To reconnect, you have to select the new network name that you created, and enter its password or wireless security key.

- **To change the wireless settings for the booster network:**

1. Select **Setup > Wireless Settings** to display the following screen:

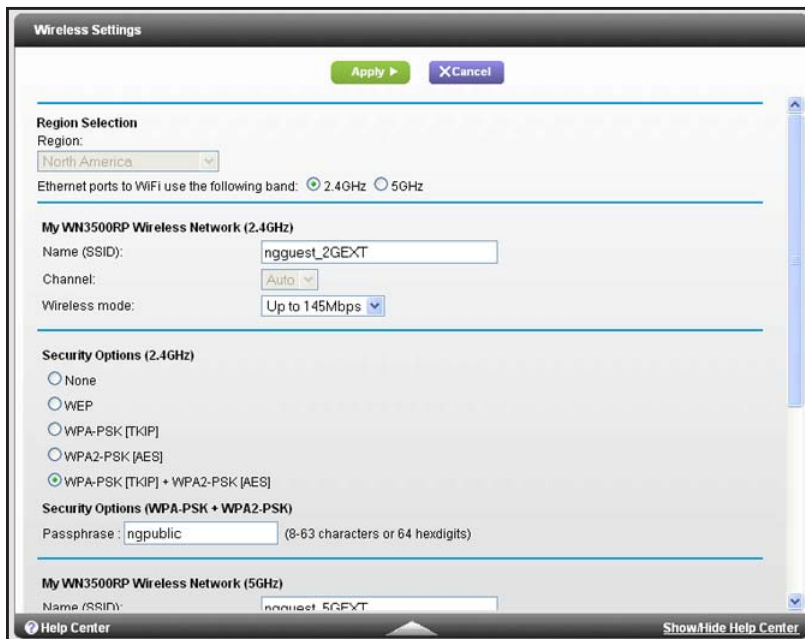

2. In the Name (SSID) field, you can type in a new name to customize your booster network. This will make it easier to identify your booster if more than one is operating in your neighborhood.
3. In the Security Options section of the screen, select the type of wireless security that you want to use on your network.
 - **None.** This is an open wireless network. Any wireless computer or device is allowed to join this network.
 - **WEP.** WEP is an older standard, and is less secure than WPA or WPA2. WEP uses encryption keys and data encryption for data security. You can select 64-bit or 128-bit encryption.
 - **WPA-PSK [TKIP].** WPA is more secure than WEP. When using wireless computers or devices that support WPA, you can enter a passphrase to join the booster wireless network.
 - **WPA2-PSK [AES].** WPA2 is even more secure, but some older computers do not support this standard. When using wireless computers or devices that support WPA2, you can enter the passphrase to join the booster wireless network.
 - **WPA-PSK [TKIP] + WPA2-PSK [AES].** When using wireless computers or devices that support either WPA or WPA2, you can enter the passphrase to join the booster wireless network.
4. Click **Apply** to save your settings.
5. Use your wireless computer to connect to the booster network with its new settings. The Smart Wizard can guide you through this process.

Set Up WPA, WPA2, or WPA + WPA2

Both WPA and WPA2 provide strong data security. WPA with TKIP can be used on Windows systems with Service Pack 2 or later. WPA2 with AES is a hardware implementation; see your device documentation before implementing it.

➤ **To configure WPA or WPA2 in the booster:**

1. On the Wireless Setting screen, select the radio button for the WPA or WPA2 option of your choice.
2. The settings displayed on the screen depend on which security option you select.
3. For WPA-PSK or WPA2-PSK, enter the passphrase.
4. Click **Apply** to save your settings.

Set Up WEP

WEP is a legacy wireless security setting. NETGEAR recommends that you use a newer standard such as WPA2 or WPA unless you have older wireless equipment that supports only WEP.

➤ **To set up WEP:**

1. In the Wireless Settings screen, in the Security Options section, select the **WEP** radio button.

2. Select the authentication type: **Automatic**, **Open System**, or **Shared Key**. The default is Open System.

Note: The authentication is separate from the data encryption. You can select authentication that requires a shared key, but still leaves data transmissions unencrypted. Security is stronger if you use both the Shared Key and WEP encryption settings.

3. Select the encryption strength setting:
 - **WEP 64-bit encryption.** Enter 10 hexadecimal digits (any combination of 0–9, a–f, or A–F).
 - **WEP 128-bit encryption.** Enter 26 hexadecimal digits (any combination of 0–9, a–f, or A–F).
4. Enter the encryption keys. You can manually or automatically program the four data encryption keys. These values have to be identical on all computers and access points in your network:
 - **Passphrase.** To use a passphrase to generate the keys, enter a passphrase, and click **Generate** to create the keys to access the booster network.

Note: Not all wireless computers support passphrase key generation. If your computer does not support the passphrase, then you will need to type the encryption key in order to join the wireless network.

- **Key 1–Key 4.** These values are *not* case-sensitive. You can manually enter the four data encryption keys. These values have to be identical on all computers and access points in your network. Enter 10 hexadecimal digits (any combination of 0–9, a–f, or A–F).
5. Select which of the four keys will be the default.


Data transmissions are always encrypted using the default key. The other keys can be used only to decrypt received data. The four entries are disabled if WPA-PSK or WPA authentication is selected.
 6. Click **Apply** to save your settings.

Booster IP Address Setup

The IP Address Setup screen shows whether the booster is set to get its IP address dynamically from the router (this is the most common setting), or is set up with a static IP address.

- **To view or change the IP address settings:**

Select **Setup > IP Address Settings**.

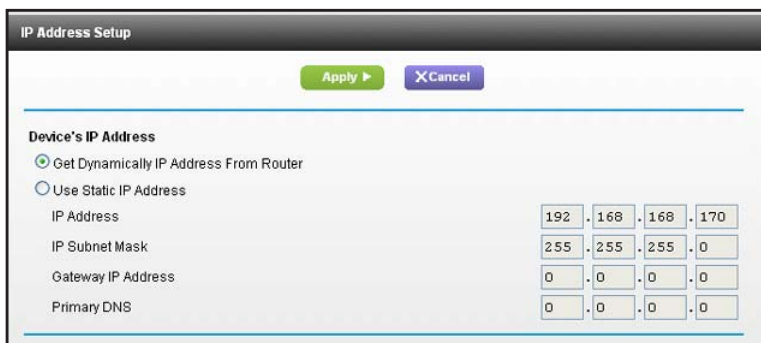

IP Address Setup

Apply Cancel

Device's IP Address

Get Dynamically IP Address From Router

Use Static IP Address

IP Address: 192 . 168 . 168 . 170

IP Subnet Mask: 255 . 255 . 255 . 0

Gateway IP Address: 0 . 0 . 0 . 0

Primary DNS: 0 . 0 . 0 . 0

The following information is displayed:

- **Get Dynamically IP Address From Router.** The wireless network router assigns an IP address when the booster connects to its wireless network. Most networks are set up so that the router automatically does this.
- **Use Static IP Address.** Specify a static IP address. This is not usually necessary. If you set this up, you should be technically experienced or have a technically experienced person help you.
 - **IP Address.** The static IP address.
 - **IP Subnet Mask.** The subnet mask associated with the IP address.
 - **Gateway IP Address.** The IP address for the gateway.
 - **Primary DNS.** The primary Domain Name Server (DNS).
 - **Secondary DNS.** The secondary Domain Name Server (DNS).

Maintenance Settings

You can use the maintenance settings to view the booster status, view attached devices, back up and restore configuration settings, set the password, and update the firmware.

Status Screen

When you connect to <http://www.mywifiext.net>, after the automatic firmware check, the Status screen displays. You can also select **Status** from the menu to display this screen:

Status	
Hardware Version	wn1000rp
Firmware Version	V1.0.0.20
GUI Language Version	V1.0.0.0
Connection Status to Existing Network	
Name (SSID)	MyHomeNetwork
Connection Status	Connected
Link Rate	6Mbps
Extender IP Info	
MAC Address	00:8E:F2:52:FD:C8
IP Address	100.10.0.52
DHCP Client	ON
IP Subnet Mask	255.255.255.0
Gateway IP Address	100.10.0.10
Domain Name Server	168.95.1.1
Extender Wireless Setting	
Name (SSID)	MyHomeNetwork_EXT
Region	United States
Channel	auto(11)
Wireless AP	ON
Broadcast Name	ON
Wi-Fi Protected Setup	Configured
<input type="button" value="Show Statistics"/>	

This screen shows the current settings and the status of your booster.

You can click **Show Statistics** to see device performance statistics such as the number of packets sent and number of packets received for each port. See [Show Statistics](#) on page 20.

The following fields are displayed in the Status screen:

- **Hardware Version.** The hardware version of the booster.
- **Firmware Version.** The current firmware version of the booster. If you upgrade the firmware, this field changes.
- **GUI Language Version.** The language version running on the booster. If you upgrade the firmware, this field changes.

Connection Status to Existing Network

- **Name (SSID).** Your booster is set up to connect to this SSID, also called the wireless name.
- **Connection Status.** The status of your wireless connection (connected or disconnected).
- **Link Rate.** The actual transmission (Tx) and receive (Rx) link rate in the current wireless connection.

Extender (Booster) IP Info

- **MAC Address.** The physical address of the booster, as seen from the local area network (LAN).
- **IP Address.** The IP address of the booster. The default is 192.168.1.250.
- **DHCP Server.** Identifies the network DHCP server on the wireless network.
- **IP Subnet Mask.** The IP subnet mask associated with the LAN IP address of the booster. The default is 255.255.255.0.
- **Gateway IP Address.** The IP address of the wireless network gateway.
- **Domain Name Server.** The IP address of the Domain Name Server (DNS) of the wireless network.

Extender (Booster) Wireless Settings

- **Name (SSID).** The name (SSID) of the wireless network.
- **Region.** The location where the booster is operating.
- **Channel.** The channel of the wireless network.
- **Wireless AP.** On or Off.
- **Broadcast Name.** On or Off.
- **Wi-Fi Protected Setup.** Configured.

Show Statistics

Scroll to the bottom of the Status screen, and click **Show Statistics**. The following screen displays:

The screenshot shows a 'Show Statistics' screen with a table of network statistics. The table has columns for Port, Status, TxPkts, RxPkts, Collisions, Tx B/s, Rx B/s, and Up Time. The data is as follows:

Port	Status	TxPkts	RxPkts	Collisions	Tx B/s	Rx B/s	Up Time
LAN1	100M/Full						00:12:08
LAN2	Link Down	16640	23002	0	9614	3361	--
LAN3	Link Down						--
LAN4	Link Down						--
WLAN 2.4G	300 Mbps	19848	11576	0	2977	2262	00:12:31
WLAN 5G	300 Mbps						

At the bottom of the screen, there is a 'Poll Interval' field set to 5 (secs), a 'Set Interval' button, and a 'Stop' button.


The screen shows statistics for the LAN (local), and wireless LAN (WLAN) ports. For each port, the screen displays the following:

- **Status.** The status of the port.
- **TxPkts.** The number of packets transmitted on this port since reset or manual clear.
- **RxPkts.** The number of packets transmitted on this port since reset or manual clear.
- **Collisions.** The number of collisions on this port since reset or manual clear.

- **Tx B/s.** The current line utilization—percentage of current bandwidth used on this port.
- **Rx B/s.** The average line utilization for this port.
- **Up Time.** The time elapsed since the last power cycle or reset.
- **Poll Interval.** Specify the poll interval frequency. If you change this value, click **Set Interval** so that your change takes effect.

Attached Devices

Select **Maintenance > Attached Devices** to display the following screen:

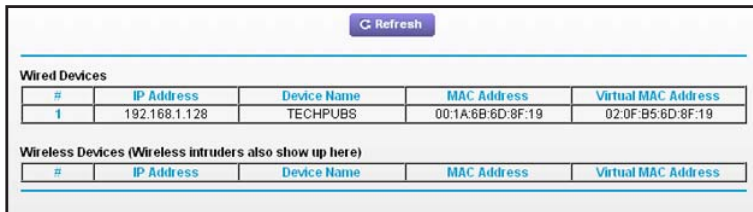

The screenshot shows a web interface with a 'Refresh' button at the top. Below it, there are two tables. The first table is titled 'Wired Devices' and has five columns: '#', 'IP Address', 'Device Name', 'MAC Address', and 'Virtual MAC Address'. It contains one row with the following data: '# 1', 'IP Address 192.168.1.128', 'Device Name TECHPUBS', 'MAC Address 00:1A:6B:6D:8F:19', and 'Virtual MAC Address 02:0F:B5:6D:8F:19'. The second table is titled 'Wireless Devices (Wireless intruders also show up here)' and has the same five columns, but it is currently empty.


Refresh				
Wired Devices				
#	IP Address	Device Name	MAC Address	Virtual MAC Address
1	192.168.1.128	TECHPUBS	00:1A:6B:6D:8F:19	02:0F:B5:6D:8F:19
Wireless Devices (Wireless intruders also show up here)				
#	IP Address	Device Name	MAC Address	Virtual MAC Address

Back Up and Manage Booster Settings

You can save and retrieve a file containing your booster configuration settings. Once you have your booster working correctly, you should back up the information to have it available if something goes wrong. When you back up the settings, they are saved as a file on your computer. You can restore the device's settings from this file.

➤ To back up settings:

- 1 Select **Maintenance > Backup Settings** to display this screen.

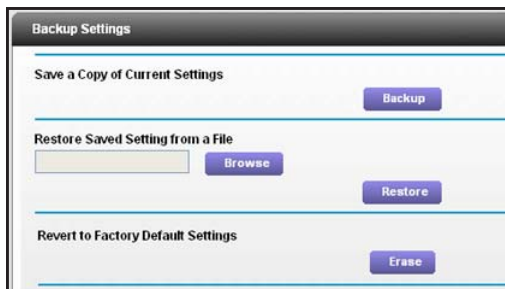

- 2 Click **Backup**. Your browser extracts the configuration file from the booster.
3. If you do not have your browser set up to save downloaded files automatically, locate where you want to save the file.
4. You can give the file a meaningful name at this time, such as internet_adapter.cfg.

➤ To restore settings:

1. On the Backup Settings screen, click **Browse**.
2. Locate and select the previously saved backup file.
3. Click **Restore**.

A screen displays letting you know that the device has been successfully restored to the previous settings. The booster restarts, which takes about 1 minute.



CAUTION:

Do not try to go online, turn off the booster, shut down the computer, or do anything else to the booster until it finishes restarting.

4. Close the message window.

➤ **To erase settings:**

Under some circumstances (for example, if you have lost track of the changes that you made to the booster settings), you might want to erase the configuration. After an erase, the booster returns to its factory settings (see [Factory Settings](#) on page 30).

To erase the configuration, click the **Erase** button in the Backup Settings screen. The booster automatically shuts down and reboots with its factory settings.



CAUTION:

Do not try to go online, turn off the booster, shut down the computer, or do anything else to the booster until it finishes restarting.

Set the Password

The user name to access the booster is admin, and its default password is password. NETGEAR strongly recommends that you set a more secure password.

➤ **To set the password:**

1. Select **Maintenance > Set Password**. The following screen displays:

The screenshot shows a web browser window titled "Set Password". At the top right, there are two buttons: "Apply" (green) and "Cancel" (purple). Below the buttons, there are three input fields stacked vertically. The first field is labeled "Old Password". The second field is labeled "Set Password". The third field is labeled "Repeat New Password".

2. Type the old password, type the new password twice, and then click **Apply**.

Upgrade the Firmware

Unless you changed the settings in the Firmware Update screen previously, the booster is set up to check for new firmware automatically at log in.

➤ **To check for firmware and upgrade if it is available:**

1. Select **Maintenance > Firmware Update**. The following screen displays:

2. Click **Check** to see if new firmware is available. If it is, follow the onscreen prompts to download it onto your computer.
3. In the Browse field, enter the path for the new firmware, or click **Browse** to locate and select the file.
4. Click **Upload** to install the new firmware on your booster.



CAUTION:

Once you start the firmware upgrade, do not try to go online, turn off the booster, shut down the computer, or do anything else to the booster until it finishes restarting!

Advanced Settings

You can view or change advanced wireless settings.

Advanced Wireless Settings

The booster is already configured with the optimum settings. Do not alter these settings unless you have a specific reason to do so. Incorrect settings might disable the booster unexpectedly.

➤ **To view or change the advanced wireless settings:**

Select **Advanced > Wireless Settings**. The following screen displays:


You can view or configure the following settings:

- **Advanced Wireless Settings:**
 - **Enable Wireless Access Point (2.4 GHz).** Enable the booster to work as a wireless access point. If this check box is cleared, then computers or wireless devices cannot connect wirelessly to the booster.
 - **Enable SSID Broadcast (2.4 GHz).** Enable the booster to broadcast its wireless network name (SSID). If this check box is cleared, then the wireless network is hidden. To join a hidden wireless network, you have to type the wireless name.
 - **Enable Wireless Access Point (5 GHz).** Enable the booster to work as a wireless access point. If this check box is cleared, then computers or wireless devices cannot connect wirelessly to the booster.
 - **Enable SSID Broadcast (5 GHz).** Enable the booster to broadcast its wireless network name (SSID). If this check box is cleared, then the wireless network is hidden. To join a hidden wireless network, you have to type the wireless name.
- **WPS Settings:**
 - **Disable Extender's PIN.** Selecting this check box disables the booster's PIN. The PIN can be used for a WPS wireless connection.
 - **Keep Existing Wireless Settings.** When this check box is selected, the settings in the Wireless Settings screen stay the same when WPS is used for a wireless connection.
- **Wireless Card Access List.** Specify a list of computers or wireless devices that are allowed to connect to the network. If you use an access list, then computers that are not on the list are not allowed to join the wireless network.

➤ **To set up a wireless card access list:**

1. On the Advanced Wireless Settings screen, click **Setup Access List**.

The following screen displays:

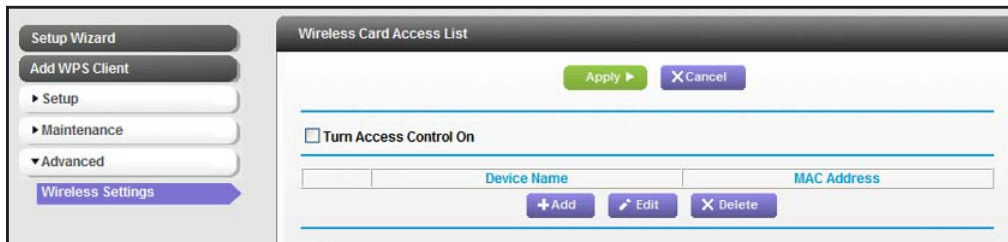

2. Select the **Turn Access Control On** check box.
3. Add the computers and wireless devices that you want to give access to the network.
 - Click the **Add** button for each device.
 - If you are not sure of the MAC address, check the product label.
 - Make sure to add the computer or wireless device that you are currently using.
4. Click **Apply** so that your changes take effect.

3 Troubleshooting

3

This chapter includes the following sections:

- *Frequently Asked Questions*
- *Connecting to <http://www.mywifiext.net>*
- *Joining WiFi Networks*

Frequently Asked Questions

NETGEAR genie keeps asking me for my wireless password, and I am sure I have entered the correct wireless password. What can I do?

It is likely that the booster is placed at the borderline of the range covered by the router. To resolve this, follow the instructions in *Position the Booster* on page 8. If you are using WEP security, make sure that you are typing the wireless key in the correct field.

I connected to NETGEAR_EXT and launched a browser. Why am I unable to see NETGEAR genie?

First, make sure that your computer is set up to use DHCP (most are). Second, make sure that the Wireless Device to Booster LED is solid green and you have a valid IP address. Finally, relaunch the browser, and enter **www.mywifiext.net**.

Will the booster work if I connect it to the router with an Ethernet cable?

No. The booster is designed to connect wirelessly to the router.

I have enabled a wireless MAC filter, also called wireless access control (ACL) on my router. What should I do when installing the booster?

The wireless device MAC address is translated to another MAC address when the wireless device connects to the booster. If your router MAC filter is enabled, the wireless device will not be able to get the IP address from the booster. To allow this wireless device to access the Internet, you must add the translated MAC address into the router.

➤ To get the translated MAC address:

1. Disable the MAC filter on your router.
2. Power on the booster and connect all of your wireless devices to the booster.
3. Make sure that the Link Rate LED remains lit.
4. Log in to your router and check the attached devices on the Attached Devices screen. Add any MAC addresses that begin with **02:0F:B5** into your router's MAC filter table.

Attached Devices			
Wired Devices			
#	IP Address	Device Name	MAC Address
1	192.168.1.7	SQA-PERF-PC	D4BE D98A B590
Wireless Devices (Wireless intruders also show up here)			
#	IP Address	Device Name	MAC Address
1	192.168.1.8	optiplex-930c99	02:0F:B5:C4:7C:C8
2	192.168.1.10	sqa-dell_5300	02:0F:B5:28:31:20
3	192.168.1.250	WN2500RP	02:0F:B5:3C:59:E3
4	--	--	E0:24:B2:3C:59:E4
5	192.168.1.10	sqa-dell_5300	02:0F:B5:28:31:20
6	--	--	E2:24:B2:3C:59:E4

My router security is WEP, and I entered the wrong passphrase or security key on the booster. I cannot access the booster any more. What can I do?

The booster cannot check to see if the WEP passphrase is correct. If you entered the wrong passphrase, your wireless device is not able to get the IP address from the booster. You must reset the booster to the factory defaults to get the IP address back.







I have completed the Installation Wizard, but my wireless devices cannot get the IP address from the booster. What should I do?

Make sure that the passphrase you entered on your wireless device is correct, and power cycle the booster and your router. If your device is still not able to get the IP address:

1. Move the booster closer to your router, and move your wireless device closer to the booster.
2. Disable the wireless interface and enable it again to see if your wireless device can get the IP address.
3. If your router has a MAC filter (wireless access control), disable it, and follow the instructions in the FAQs to add the device's MAC address to your router.

Connecting to <http://www.mywifiext.net>

If you have trouble connecting, try to locate the source of the problem:

- For help with passwords, see *Log In to the Booster* on page 11.
- If your browser displays an error page, make sure that you include *http://* when you type this URL in the address field of your Internet browser. If you leave it out, you might not be able to connect.
- The booster LEDs can help you tell if the booster is correctly set up and working as it should.
 - The best performance is delivered when Link Rate LED  or  and the Wireless Device to Booster LED  are green.
 - A workable performance is delivered when the Link Rate LED LED  or  is amber and the Wireless Device to Booster LED  is green.

Joining WiFi Networks

To join a WiFi network you have to know its network name (also called the SSID) so that you can select it. If the network is secure, you have to know the passphrase or wireless key. If the booster does not connect to the network that you selected, the following message displays:

Connection was not established to the selected network.

If this happens, it could be for one of these reasons:

- The network name, passphrase, or key might have been typed incorrectly. Click **Cancel**, use the Smart Wizard to select the network from the list, and retype the passphrase or key. This is case-sensitive. PASSWORD25 is not the same as Password25 or password25. See [Log In to the Booster](#) on page 11.
- If the Smart Wizard does not find your wireless network (it is not displayed in the Select Existing Network screen), check to see if your wireless network is still up and running. Make sure that the router is turned on. If possible, move the booster closer to the router and click **Try Again**.
- If the booster Link Rate LED is red, this indicates a poor wireless connection. The best connection is established when there is a clear line of sight between the booster and the router you are connecting to. Make sure that there are no physical obstacles between the booster and the router, and try to move the booster closer to the router.

If you use the Smart Wizard, and the booster cannot connect to the router or cannot get an IP address from the router, it displays the following message:

*You are not able to connect to the Internet. Click **Continue** to run through set up again to connect to your network.*

If you click **Continue**, the Smart Wizard starts again. If you click **Exit**, the Status screen displays.



Factory Settings

You can press and hold the **Factory Settings** button on the side panel for 7 seconds. The booster resets, and returns to its factory settings.

Table 1.

Factory Settings		
Smart Wizard		Enabled
Wireless	Wireless communication	Enabled
	Wireless Network Name (SSID)	NETGEAR_EXT
	Security	Disabled
	Transmission speed	Auto ¹
	Country/Region	United States (varies by region)
	Operating mode	802.11n, 802.11g, 802.11b
	Data rate	Up to 150 Mbps

1. Maximum wireless signal rate (IEEE Standard 802.11). Actual throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate.

Technical Specifications

Table 2.

Technical Specifications	
Network protocol and standards compatibility	Data and Routing Protocols: TCP/IP, DHCP server and client
AC input	100-240V, 0.2A (Max.)
Physical specifications	<ul style="list-style-type: none"> • Dimensions: 67 x 55 x 52 mm (2.63 x 2.17 x 2 in) • Weight: 0.086 kg (3 oz)
Environmental	<ul style="list-style-type: none"> • Operating temperature: 32° to 140° F (0° to 40° C) • Operating humidity: 90% maximum relative humidity, non condensing • Electromagnetic emissions: Meets requirements of: FCC Part 15 Class B.
Interface	802.11n/g/b

Compliance Notification



Regulatory Compliance Information

This section includes user requirements for operating this product in accordance with National laws for usage of radio spectrum and operation of radio devices. Failure of the end-user to comply with the applicable requirements may result in unlawful operation and adverse action against the end-user by the applicable National regulatory authority.

Note: This product's firmware limits operation to only the channels allowed in a particular Region or Country. Therefore, all options described in this user's guide may not be available in your version of the product.

FCC Requirements for Operation in the United States

FCC Information to User

This product does not contain any user serviceable components and is to be used with approved antennas only. Any product changes or modifications will invalidate all applicable regulatory certifications and approvals

FCC Guidelines for Human Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC Declaration of Conformity

We, NETGEAR, Inc., 350 East Plumeria Drive, San Jose, CA 95134, declare under our sole responsibility that the WiFi Booster for Mobile WN1000RP complies with Part 15 Subpart B of FCC CFR47 Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

FCC Radio Frequency Interference Warnings & Instructions

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following methods:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an electrical outlet on a circuit different from that to which the radio receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- This transmitter must not be co-located or operation in conjunction with any other antenna or transmitter.

Note: The country code selection is for non-US models only and is not available to all US models. Per FCC regulation, all Wi-Fi products marketed in the US must be fixed to US operation channels only.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Industry Canada Statement

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Radiation Exposure Statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Declaration d'exposition aux radiations: Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Europe – EU Declaration of Conformity



Marking with the above symbol indicates compliance with the Essential Requirements of the R&TTE Directive of the European Union (1999/5/EC).

This equipment meets the following conformance standards:

- EN300 328 (2.4Ghz), EN301 489-17, EN60950-1, EN301 489-1, EN62311
- This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries, except in France and Italy where restrictive use applies.
- In Italy, the end-user should apply for a license at the national spectrum authorities in order to obtain authorization to use the device for setting up outdoor radio links and/or for supplying public access to telecommunications and/or network services.
- This device may not be used for setting up outdoor radio links in France, and in some areas the RF output power may be limited to 10 mW EIRP in the frequency range of 2454 – 2483.5 MHz. For detailed information contact the national spectrum authority in France.

For complete DoC EU Declarations of Conformity, visit http://kb.netgear.com/app/answers/detail/a_id/11621/.

Table 3. EDOC in Languages of the European Community

Language	Statement
Cesky [Czech]	<i>NETGEAR Inc.</i> tímto prohlašuje, že tento Radiolan je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
Dansk [Danish]	Undertegnede <i>NETGEAR Inc.</i> erklærer herved, at følgende udstyr Radiolan overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Deutsch [German]	Hiermit erkläre <i>NETGEAR Inc.</i> , dass sich das Gerät Radiolan in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
Eesti [Estonian]	Käesolevaga kinnitab <i>NETGEAR Inc.</i> seadme Radiolan vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
English	Hereby, <i>NETGEAR Inc.</i> , declares that this Radiolan is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Español [Spanish]	Por medio de la presente <i>NETGEAR Inc.</i> declara que el Radiolan cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ <i>NETGEAR Inc.</i> ΔΗΛΩΝΕΙ ΟΤΙ Radiolan ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
Français [French]	Par la présente <i>NETGEAR Inc.</i> déclare que l'appareil Radiolan est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Italiano [Italian]	Con la presente <i>NETGEAR Inc.</i> dichiara che questo Radiolan è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviski [Latvian]	Ar šo <i>NETGEAR Inc.</i> deklarē, ka Radiolan atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo <i>NETGEAR Inc.</i> deklaruoja, kad šis Radiolan atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
Nederlands [Dutch]	Hierbij verklaart <i>NETGEAR Inc.</i> dat het toestel Radiolan in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
Malti [Maltese]	Hawnhekk, <i>NETGEAR Inc.</i> , jiddikjara li dan Radiolan jikkonforma mal-htigijiet essenzjali u ma provvedimenti ohrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Table 3. EDOC in Languages of the European Community (Continued)

Language	Statement
Magyar [Hungarian]	Alulírott, <i>NETGEAR Inc.</i> nyilatkozom, hogy a Radiolan megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
Polski [Polish]	Niniejszym <i>NETGEAR Inc.</i> oświadcza, że Radiolan jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
Português [Portuguese]	<i>NETGEAR Inc.</i> declara que este Radiolan está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
Slovensko [Slovenian]	<i>NETGEAR Inc.</i> izjavlja, da je ta Radiolan v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Slovensky [Slovak]	<i>NETGEAR Inc.</i> týmto vyhlasuje, že Radiolan spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
Suomi [Finnish]	<i>NETGEAR Inc.</i> vakuuttaa täten että Radiolan tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Svenska [Swedish]	Härmed intygar <i>NETGEAR Inc.</i> att denna Radiolan står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.
Íslenska [Icelandic]	Hér með lýsir <i>NETGEAR Inc.</i> yfir því að Radiolan er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC.
Norsk [Norwegian]	<i>NETGEAR Inc.</i> erklærer herved at utstyret <i>Radiolan</i> er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF.

Interference Reduction Table

The table below shows the recommended minimum distance between NETGEAR equipment and household appliances to reduce interference (in feet and meters).

Table 4. Interference reduction table

Household Appliance	Recommended Minimum Distance (in feet and meters)
Microwave ovens	30 feet / 9 meters
Baby Monitor - Analog	20 feet / 6 meters
Baby Monitor - Digital	40 feet / 12 meters
Cordless phone - Analog	20 feet / 6 meters
Cordless phone - Digital	30 feet / 9 meters
Bluetooth devices	20 feet / 6 meters
ZigBee	20 feet / 6 meters